



BE
SMART
POWER
SMART

PRODUCT
CATALOGUE
2026

ABOUT US



Neon Light House is a pioneering company established in 2013, specializing in the design, manufacture, and distribution of high-quality LED lighting solutions. Over the years, the company has grown to become a trusted name in the LED lighting industry, known for its innovation, reliability, and customer-centric approach.

Vision

To illuminate the world with sustainable and energy-efficient LED lighting solutions, enhancing the quality of life and promoting environmental stewardship.

Mission

- To deliver top-notch LED lighting products that meet and exceed customer expectations.
- To continually innovate and incorporate the latest technologies in our product offerings.
- To provide exceptional customer service and support.
- To contribute to a greener planet by promoting energy-saving and Eco-friendly lighting solutions.

Products and Services

Neon Light House offers a wide range of products and services, including:

Residential LED Lighting: Solutions for homes, including bulbs, strips, and fixtures.

Commercial LED Lighting: Tailored lighting for offices, retail spaces, and industrial environments.

Architectural Lighting: Customized lighting designs for buildings and landmarks.

Outdoor and Landscape Lighting: Durable and energy-efficient lighting for outdoor spaces.

Goals

Expand Market Reach:

Increase presence in global markets through strategic partnerships and distribution channels.

Product Diversification:

Develop new products to cater to emerging market trends and customer needs.

Sustainability:

Enhance sustainability practices, aiming for a significant reduction in carbon emissions by 2025.

Technological Advancements:

Invest in research and development to stay ahead in the LED lighting industry.

Customer Experience:

Continuously improve customer service and support to ensure the highest levels of satisfaction.

Contents



ROYAL EDITION	1-9
RECESSED SPOT LIGHT	10-23
RECESSED PANEL & DOWN LIGHT	24-33
SURFACE PANEL & DOWN LIGHT	34-46
SURFACE & TRACK SPOT LIGHT	47-53
MAGNETIC PROFILE LIGHT	54-64
STRIP LIGHT	65-68
CURTAIN STRIP	69
DRIVER	70-72
ROPE LIGHT	73-77
LED BULB	78-81
WALL PICTURE LIGHT	82-89
CONTROLLER	90-92
MOTION SENSOR	93-99
CABINET PROFILE LIGHT	110-128
PROFILE	110-128
PROFILE HANGING LIGHT	129-133
SILICONE PROFILE LIGHT	134-142
CONNECTOR & JOINTER	143




SMART CONTROLLER DRIVER	144
DALI DRIVER	145
OUT DOOR WALL LIGHT	146-174
GATE LIGHT	175-180
BOLLARD LIGHT	181-191
OUTDOOR SURFACE LIGHT	192-195
FOOT LIGHT	196-199
SPIKE LIGHT	200-209
UNDERWATER LIGHT	210-214
WALL GRAZER LIGHT	215-218
SOLAR LIGHT	219-221
STREET & FLOOD LIGHT	222-225
POLE LIGHT	143-247
LUMINOUS BARRICADE LIGHT	243-246
IP CONNECTOR & DRIVER	247
FIBER OPTIC	248
FACADE LIGHT	249






Royal
EDITION

RICH




WATT	DIMENSION	CUTOUT
8W	D65xH47	Ø60
15W	D80xH58	Ø75

CCT



BODY COLOUR



BEAM ANGLE



TOYONIA

Material : ALUMINIUM



WORK WITH TUYA




APP CONTROL




2.4 GHz

POSH




WATT	DIMENSION	CUTOUT
8W	D65xH47	Ø60
15W	D80xH58	Ø75

CCT



BODY COLOUR



BEAM ANGLE



TOYONIA

Material: ALUMINIUM



WORK WITH TUYA




APP CONTROL



2.4 GHz

HOLE



WATT	DIMENSION	CUTOUT
8.3W	D34xH76	Ø32
12.5W	D34xH91	Ø32

CCT



BODY COLOUR




BEAM ANGLE



Material: ALUMINIUM


bridgelux.

NOBEL



WATT	DIMENSION	CUTOUT
8.3W	D36xH76	Ø32
12.5W	D36xH91	Ø32

CCT



BODY COLOUR



BEAM ANGLE



CRI 90


IP20

PF >0.90

Material : ALUMINIUM


bridgelux®

WIND



WATT	DIMENSION	CUTOUT
8.3W	D36xH76	Ø32
12.5W	D36xH91	Ø32

CCT



BODY COLOUR



BEAM ANGLE



CRI 90


IP20

PF >0.90

Material : ALUMINIUM


bridgelux®

RETRO



WATT	DIMENSION	CUTOUT
8W	D65xH83.5	Ø58
15W	D65xH108	Ø58

CCT



BODY COLOUR




BEAM ANGLE



TOYONIA


Material : ALUMINIUM

THIN



WATT	DIMENSION	CUTOUT
8W	D49X74.5	ø43
15W	D60X84.5	ø55
20W	D79.5X104.5	ø75

CCT



BODY COLOUR




BEAM ANGLE




Material : ALUMINIUM

FINE



WATT	DIMENSION	CUTOUT
10W	D49X92	Ø35
15W	D52X99	Ø45

CCT



BODY COLOUR




BEAM ANGLE




SEOUL
Material: ALUMINIUM

PINKY



WATT	DIMENSION	CUTOUT
3W	D30XH40	Ø25
5W	D42XH60	Ø35

CCT



BODY COLOUR




BEAM ANGLE




bridgelux.
Material: ALUMINIUM

BEAM



WATT	DIMENSION	CUTOUT
5W	D40xH45	Ø34
10W	D50xH55	Ø44

CCT



3K 4K 5K 6K

BODY COLOUR



BK WH

BEAM ANGLE




24° CRI 90 IP20 PF >0.90

Material : ALUMINIUM

bridgelux.

POINT



WATT	DIMENSION	CUTOUT
5W	D53xH40	Ø45

CCT



3K 4K

BODY COLOUR



GUN BK

BEAM ANGLE




5° CRI 90 IP20 PF >0.90

Material : ALUMINIUM

TOYONIA


MAC



WATT	DIMENSION	CUTOUT	CCT				BODY COLOUR		BEAM ANGLE			
15W	D85xH65	Ø75								CRI 90	IP54	PF >0.90
			3K	4K	5K	6K	WH	BK				

TWICE


bridgelux.
Material: ALUMINIUM



WATT	DIMENSION	CUTOUT	CCT				BODY COLOUR		BEAM ANGLE			
2X12W	L165XW85XH59	Ø155X75								CRI 90	IP20	PF >0.90
			3K	4K	5K	6K	WH	MATT BK				


bridgelux.
Material: ALUMINIUM

BREEZE



WATT	DIMENSION	CUTOUT
6W	L110xW20xH29	Ø105xw15
12W	L210xW20xH29	Ø1205xw15
18W	L307xW20xH29	Ø1301xw15

CCT



BODY COLOUR





BEAM ANGLE



TIANDIAN


Material : ALUMINIUM

RINGER



WATT	DIMENSION
10W	L67XW37XH117
15W	L67XW63XH117

CCT



BODY COLOUR




BEAM ANGLE




bridgelux.
Material: ALUMINIUM

ROTA



WATT	DIMENSION
15W	D90xH120

CCT



BODY COLOUR



BEAM ANGLE



bridgelux.
Material: ALUMINIUM




**RECESSED
SPOT LIGHT**

FLIP




THE IDEAL
Light for
YOUR
INTERIORS

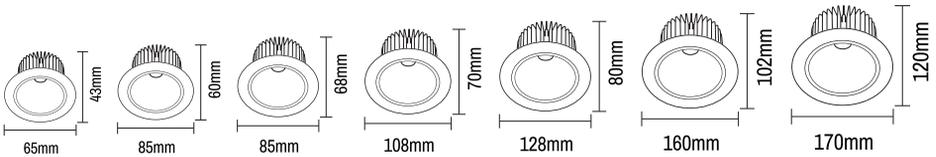

WATT	DIMENSION	CUT OUT
3W	D65XH43	Ø55
7W	D85XH60	Ø69
12W	D85XH68	Ø69
18W	D108XH70	Ø92
24W	D128XH80	Ø115
30W	D160XH102	Ø135
50W	D170XH120	Ø150

CCT



3K 4K 5K 6K

Material : Aluminium

BODY COLOUR



BK WH

BEAM ANGLE



CRI
85

IP20

PF
>0.95


bridgelux.

SHINE





WATT	DIMENSION	CUT OUT
7W	D62XH81	Ø55
16W	D82XH82	Ø75

CCT



Material : Aluminium

BODY COLOUR



BEAM ANGLE




SHINE TRIMLES



WATT	DIMENSION	CUT OUT
7W	D80XH81	Ø55
16W	D100XH82	Ø75

CCT




Material : Aluminium

BODY COLOUR



BEAM ANGLE



NUE



MATTE BLACK



GUN BLACK




MATTE GOLD




MATTE WHITE




ROSE GOLD



75mm




85mm



95mm

WATT	DIMENSION	CUT OUT
7W	D75XH55	Ø60
12W	D85XH65	Ø75
20W	D95XH75	Ø85

CCT



Material : Aluminium



BODY COLOUR




BEAM ANGLE




WORK WITH TUYA APP CONTROL 2.4 Ghz

PYRAMID



WATT	DIMENSION	CUTOUT
7W	D65XH65	55
12W	D85XH73	75
18W	D102XH86	95

CCT



BODY COLOUR




BEAM ANGLE




bridgelux[®] Material: ALUMINIUM

MOST



WATT	DIMENSION	CUTOUT
7W	D63XH55	55
12W	D80XH60	75
18W	D95XH62	85

CCT



BODY COLOUR




BEAM ANGLE



Material: ALUMINIUM


bridgelux[®]

WIDE



WATT	DIMENSION	CUT OUT
7W	D62XH60	Ø53
12W	D82XH72	Ø71
18W	D90XH95	Ø80

CCT




Material : Aluminium

BODY COLOUR



BEAM ANGLE




WORK WITH TUNIA



APP CONTROL



2.4 GHz



WATT	DIMENSION	CUT OUT
7W	D74XH60	Ø63
12W	D85XH75	Ø75
18W	D90XH85	Ø78

CCT



Material : Aluminium

BODY COLOUR



BEAM ANGLE



WORK WITH TUNIA



APP CONTROL




2.4 GHz

BOLT



WATT	DIMENSION	CUT OUT
8W	D69XH46	Ø60
15W	D83XH55	Ø75
20W	D96XH65	Ø88

CCT



Material : Aluminium

BODY COLOUR



BEAM ANGLE



WORK WITH TUYA



APP CONTROL



2.4 GHz



BOLT PRO




WATT	DIMENSION	CUT OUT
8W	D69XH46	Ø60
15W	D83XH55	Ø75
20W	D96XH65	Ø88

CCT



Material : Aluminium

BODY COLOUR



BEAM ANGLE



WORK WITH TUYA



APP CONTROL



2.4 GHz



BOLT PLUS



WATT	DIMENSION	CUT OUT
8W	D69XH46	Ø60
15W	D83XH55	Ø75
20W	D96XH65	Ø88

CCT

Material : Aluminium


BODY COLOUR



BEAM ANGLE



CENT



WATT	DIMENSION	CUT OUT
1W	D30XH20	Ø25

CCT

BODY COLOUR


BEAM ANGLE



Material : Aluminium




NEST

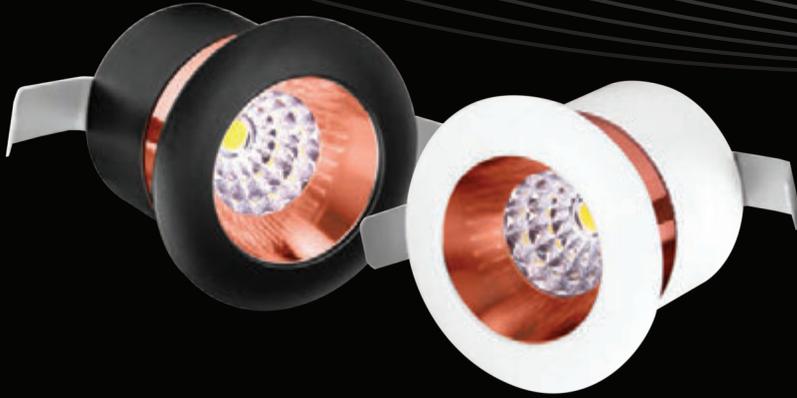

WATT	DIMENSION	CUT OUT
1W	D31XH25	Ø25

CCT





Material : Aluminium

BODY COLOUR



BEAM ANGLE




BEE



WATT	DIMENSION	CUT OUT
2W	D40XH19	Ø30

CCT




BODY COLOUR



Material : PC VIRGIN

BEAM ANGLE



DUPLEX




WATT	DIMENSION	CUT OUT
1W	D19XH25	Ø14

CCT	BODY COLOUR			
 3K	 BK	 WH	 SILVER	

Material : Aluminium

BEAM ANGLE	
 18°	CRI 80
IP20	PF >0,95



bridgelux®

GOLDY




WATT	DIMENSION	CUT OUT
7W	D110XH48	Ø75

CCT		
 3K	 6K	 RBP

Material : PC VIRGIN

BODY COLOUR	BEAM ANGLE
 WH+CP	 110°
	CRI 80
	IP20
	PF >0,75



bridgelux®


WEE



WATT	DIMENSION	CUT OUT
3W	D37XH28	Ø32



CCT




Material - Aluminium

BODY COLOUR



BEAM ANGLE



PLUTO



WATT	DIMENSION	CUT OUT
3W	D67XH33	Ø54



CCT





Material - PC VIRGIN


BODY COLOUR





BEAM ANGLE



SPIDER

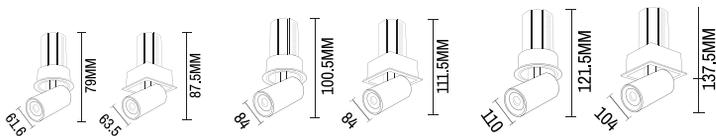

WATT	DIMENSION	CUT OUT
7W	R-61.6X79	55
	S-63.5X87.5	55X55
12W	R-84X100.5	75
	S-84X111.5	75X75
20W	R-104X121.5	95
	S-104X137.5	95X95
2X7W	R-139.5XH84	130X55
	S-123.5X68.5XH84	120X55
2W12W	R-139.8XH111.7	175X75
	S-180X90.5XH111.7	165X75

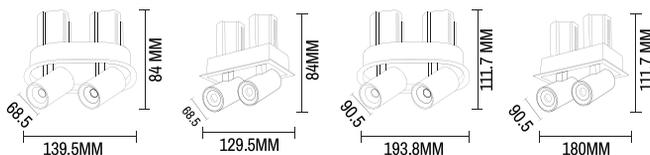


LINE



WATT	DIMENSION	CUT OUT
3X3W	95X45X32	85X35
5X3W	146X45X32	137X35
10X3W	280X45X32	270X35

CCT




BODY COLOUR



BEAM ANGLE




Material : Aluminium

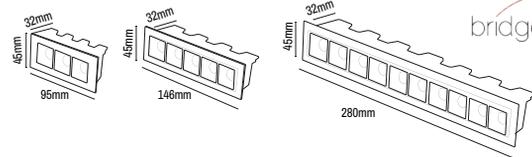


bridgelux.

DRONE



WATT	DIMENSION	CUTOUT
18W	D110	Ø95
30W	D165	Ø145

CCT



BODY COLOUR



BEAM ANGLE



bridgelux.


Material : ALUMINIUM

OPTIC LINE



WATT	DIMENSION	CUT OUT
3X2W	62X32X40	51x21
6X2W	108X32X40	97x21



CCT



BODY COLOUR



Material : Aluminium






bridgelux.

BEAM ANGLE



MAGIC LINE



WATT	DIMENSION	CUTOUT
3X4W	137X60XH55MM	128X50MM
4X4W	95X95XH55MM	85X85MM
5X4W	210X60X55MM	205X50MM

CCT



BODY COLOUR




Material : ALUMINIUM

BEAM ANGLE





bridgelux.

LINE PRO



WATT	DIMENSION	CUTOUT
2X12W	L165XW85XH80	L154XW75




BEAM ANGLE




Material : ALUMINIUM



TWIN



WATT	DIMENSION	CUTOUT
2X10W	87X52X52	75X45



BODY COLOUR



BEAM ANGLE



Material : ALUMINIUM




WORK WITH TWIN



APP CONTROL




2.4 GHz

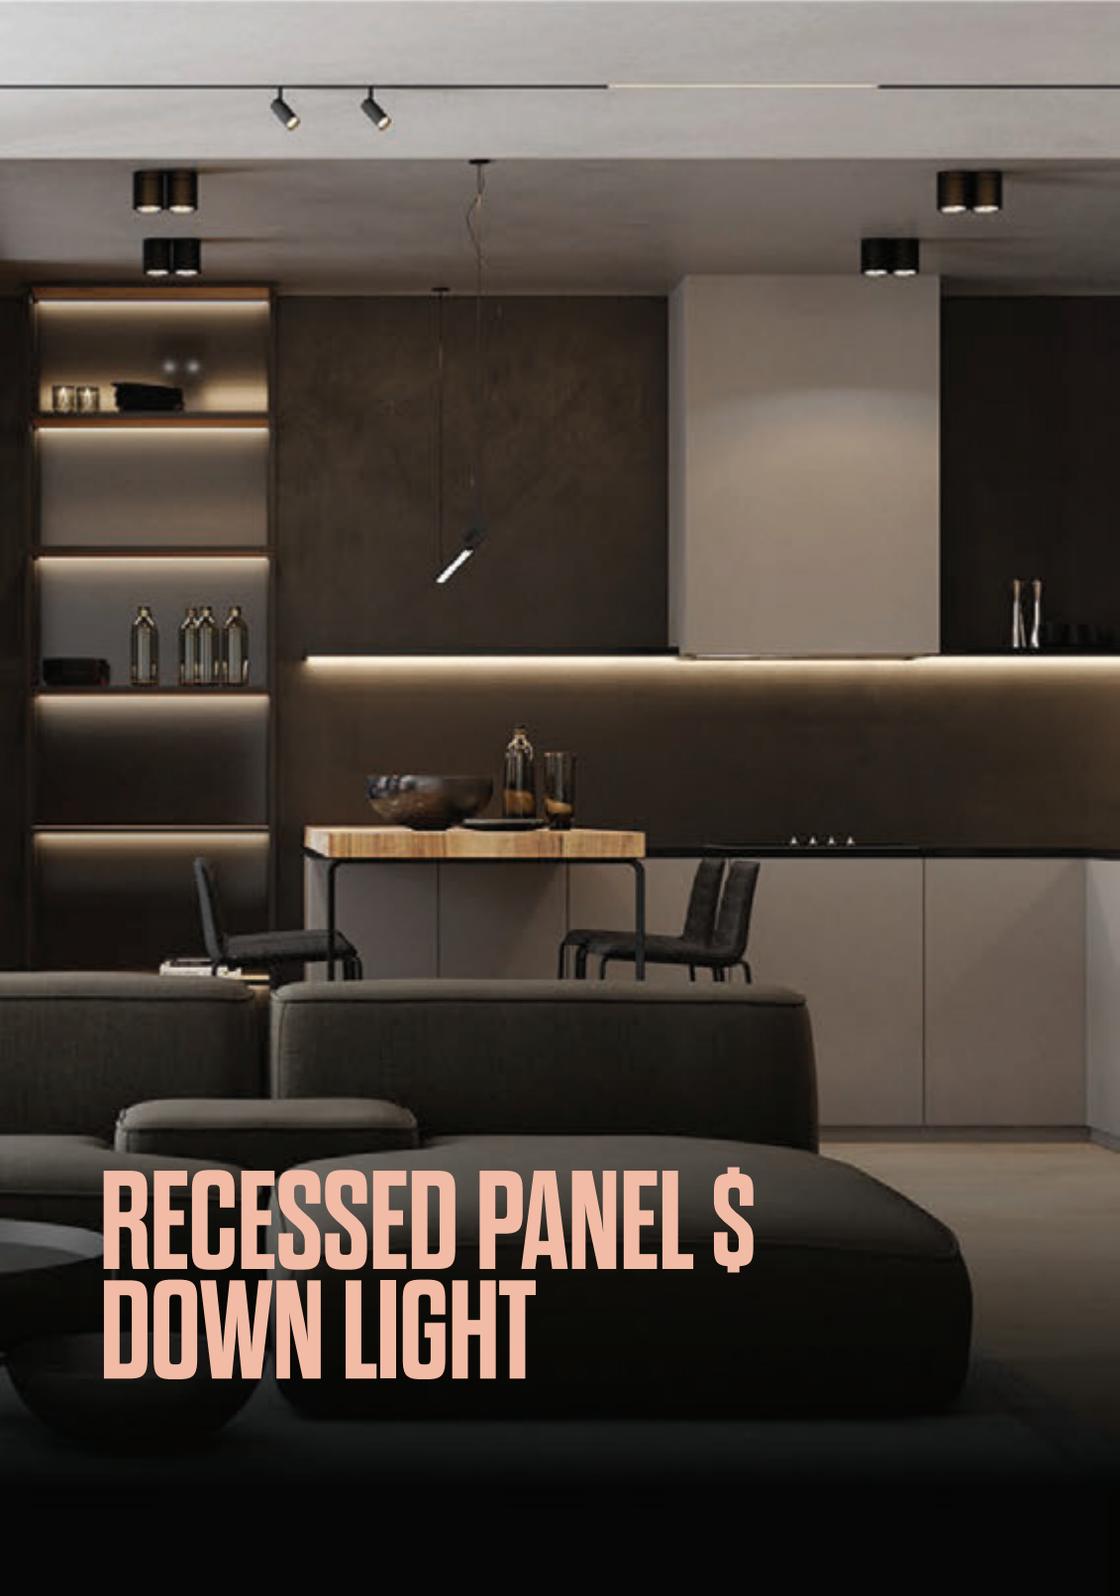


**RECESSED PANEL \$
DOWN LIGHT**

SPLENDOR



WATT	DIMENSION	CUT OUT
12W	D82XH42	Ø74
18W	D104XH44	Ø94
24W	D133XH46	Ø119

CCT



Material - Aluminium

PRESMETIC DIFFUSER

BODY COLOUR



BEAM ANGLE



CRI
90

IP20

PF
>0.97

OSRAM



WORK WITH TUTA APP CONTROL 2.4 GHz

GLORY



WATT	DIMENSION	CUT OUT
12W	D90XH52	Ø85
18W	D110XH52	Ø95
24W	D125XH52	Ø120

CCT



Material : Aluminium

BODY COLOUR

WH BK


BEAM ANGLE

110°

CRI 85

IP20

PF >0.95

DARK



WATT	DIMENSION	CUT OUT
12W	D85XH46	Ø75
18W	D115XH46	Ø105
24W	D165XH46	Ø155

CCT

Switch CCT



Material : Aluminium

BODY COLOUR

BK WH


BEAM ANGLE

120°

CRI 80

IP20

PF >0.85

TEXLA



WATT	DIMENSION	CUT OUT
12W	D122XH51	Ø112
18W	D155XH51	Ø145

CCT



Material : PC VIRGIN

BODY COLOUR



BK WH


BEAM ANGLE



CRI
80

IP20

bridgelux.
PF >0.85



ZETA



WATT	DIMENSION	CUT OUT
12W	D118XH51	Ø110
18W	D153XH55	Ø145
24W	D175XH55	Ø167

CCT



Material : Aluminium

BODY COLOUR



WH BK

BEAM ANGLE




CRI
85

IP20


PF
>0.95

bridgelux.



WORK WITH TUYA APP CONTROL 2.4 GHz

CORAL



WATT	DIMENSION	CUT OUT
8W	90X90	75X75
15W	145X145	125X125
22W	170X170	150X150

CCT

3K 4K 6K

BODY COLOUR

BK WH


BEAM ANGLE

160° CRI 80 IP20 PF >0.85

Material : Aluminium

bridgelux.

PREMIUM



WATT	DIMENSION	CUT OUT
8 W	115x115	100x100
15W	165x165	146x146
22W	215x215	200x200

CCT

3K 4K 6K

BODY COLOUR

WH

BEAM ANGLE

160° CRI 80 IP20 PF >0.85

Material : Aluminium

bridgelux.

PLEX



WATT	DIMENSION	CUT OUT
8W	115X115	96X96
12W	143X143	125X125
15W	165X165	150X150
18W	165X165	150X150
24W	220X220	200X200

CCT



Material :PC VIRGIN

BODY COLOUR



WH



BEAM ANGLE



PLEX RING




WATT	DIMENSION
8W	100X100
12W	125X125
15W/18W	150X150

BODY COLOUR





WH

MATERIAL
PC VIRGIN



TRIO

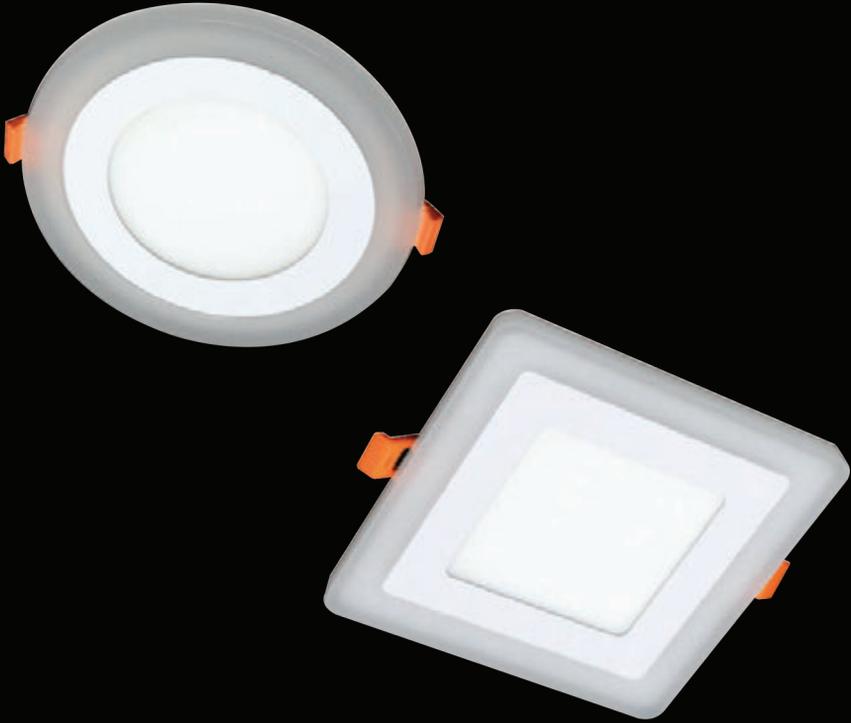

WATT	DIMENSION	CUT OUT
3+3	100X35	65
6+3	148X35	110
12+4	170X35	140

CCT



Material : Aluminium

BODY COLOUR



BEAM ANGLE



CRI
80

IP20

PF
>0.80

bridgelux.

SLIDO



BODY COLOUR



WH

BEAM ANGLE



CRI
80

IP20

PF
>0.80


WATT	DIMENSION	CUT OUT
10W	85X20	55X77
15W	120X20	55X95
22W	170X20	55X150
32W	220X20	55X190

CCT




EPISTAR

Material : Aluminium




WATT	DIMENSION	CUT OUT
10W	85x20	55X77

CCT



WATT	DIMENSION	CUT OUT
10W	85x20	55X77
15W	120x20	55x95

CCT




UFO



WATT	DIMENSION	CUT OUT
7+7	D87X20	Ø50
15+15	D115X20	Ø50

bridgelux®

CCT



Material :PC VIRGIN

BODY COLOUR





BEAM ANGLE



CRI
80

IP20

PF
>0.75



LILY



WATT	DIMENSION	CUT OUT
5W	D80XH45	Ø46

bridgelux.

CCT





Material :PC VIRGIN

BODY COLOUR



BEAM ANGLE



ALTO



WATT	DIMENSION	CUT OUT
3W	D80XH36	Ø55

bridgelux.

CCT




Material :PC VIRGIN


BODY COLOUR



BEAM ANGLE



JUMBO PANEL

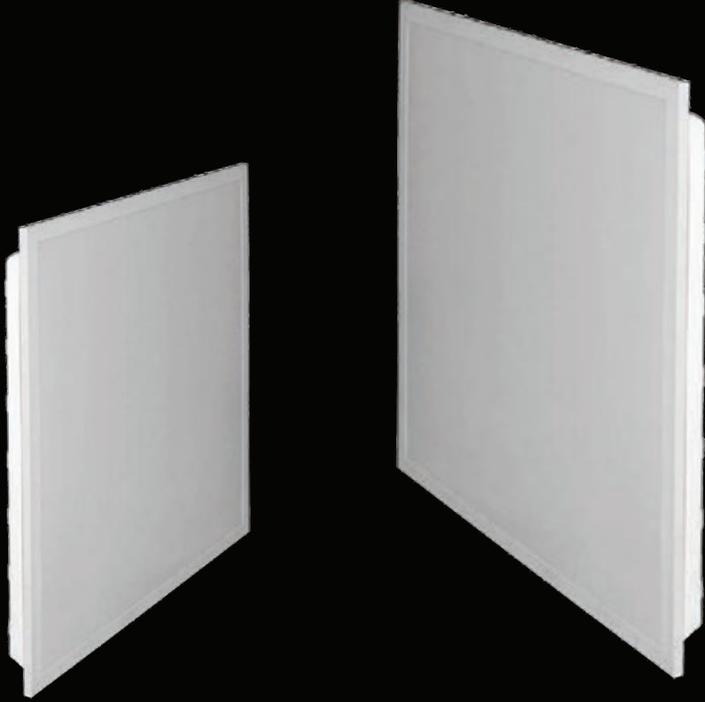

WATT	DIMENSION	CUT OUT
48W	590X590	570X570

CCT

4K 6K

Material -Aluminium

BODY COLOUR

WH



BEAM ANGLE




160°

CRI
80

IP20


PF
>0.95





**SURFACE PANEL \$
DOWN LIGHT**

STYLO PLUS



WATT	DIMENSION
6W	D75XH75
15W	D110XH75
22W	D125XH75

CCT



BODY COLOUR



BEAM ANGLE



Material : Aluminium



STYLO



WATT	DIMENSION
12W	D88xH45
18W	D100xH50

CCT



BODY COLOUR



BEAM ANGLE




CRI 85

IP20

PF >0.90

Material : Aluminium





TRIMO



WATT	DIMENSION
6W	90X30
12W	125X30
18W	150X30

CCT



Material : PC VIRGIN



BODY COLOUR




BEAM ANGLE




CRI 80

IP20

PF >0.80




AUDI



WATT	DIMENSION
8W	96x35
15W	155x35
22W	180x35

CCT



Material : Aluminium

BODY COLOUR



BEAM ANGLE




bridgelux.


CORAL SF



WATT	DIMENSION
8W	90X90
15W	145X145
22W	170X170



CCT



Material : Aluminium

BODY COLOUR




BEAM ANGLE




bridgelux.

BLISS

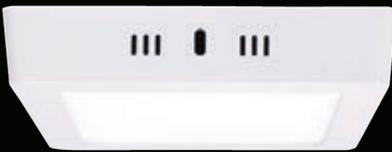

WATT	DIMENSION
8W	115X115
15W	165X165
22W	215X215

CCT



Material : Aluminium

BODY COLOUR




BEAM ANGLE



bridgelux.

TRIN SF



WATT	DIMENSION
3+3	100X35
6+3	148X35
12+4	170X35

CCT



Material : Aluminium

BODY COLOUR



BEAM ANGLE



bridgelux.

NLH 3102



WATT	DIMENSION
3W	D60XH30

CCT




Material : Aluminium

BODY COLOUR




BEAM ANGLE



bridgelux.

NLH-702



WATT	DIMENSION
7W	D68XH48

CCT



BODY COLOUR



BEAM ANGLE



Material : Aluminium




DOVE



WATT	DIMENSION
3W	D65XH26

CCT




BODY COLOUR



BEAM ANGLE



Material : Aluminium




HOLLOW



WATT	DIMENSION
3W	D40XH17

CCT




Material : Aluminium

BODY COLOUR



bridgelux.

BEAM ANGLE



MOONY



WATT	DIMENSION
5W	D62XH16

CCT





Material : PC VIRGIN

BODY COLOUR



BEAM ANGLE



GIGA




WATT	DIMENSION
3W	D68XH14

Material : PC VIRGIN

CCT



BODY COLOUR



SLEEK



WATT	DIMENSION
3W	D60XH15

EPISTAR

CCT




BODY COLOUR



Material : Aluminium


BEAM ANGLE



NUE SF



WATT	DIMENSION
7W	D60XH85
12W	D75XH95
20W	D86XH110




Material : Aluminium



BODY COLOUR BEAM ANGLE




CRI 90	PF >0.97	IP20
------------------	--------------------	-------------




NUE SF PRO




WATT	DIMENSION
7W	D60XH85
12W	D75XH95
20W	D86XH110



Material : Aluminium




OVAL

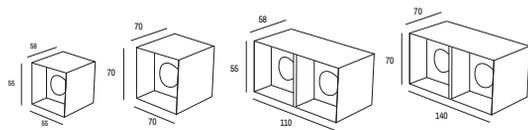

WATT	DIMENSION
7W	L55XW55XH58
12W	L70XW70XH70
2X7W	L110XW55XH58
2X12W	L140XW70XH70

CCT



BODY COLOUR



BEAM ANGLE




Material : ALUMINIUM

bridgelux.

KIA




WATT	DIMENSION
7W	D60xH58
12W	D72xH72
18W	D85xH80





Material : Aluminium

bridgelux.

BODY COLOUR



BEAM ANGLE




PISTA



WATT	DIMENSION
3W	D46XH57
7W	D55XH60
12W	D68XH68
18W	D90XH90
30W	D110XH110

CCT




Material : Aluminium

BODY COLOUR




bridgelux.



BEAM ANGLE




LORD



WATT	DIMENSION
30W	D102XH110
40W	D120XH120

CCT



BODY COLOUR



BEAM ANGLE




bridgelux®
Material : ALUMINIUM



**SURFACE & TRACK
SPOT LIGHT**


SHOOT



WATT	DIMENSION
8W	D45XH160
15W	D45XH180

Material : Aluminium

CCT



BODY COLOUR




BEAM ANGLE




bridgelux.

LONGVIEW



WATT	DIMENSION
12W	D45X80X210

CCT



BODY COLOUR




BEAM ANGLE



Material : Aluminium

bridgelux®

CAM



WATT	DIMENSION
7W	D55XH63
12W	D65XH63

CCT

3K 4K 6K

Material : Aluminium

BODY COLOUR

GUN BK MATT COPPER BRASS GOLD


MATT BK MATT WH

BEAM ANGLE

38° CRI 90 IP20 PF >0.97



CIRCLE 360°




WATT	DIMENSION	CCT				BODY COLOUR		BEAM ANGLE			
12W	D85xH106										

Material : Aluminium

bridgelux®

NAVYWALL



WATT	DIMENSION	CCT				BODY COLOUR		BEAM ANGLE			
12W	D64xH115										
20W	D80xH135										
30W	D89xH155										
50W	D90xH180										


Material : Aluminium

bridgelux®

GROW WALL



GIVING MORE
Light for fewer
RESOURCES.

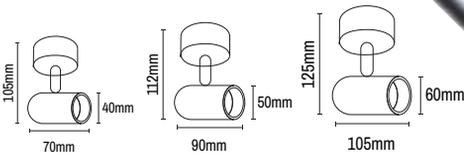

WATT	DIMENSION
3W	D40XL70XH105
6W	D50XL90XH112
9W	D60XL105XH128

CCT

3K	4K	6K	RGB

BODY COLOUR

WH BK

BEAM ANGLE

60°

CRI 80

IP20

PF >0.90


Material : Aluminium

WATT	DIMENSION
24W	D100XL175XH197
30W	D100XL175XH197

CCT

3K	4K	6K

Material : Aluminium



TRACK



WEIRGT	LENGTH
250 GM	1MTR
510 GM	2MTR

BODY COLOUR



Material : Aluminium



TRACK ACCESSORIES



SHAPE
I SHAPE
L SHAPE
T SHAPE
X SHAPE

BODY COLOUR



MATERIAL



PC Virgin

NAVY TRACK




THE IDEAL
Light for
YOUR
INTERIORS

WATT	DIMENSION
12W	D64xH115
20W	D80xH135
30W	D90xH155
50W	D90xH180




BEAM ANGLE



Material : Aluminium


bridgelux®





MAGNETIC PROFILE LIGHT

M2010 RECESSED



DIMENSION
L1000X62X50
L2000X62X50
L3000X62X50

BODY COLOUR **MATERIAL**

● BK ALUMINIUM

M 2040 SURFACE




DIMENSION
L1000X62X25
L2000X62X25
L3000X62X25

BODY COLOUR **MATERIAL**

● BK ALUMINIUM

M 20 STRAIGHT CONNECTOR



BODY COLOUR

● BK

DIMENSION

400x18

M20 CORNER



ANGLE	DIMENSION
90°	100x100
90°	100x100


BODY COLOUR

● BK

MATERIAL

ALUMINIUM


M20 HANGING KIT

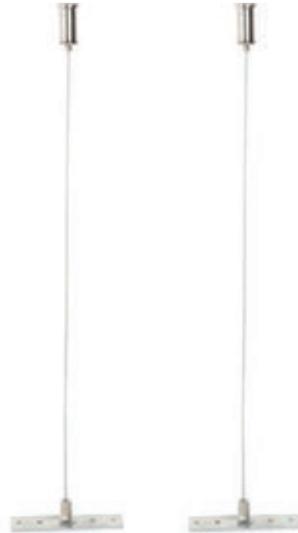

1 Meter

Set of 1 (2pcs.)

M20 CORNER CONNECT MODULE



M20 POWER SUPPLY




POWER SUPPLY	AC INPUT DC OUTPUT
48V DC 100W 2.1A	AC170-240V/48V 100W
48V DC 200W 4A	AC170-240V/48V 200W

IP20

PF
>0.97

M20-2030



WATT	DIMENSION
10W	L300X22XH25
15W	L450X22XH25
20W	L600X22XH25

CCT

Material : Aluminium

BODY COLOUR

● BK

OSRAM

BEAM ANGLE


120°

CRI 90

IP20



M20-3020



WATT	DIMENSION
6W	L112X22XH25
12W	L220X22XH25

CCT

Material : Aluminium

BODY COLOUR

● BK

OSRAM

BEAM ANGLE



24°

CRI 90


IP20



M20-5206

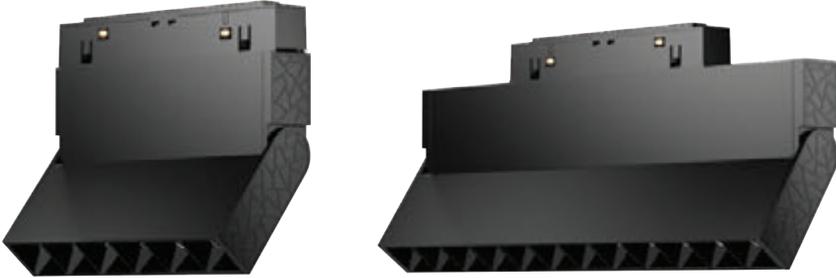

WATT	DIMENSION
6W	L112XW22XH100
12W	L270XW22XH100



Material : Aluminium

BODY COLOUR



BEAM ANGLE



OSRAM



WORK WITH TUNABLE



APP CONTROL




2.4 GHz

M20 S1010



WATT	DIMENSION
10W	D50XH70
20W	D60XH80



Material : Aluminium

BODY COLOUR



BEAM ANGLE



OSRAM




WORK WITH TUNABLE



APP CONTROL



2.4 GHz





THE FOCUS



M2015B



WATT
15W

CCT

3K

BODY COLOUR

BK

Material : Aluminium


CRI
90

IP20




-  Anti Glare
-  Flicker free
-  High lumen
-  High CRI
-  Low UGR

NLH-M05 RECESSED




DIMENSION : L1000X55XH5 | L2000X55XH5 | L3000X55XH5
Material : Aluminium

NLH-M05 SURFACE



DIMENSION : L1000X25XH5 | L2000X25XH5 | L3000X25XH5
Material : Aluminium

NLH-M05



MODEL	WATT	DIMENSION
NLH-M05-906	6W	L110X25XH79
NLH-M05-912	12W	L220X25XH79

CCT



BODY COLOUR





BEAM ANGLE



OSRAM

NLH-M05

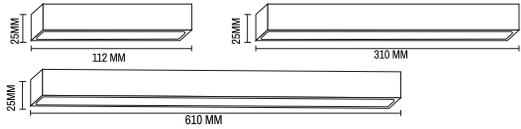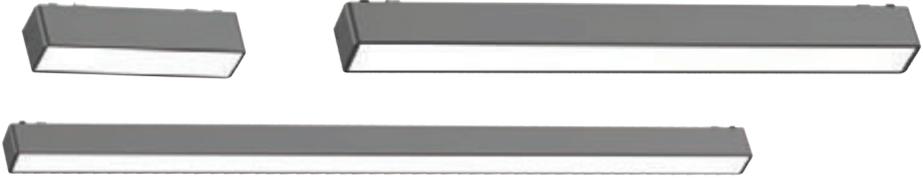

MODEL	WATT	DIMENSION
NLH-M05 605	5W	L112X25XH25
NLH-M05 610	10W	L310X25XH25
NLH-M05 620	20W	L610X25XH25

CCT



BODY COLOUR




BEAM ANGLE



Material : Aluminium

OSRAM

NLH-M05

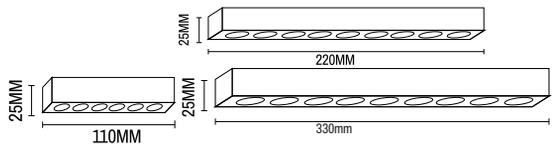

MODEL	WATT	DIMENSION
NLH-M05 506	6W	L110X25XH25
NLH-M05 512	12W	L220X25XH25
NLH-M05 518	18W	L330X25XH25

CCT



BODY COLOUR




BEAM ANGLE



Material : Aluminium

NLH-M05



MODEL	WATT	DIMENSION
NLH-M05 806	6W	L112X79XH25
NLH-M05 812	12W	L220X79XH25

CCT



3K 4K

Material : Aluminium

BODY COLOUR



BK

OSRAM

BEAM ANGLE




24°

CRI
90

IP20

NLH-M05



MODEL	WATT	DIMENSION
NLH-M05 709	9W	D44XH112
NLH-M05 718	18W	D54XH136

CCT



3K 4K

Material : Aluminium

BODY COLOUR



BK

OSRAM

BEAM ANGLE



36°

CRI
90

IP20

NLH-M05 POWER SUPPLY



POWER SUPPLY	AC INPUT DC OUTPUT
48V DC 100W 2.1A	AC170-240V/48V 100W
48V DC 200W 4A	AC170-240V/48V 200W

IP20

PF
>0.97

NLH-M05 CORNER MODULE RECESSED

NLH-M05 WIRE CAP



DIMENSION : 280X61X15

Material : Aluminium

NLH-M05 STRAIGHT MODULE RECESSED



DIMENSION :157X61X15

Material : Aluminium

NLH-M05 L90 MODULE SURFACE



DIMENSION : 36X36X6

NLH-M05 I JOINTER SURFACE




DIMENSION :46X6



STRIP LIGHT & DRIVER

4040 3CHIP

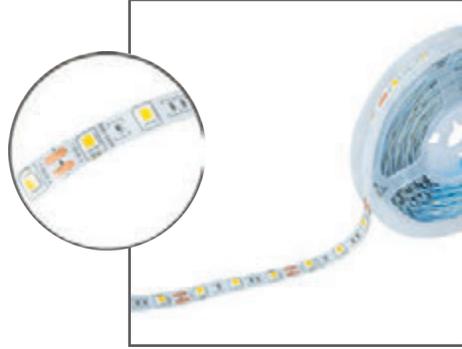

CCT

LED	SIZE	INPUT	POWER
60	8	12V	6W

3K	4K	PINK	RED	GREEN	BLUE
					


CRI 80

IP20

Lumens / LED 20-22



2835 ECCO

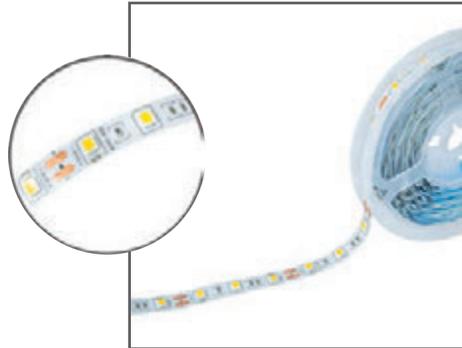

CCT

LED	SIZE	INPUT	POWER
240	10	12V	15W

3K	4K	6K
		

CRI 70



IP20

PCB 1.5 OZ

Lumens / LED 18-20



2835 PREMIUM

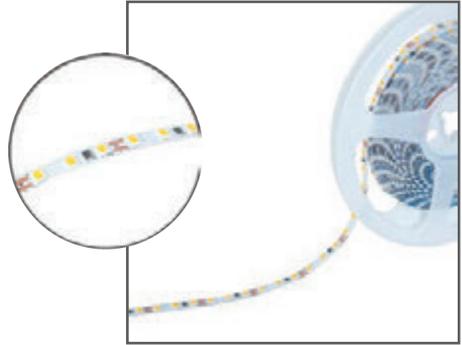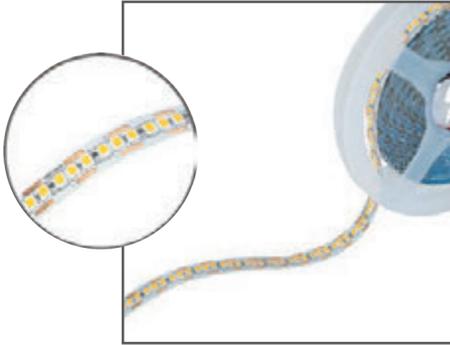

LED	SIZE	INPUT	POWER
120	5	12V	9.6W
120	8	12V	9.6W
180	5	12V	12.8W
180	10	12V	12.8W
240	10	12V	18W
240	10	24V	18W

CCT



PCB
2 OZ


bridgelux®

CRI
85

IP20

Lumens / LED
24-26

2835 PRO

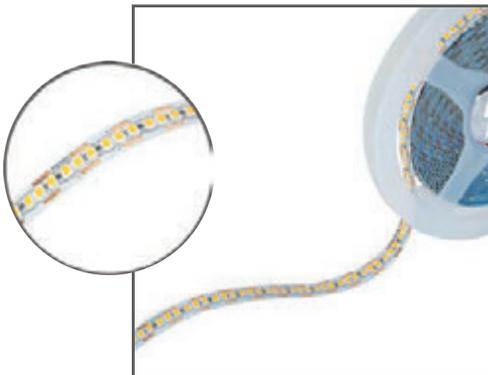

LED	SIZE	INPUT	POWER
120	5mm	24V	9.6W
240	10mm	12V	22W
240	10mm	24V	22W
240	10mm	48V	22W

CCT



LED	SIZE	INPUT	POWER
216	10	24V	20W



CRI
90


IP20

PCB
3 OZ

Lumens / LED
26-28

bridgelux®

3535/144

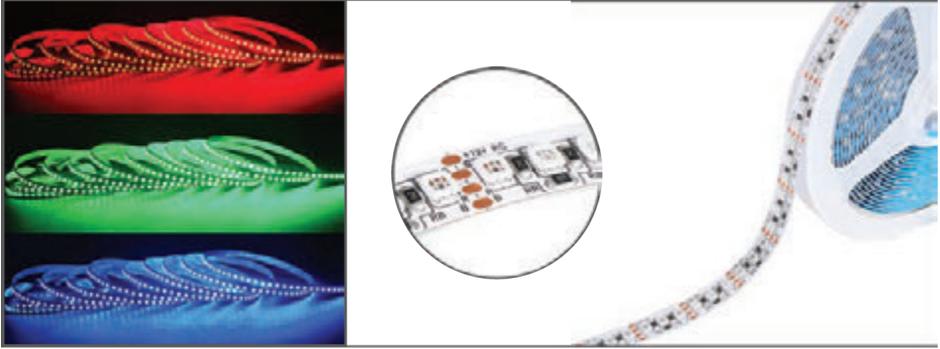

LED	SIZE	INPUT	POWER
3535/144	10	12V	20W



CRI	IP20
85	


5050/60



LED	SIZE	INPUT	POWER
5050/60	10	12V	12W

CRI	IP20
85	

RUNNING IC STRIP

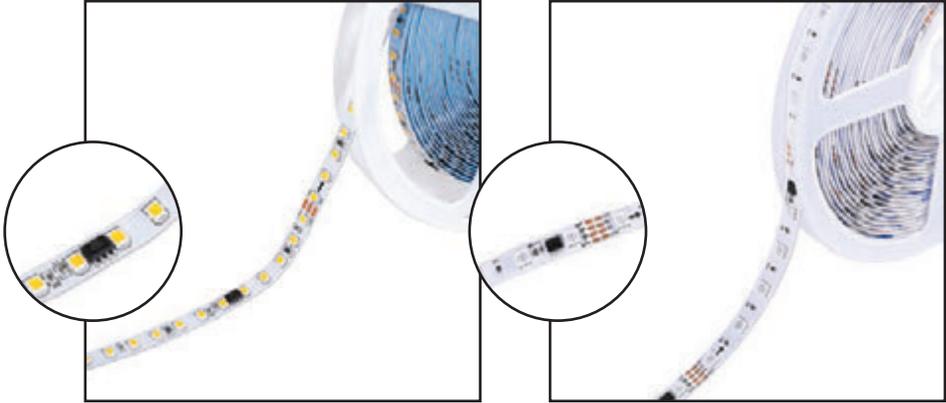

LED	SIZE	INPUT	POWER
2835/120	8MM	24V	9.6W
2835/120	10MM	24V	9.6W
5050/60	10MM	24V	8W

CCT

3K 4K

Tunable

RGB

bridgelux.

CRI
90

IP20

PCB
3 OZ

Lumens / LED
26-26

CURTAIN GRAZER

2835/60 LANCE

LED	SIZE	INPUT	WATT
60	12MM	24V	24W


CCT BEAM ANGLE

3K



CRI
93

IP
20

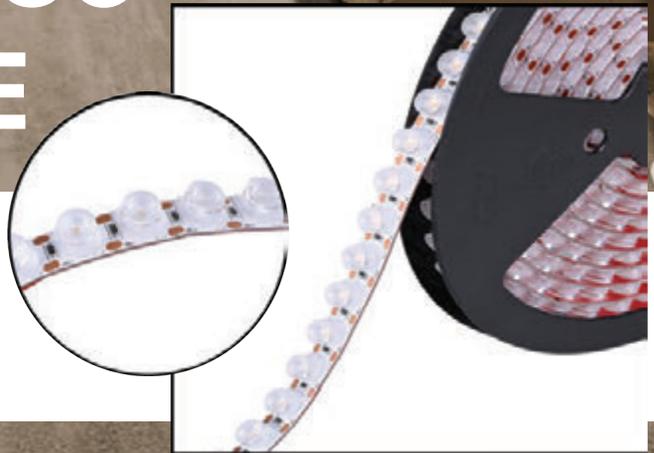

SPARK PENCIL



POWER	DIMENSION	AMP
24V	162X18X18	2
60W	290X18X18	5
120W	340X22X22	10

AC INPUT DC INPUT

175 265V	12V	IP20	PF >0.90	PE 95%
-------------	-----	------	-------------	-----------

SPARK



POWER	DIMENSION	AMP
24W	80X23X35	2
60W	115X23X50	5
120W	140X23X50	10
150W	180X23X50	12.5
200W	180X23X50	16.7
240W	205X23X50	20
300W	205X23X50	25
400W	240X23X50	33.3

AC INPUT DC INPUT

175 265V	12V	IP54	PF >0.97	PE 95%
-------------	-----	------	-------------	-----------

IGNITE PENCIL



POWER	DIMENSION	AMP
60W	290X18X18	2,5
120W	340X22X22	5

AC INPUT DC INPUT

175 265V	24V	IP20	PF >0.90	PE 95%
-------------	-----	------	-------------	-----------

IGNITE



POWER	DIMENSION	AMP
60W	115X23X50	2,5
120W	140X23X50	5
240W	205X23X50	10
400W	240X23X50	16,7

AC INPUT DC INPUT

175 265V	24V	IP54	PF >0.97	PE 95%
-------------	-----	------	-------------	-----------

EPOXY



POWER	DIMENSION	AMP
24W	62X25X38	2
36W	68X25X38	3
60W	68X25X38	5
84W	90X25X50	7
120W	90X25X50	10
180W	103X38X63	15

AC INPUT DC INPUT

175 -
265V

12V

IP66

PF
>0.75

PE
65%

PILOT

POWER	DIMENSION	AMP
60W	166X35X23	5
150W	138X50X23	12.5
200W	178X50X23	16.5
300W	205X50X23	25

AC INPUT DC INPUT

175 -
265V

12V

IP20

PF
>0.85

PE
85%



FLASH

POWER	DIMENSION	AMP
60W	148X50X22	1.25
100W	148X50X22	2.08
150W	191X60X29	3.12
200W	191X60X29	4.2
300W	220X60X29	6.25
400W	220X60X29	8.5



AC INPUT DC INPUT

175 -
265V

48V

IP54

PF
>0.97

PE
95%



ROPE LIGHT

3014



CCT

LED	SIZE	ACINPUT	POWER
120	5	220V	8W

3K	6K	PINK	RED	GREEN	BLUE
					

CRI
80

IP54

5730



CCT

LED	SIZE	ACINPUT	POWER
120	8	220V	10W

3K	6K	PINK	RED	GREEN	BLUE
					

CRI
80

IP54

2835 FROSTED



CCT


LED	SIZE	ACINPUT	POWER
120	8	220V	14W

							
3K	4K	6K	PINK	AMBER	ICE BLUE	GREEN	BLUE

CRI
80

IP54

2835 ROPE

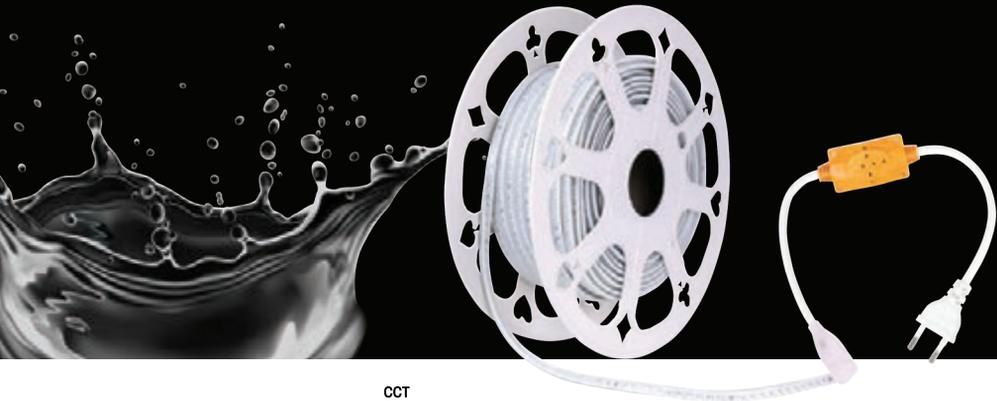

CCT

LED	SIZE	ACINPUT	POWER
120	6	220V	12W

						
3K	4K	6K	BLUE	PINK	AMBER	ICE BLUE

CRI
80

IP54

2835 FLEXO



LED	SIZE	ACINPUT	POWER
120	8X16	220V	12W



CRI
80

IP54

SKY LINE



Size : 10 MTR ROLL

**NO LED STRIP,
NO DRIVER**

Material : ALUMINIUM


BODY COLOUR



BK

IP20

SKY TJ002



WATT	DIMENSION	INPUT
7W	D15xH145	24V

CCT **BODY COLOUR**

4K
 BK


BEAM ANGLE

 36°

CRI 80
IP20

Material : ALUMINIUM

SKY TJ003



WATT	DIMENSION	INPUT
2.5	D80xH111	24V

CCT **BODY COLOUR**

3K
 BK

BEAM ANGLE

 180°

CRI 90
IP20

Material : ALUMINIUM



LED BULB

ST-64


WATT	HOLDER	GLASS TYPE
4W	E-27	AMBER/CLEAR
8W	E-27	AMBER/CLEAR
16W	E-27	AMBER/CLEAR
4W	B-22	AMBER/CLEAR
8W	B-22	AMBER/CLEAR



CCT



3K

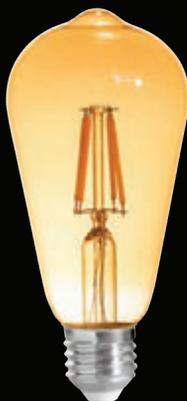

C-35

WATT	HOLDER	GLASS TYPE
4W	E-14/ E-27	AMBER/CLEAR



CCT



3K



G-45



WATT	HOLDER	GLASS TYPE
4W	E-14/ E-27	AMBER/CLEAR

CCT



3K



A-60



WATT	HOLDER	GLASS TYPE
4W	E-27	AMBER/CLEAR


CCT



3K



G-95

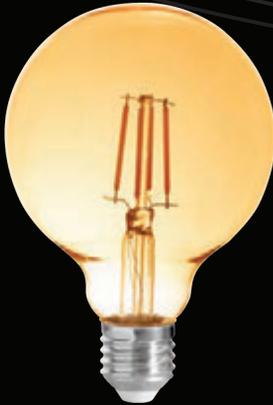

WATT	HOLDER	GLASS TYPE
4W	E-27	AMBER/CLEAR

CCT
 3K
 Dimmable

GU-10



WATT	HOLDER	CHIP TYPE
9,5W	GU-10	SMD LED
7W	GU-10	COB LED

CCT
 3K
 3K  6K

SMD BULB



WATT	HOLDER	GLASS TYPE
6+6W	E-27	CLEAR
8+8W	E-27	CLEAR

6K+3K
WARRANTY-N.A



WATT	HOLDER	GLASS TYPE
8+8W	E-27, E-14	CLEAR

3K
WARRANTY-N.A



WATT	HOLDER	GLASS TYPE
10W	E-27	CLEAR
40W	E-27	CLEAR

3K
WARRANTY-N.A



WATT	HOLDER	GLASS TYPE
5W	G-9	CLEAR
8W	G-9	CLEAR

3K
WARRANTY-N.A



WATT	HOLDER	GLASS TYPE
5W	MR-16	CLEAR


3K
WARRANTY-N.A



WALL PICTURE LIGHT



PEPPY



WATT	DIMENSION
3W	D31XL400


CCT
 3K
BODY COLOUR
 WH  BK

BEAM ANGLE
 38° **CRI** 80 **IP20** **PF** >0.85

Material : ALUMINIUM

bridgelux®

ELASTIC



WATT	DIMENSION
3W	D21XL350


CCT
 3K
BODY COLOUR
 WH  BK

BEAM ANGLE
 38° **CRI** 80 **IP20** **PF** >0.85

Material : ALUMINIUM

bridgelux®

VAST



WATT	DIMENSION
5W	D20XL450

CCT  **3K**

BODY COLOUR  **GOLD**  **BK**


BEAM ANGLE



Material : ALUMINIUM

bridgelux[®]

STANDY

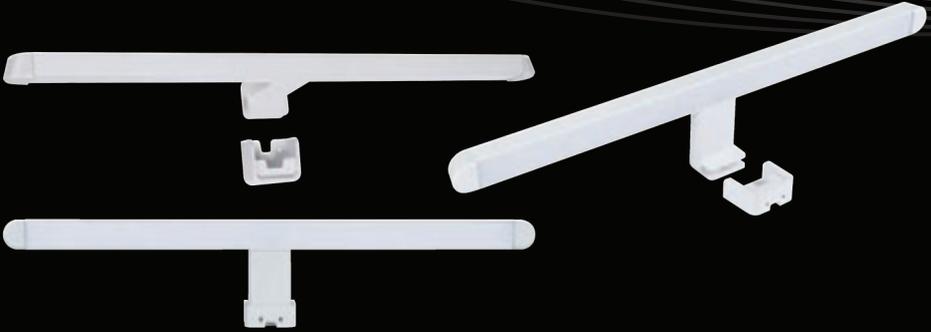

WATT	DIMENSION
9W	336
12W	410
18W	546



3in1

BODY COLOUR




WH

Material : PC VIRGIN

IP20

CRI 80

PF >0.90



CLIX



WATT	DIMENSION
9W	361X76X35
12W	450X76X35
18W	552X76X35



3in1

BODY COLOUR



Silver


Material : Aluminium

BEAM ANGLE

CRI 80

IP20

PF >0.90




NLH-7115



WATT	DIMENSION
12W	560X20MM

CCT  3in1
 BODY COLOUR  GOLD

CRI 70



Material : ALUMINIUM


NLH-7175



WATT	DIMENSION
6W	300X25
12W	500X25

CCT  3in1
 BODY COLOUR  GOLD  WH

CRI 70



Material : ALUMINIUM

NLH-7176





WATT	DIMENSION
6W	300X25
12W	500X25

CCT
 3IN1
 BODY COLOUR
 RG+BK

Material - ALUMINIUM

CRI
70

bridgelux.



NLH-7177




WATT	DIMENSION
16+2W	590X20MM

CCT
 3IN1
 BODY COLOUR
 WOOD

Material - ALUMINIUM

CRI
70

bridgelux.



NLH-7198



WATT	DIMENSION
12W	590X20MM

CCT BODY COLOUR



3IN1




GOLD

CRI
70

Material : ALUMINIUM

bridgelux.



NLH-PL-120



WATT	DIMENSION
20W	380X21

CCT



3IN1

BODY COLOUR



BK



CP




WOODEN WH



Material : ALUMINIUM

bridgelux.



NLH-7199



WATT	DIMENSION
12W	510x90MM

CCT
 3K

BODY COLOUR
 BK
 GUN BK
 ROSE GOLD

bridgelux.
 Material : ALUMINIUM



NLH-7178




WATT	DIMENSION
12W	400x70MM

CCT
 3IN1

BODY COLOUR
 BK
 BRASS

bridgelux.
 Material : ALUMINIUM

NLH-7179




WATT	DIMENSION
9W	300x46MM
12W	400x46MM

CCT	BODY COLOUR	
 3IN1	 BK	 BRASS

bridgelux.
Material : ALUMINIUM

NLH-7180



WATT	DIMENSION
9W	300x46MM
12W	400x46MM

CCT	BODY COLOUR	
 3IN1	 BK	 BRASS

bridgelux.
Material : ALUMINIUM



CONTROLLER

NLH-RMT 001

CCT TOUCH REMOTE

DC INPUT : DC12V,24V
 OUTPUT VOLTAGE : 2X10 AMP
 STRIP CONTROL : CCT
 MOBILE APP : NA
 REMOTE : R.F.
 FEATURE : DIMMING & CCT TUNABLE
 LOAD POWER: 12V-216W
 24V-432W
 CONTROL DISTANCE: 20mtr



NLH-RMT 002

RGB TOUCH REMOTE

DC INPUT : DC12V,24V
 OUTPUT VOLTAGE : 2X10 AMP
 STRIP CONTROL: RGB
 MOBILE APP : NA
 REMOTE : R.F.
 FEATURE : DIMMING & RGB TUNABLE
 LOAD POWER: 12V-216W
 24V-432W
 CONTROL DISTANCE: 20mtr



NLH-CTRL 003

RGB CCT MAGIC HOME CONTROLLER

DC INPUT : DC12V,24V
 OUTPUT VOLTAGE : 5X4 AMP
 STRIP CONTROL : RGB CCT
 MOBILE APP : MAGIC HOME
 REMOTE : R.F.
 FEATURE : DIMMING & RGB TUNABLE
 & RGB3K /RGB WH+WW



NLH-AMPF 004

RGB AMPLIFIER 18 AMP

DC INPUT : DC12V,24V
 OUTPUT VOLTAGE : 3X6 AMP
 STRIP CONTROL : RGB
 MOBILE APP : NA
 REMOTE : NA
 FEATURE : FOR LENGTH EXTENSION



NLH-AMPF 005

RGB CCT AMPLIFIER 50 AMP

DC INPUT : DC12V,24V
 OUTPUT VOLTAGE:- 5X10 AMP
 STRIP CONTROL:- RGB CCT
 MOBILE APP :- NA
 REMOTE :- NA
 FEATURE :- FOR LENGTH EXTENSION



RUNNING IC STRIP CONTROL



NLH-RC 006

RUNNING STRIP CONTROLER - 3K, 4K, 6K (WIRELESS)

WORKING VOLTAGE:-5-24V MAX
CONTROL POINTS:-3200 PIXELS
REMOTE CONTROL DISTANCE:-20 MTR
BATTERY MODEL:-12V BATTERY



NLH-RC 007

RUNNING STREEP RGB CONTROLER WITH APP(WIRELESS)

WORKING VOLTAGE-5-24V MAX
NUMBER OF CONTROL CHIP POINT-< 1000
REMOTE CONTROL DISTANCE-20MTR
RUNNING WATER EFFECTS(BY USING SMART SWITCH)-18 MODE
RUNNING WATER EFFECTS(BY USING APP)-200+ MODE



NLH-RC 008

RUNNING STREEP CCT & RGB CONTROLER WITH APP

PRODUCT-5IN1 LIGHT TRACKING CONTROLER
INPUT VOLTAGE-DC5 -24V DC
OUTPUT VOLTAGE-DC5 -24V
NUMBER OF CONTROL CHIP POINT-< 1000
RUNNING WATER EFFECTS(BY USING SMART SWITCH)-18 MODE
RUNNING WATER EFFECTS(BY USING APP)-200+ MODE





MOTION SENSOR

NLH-MW 001

MICROWAVE MOTION SENSOR THIN

OPERATING VOLTAGE:- AC 220-250V 50HZ-60HZ
LOAD POWER :- UPTO 1200 MX
AMBIENT LIGHT :- 10-2000 LUX (ADJUSTABLE)
DETECTING DISTANCE:-3-12 MTR
INSTALLATION HEIGHT :- 2.2-4MTR
MOTION DETECTING SPEED :-0.6-1M/S
DELAY :-10 SECONDS-15 MINUTES (ADJUSTABLE)



NLH-MW 002

MICROWAVE MOTION SENSOR SQUARE SHAPE SMALL

OPERATING VOLTAGE:- AC 220-250V 50HZ-60HZ
LOAD POWER :- UPTO 1200 MX
AMBIENT LIGHT :- 10-2000 LUX (ADJUSTABLE)
DETECTING DISTANCE:-3-12 MTR
INSTALLATION HEIGHT :- 2.2-4MTR
MOTION DETECTING SPEED :-0.6-1M/S
DELAY :-10 SECONDS-15 MINUTES (ADJUSTABLE)



NLH-MW 003

PIR SENSOR

DETECTION RANGE:-160°
OPERATING VOLTAGE:-220-240 AC
POWER FREQUENCY:-50/60HZ
RATED LOAD :-1200 MAX.
DETECTION DISTANCE:-9M MAX(<24° C)
TIME DELAY:-MIN 10SEC+-3SEC MAX.30MIN+- 20MIN
INSTALLATION HEIGHT:-1-1.8M



NLH-MW 004

PIR MICROWAVE MOTION SENSOR MINI

OPERATING VOLTAGE:- AC 220-250V 50HZ-60HZ
INSTALLATION HEIGHT :- 2.2-4MTR
MOTION DETECTING SPEED :-0.6-1M/S
AMBIENT LIGHT :- 3-2000 LUX (ADJUSTABLE)



NLH-MW 005

PIR FALL/RECESSED CEILING MOUNTED

WORKING HUMIDITY :-LESS THAN 93 % RH
 LOAD POWER :- UPTO 300/1200W MAX
 AMBIENT LIGHT :- 3-2000 LUX (ADJUSTABLE)
 DETECTING DISTANCE :-0-7MTR
 INSTALLATION HEIGHT :- 2.2-4MTR
 MOTION DETECTING SPEED :-0.6-1M/S
 DELAY :-10 SECONDS-15 MINUTES (ADJUSTABLE)



NLH-WR 006

**WARDROBE SENSOR AC SINGLE DOOR
 WARDROBE SENSOR AC DUAL DOOR**

OPERATING VOLTAGE :-220-240V-AC
 LOAD POWER :- MAX.250W
 DETECTING DISTANCE :-5-6 CM



NLH-WR 007

WARDROBE SENSOR DC SINGLE DOOR
WARDROBE SENSOR DC DUAL DOOR

LOAD POWER :- MAX.60W
DETECTING DISTANCE :-5-6 CM

LOAD POWER: MAX 12V 60W
MAX 24V 100W
DETECTING DISTANCE :-5-6 CM



NLH-PHC 008

AUTO DAY/NIGHT ON AND OFF
PHOTOCELL WATERPROOF

OPERATING VOLTAGE :- AC 220-250V 50HZ-60HZ
RATED CURRENT :-6 AMP
AMBIENT LIGHT <5-15 LUX
WORKING TEMP :-20-+40 DEGC
LOAD CURRENT :- 16AMP



NLH-RSS 010

**RUNNING WITH STAIR
CASE SENSOR**

DC INPUT :-DC12V,24V
 OUTPUT VOLTAGE:- DC121/24V
 OUTPUT POWER :- <500W MAX
 PORT :-32(AB) & STRIP PORT-2
 PRODUCT SIZE:- L-185MM-W-78MM
 HEIGHT :-25MM



NLH-SES 011

STAIR CASE SENSOR

DC INPUT :-DC12V,24V
 OUTPUT VOLTAGE:- DC121/24V
 OUTPUT POWER :- <500W MAX
 PORT :-32(AB)



NLH-SCS 012

STAIR CASE SENSOR


AC-220V
 OUTPUT VOLTAGE:-24V
 OUTPUT POWER:- 200W
 PORT:-64 STEPS SUPPORTED
 DIMENSION:-60MMX27MMX223MM

INBUILT DRIVER



STAIR CASE MODULE

NLH MODULE 013

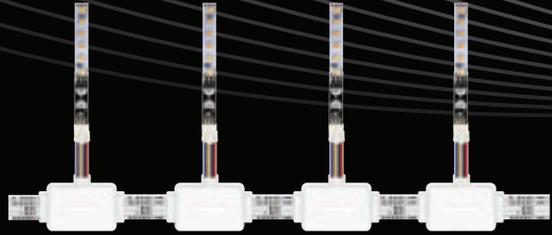

NLH-RSS 014

RUNNING STAIR SENSOR

AC-220V
 OUTPUT VOLTAGE:-24V
 OUTPUT POWER:- 200W
 PORT:-64 STEPS SUPPORTED
 DIMENSION:-60MMX27MMX223MM


INBUILT DRIVER



SIGNAL SENSOR (LED T-5)



MOTION
SENSOR



WATT 20W

SENSOR LED T-5

SENSING MODE- RADAR

FREQUENCY- 5.8G

SENSING DISTANCE- VIERTICAL 6 TO 8 MTR

SENSING ANGLE- 360°

CCT



SENSOR



NLH-PS-S-01

Input Voltage : 100-240V/AC
 Sensing Ambient Brightness : 3-2000lux (Adjustable)
 Delay Time : 10s-15min
 Load Power : 1200W(220V)/600W(110V) ☀️
 600W(220V)/250W(110V) 🌬️🌬️
 Detection angle : 360°
 Installation Height : 2.5m-3.5m
 Power Consumption : 1.2W (work) / 0.5W (static)
 Detection Distance : 8m max



NLH-PS-C-05


Input Voltage : 100-240V/AC 50/60 Hz
 Sensing Ambient Brightness : 3-2000lux (Adjustable)
 Delay Time : 10s±3s-15min±2min
 Load Power :
 1200W(220-240V) / 600W(100-130V) ☀️
 600W(220-240V) / 200W(100-130V) 🌬️🌬️
 Detection angle : 360°
 Installation Height : 2.5m-3.5m
 Power Consumption : 0.45W (work) / 0.1W (static)
 Moving Speed : 0.6-1.5m/s
 Detection Distance : 8m max (<24°C)
 Working Temperature : -10~+40°C
 Working Humidity : <93%RH



CABINET PROFILE LIGHT

NLH-1010

MOTION SENSOR



WATT	DIMENSION
5W	1FEET
8W	2FEET
12W	3FEET

CCT



3K 4K 6K

BODY COLOUR



SILVER

BEAM ANGLE



120°

CRI

80

IP20


PF

>0.75

Material : Aluminium




LINEUP



WATT	DIMENSION
4W	25X300
8W	25X600
12W	25X900
18W	25X1200

CCT



3K 4K 6K

BODY COLOUR



WH BK

BEAM ANGLE



120°

CRI

80

IP20


PF

>0.75

Material : Aluminium



NLH-1011-A



DIMENSION	LENGTH
10X11	CUSTOMIZE (WITH PCB)

CCT



BODY COLOUR



BEAM ANGLE



CRI
85

IP-20

PF
>0.90

DC
12V

Material : ALUMINIUM

NLH-1011-C



DIMENSION	LENGTH
10X11	CUSTOMIZE (WITH PCB)

CCT



BODY COLOUR



BEAM ANGLE



CRI
85


IP-20

PF
>0.90

DC
12V

Material : ALUMINIUM

NLH-1010-D



DIMENSION	LENGTH
10X10	CUSTOMIZE (WITH PCB)

CCT



BODY COLOUR



BEAM ANGLE



CRI
85


IP-20

PF
>0.90

DC
12V

Material : ALUMINIUM

NLH-1010



DIMENSION	LENGTH
25X13	CUSTOMIZE (WITH PCB)

CCT



BODY COLOUR



BEAM ANGLE



CRI
85

IP-20

PF
>0.90

DC
12V

Material : ALUMINIUM

OPERATOR



DIMENSION	WATT	AC INPUT	DC OUTPUT	AMP
L135XW60XH20	36W	175-265V	12V	3
L176XW60XH20	60W	175-265V	12V	5
L210XW60XH20	100W	175-265V	12V	8.33
L240XW60XH20	150W	175-265V	12V	12.5

BALLAST



DIMENSION	WATT	AC INPUT	DC OUTPUT	AMP
L135XW60XH20	36W	175-265V	24V	1.5
L176XW60XH20	60W	175-265V	24V	2.5
L210XW60XH20	100W	175-265V	24V	4.16
L240XW60XH20	150W	175-265V	24V	6.25

WIRELESS SENSOR ANTENA



(SINGLE DOOR ON/ OFF SENSOR)

DIMENSION 46.2X30X14.2MM	REMOTE CONTROL DISTANCE 10-15MM
OPERATING VOLTAGE DC12-24V	POWER SUPPLY BUILT IN 150MA LITHIUM BATTERY
MATERIAL ABS+PC	POWER <15UA
COLOUR BRIGHT WHITE	

SCANNER



(HAND SWEEP SENSOR)

DIMENSION 46.2X30X14.2MM	REMOTE CONTROL DISTANCE 10-15MM
OPERATING VOLTAGE DC12-24V	POWER SUPPLY BUILT IN 150MA LITHIUM BATTERY
MATERIAL ABS+PC	POWER <15UA
COLOUR BRIGHT WHITE	

RADAR



(MOTION SENSOR)

DIMENSION 46.2X30X14.2MM	REMOTE CONTROL DISTANCE 10-15MM
OPERATING VOLTAGE DC12-24V	POWER SUPPLY BUILT IN 150MA LITHIUM BATTERY
MATERIAL ABS+PC	POWER <15UA
COLOUR BRIGHT WHITE	

WIRE SENSOR

STORM

(DOUBLE DOOR SENSOR)



INPUT VOLTAGE :- DC12-24V
 INPUT PORT:- HY/3P MALE
 SENSING METHOD:-DOOR CONTROL SENSING
 HOLE SIZE:-12MM
 PRODUCT SIZE:-15XH18MM
 TERMINAL WIRE LENTH:-2M
 APPLICABLE :-WARDROBES /CABINETS & ETC

GATE

(SINGLE DOOR SENSOR)



INPUT VOLTAGE :- DC12-24V
 INPUT PORT:- HY/3P MALE
 SENSING METHOD:-DOOR CONTROL SENSING
 HOLE SIZE:-12MM
 PRODUCT SIZE:-15XH18MM
 TERMINAL WIRE LENTH:-2M
 APPLICABLE :-WARDROBES /CABINETS & ETC

SHAKE

(HAND SWEEP SENSOR)



INPUT VOLTAGE : DC12-24V
 INPUT PORT: HY/3P MALE
 SENSING METHOD: HAND SCANNING SENSING
 HOLE SIZE: 12MM
 PRODUCT SIZE: 15XH18MM
 TERMINAL WIRE LENTH: 2M
 APPLICABLE : WARDROBES /CABINETS & ETC
 WARDROBES

TAP

(TOUCH SENSOR)



INPUT VOLTAGE :- DC12-24V
 INPUT PORT:- HY/3P MALE
 SENSING METHOD:-TOUCH SENSING
 HOLE SIZE:-12MM
 PRODUCT SIZE:-15XH18MM
 TERMINAL WIRE LENTH:-2M
 APPLICABLE :-WARDROBES /CABINETS & ETC
 WARDROBES

1010-R




DIMENSION	INPUT VOLTAGE
L1000XW13XH9.7	24V

BODY COLOUR



MATERIAL :
ALUMINIUM

1010-S



DIMENSION	INPUT VOLTAGE
L1000XW9.8XH9.7	24V

BODY COLOUR



MATERIAL :
ALUMINIUM

1010-POWER CONNECTOR

DIMENSION
L12XW7.7XH8





1010-BEND CONNECTOR

DIMENSION
L97XW7.7XH8



1010-FG

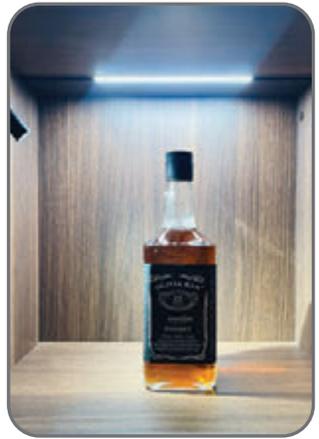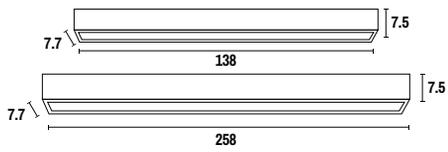


WATT	DIMENSION
2.4W	L138XW7.7XH7.5
3.5W	L258XW7.7XH7.5

CCT **BODY COLOUR** **BEAM ANGLE** **INPUT VOLTAGE**

Material : ALUMINIUM

1010-GS


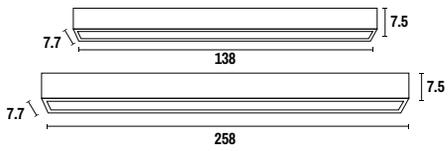


WATT	DIMENSION
1.9W	L138XW7.7XH7.5
3.6W	L258XW7.7XH7.5

CCT **BODY COLOUR** **BEAM ANGLE** **INPUT VOLTAGE**

Material : ALUMINIUM

1010-KTGS

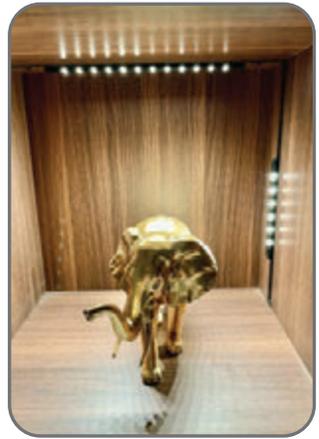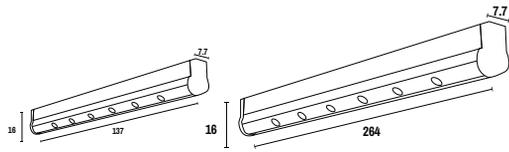


WATT	DIMENSION
2.4W	L137XW7.7XH16
3.5W	L264XW7.7XH16

CCT **BODY COLOUR** **BEAM ANGLE** **IP20** **CRI 90** **INPUT VOLTAGE** **24V**

Material : ALUMINIUM

1010-GD-18




WATT	DIMENSION
1.5W	Φ18X40

CCT **BODY COLOUR** **BEAM ANGLE** **IP20** **CRI 90** **INPUT VOLTAGE** **24V**

Material : ALUMINIUM

1010-GD-15



WATT	DIMENSION
1.5W	Φ15X37.5

CCT



BODY COLOUR



BEAM ANGLE



IP20

CRI
90

INPUT VOLTAGE

24V

Material : ALUMINIUM




PROFILE

ALUMINIUM PROFILE



NLH-C-1708(A+W)



WEIGHT: 0.085kg/mtr
ALU THICKNESS: 0.8mm
PC THICKNESS: 0.5mm

LENGTH : 2 MTR , 3 MTR

BODY : SILVER OXIDE ALUMINIUM+PC WHITE COVER

NLH-C-1708(B+W)




BODY : SAND BLACK ALUMINIUM +PC WHITE COVER

NLH-C-1708(B+B)



BODY : SAND BLACK ALUMINIUM+PC BLACK COVER

NLH-S-1708(A+W)



WEIGHT: 0.07 kg/mtr
ALU THICKNESS: 0.8mm
PC THICKNESS: 0.5mm

LENGTH : 2 MTR , 3 MTR

BODY : SILVER OXIDE ALUMINIUM+PC WHITE COVER

NLH-S-1708(B+W)



BODY : SAND BLACK ALUMINIUM+PC WHITE COVER

NLH-S-1708(B+B)



BODY : SAND BLACK ALUMINIUM+PC BLACK COVER


ALUMINIUM PROFILE



NLH-C-1712(A+W)



WEIGHT: 0.85kg/mtr
ALU THICKNESS: 0.65mm
PC THICKNESS: 0.50mm




LENGTH : 2 MTR

BODY : SILVER OXIDE ALUMINIUM+PC WHITE COVER

NLH-S-1712(A+W)



WEIGHT: 0.75kg/mtr
ALU THICKNESS: 0.65mm
PC THICKNESS: 0.50mm



LENGTH : 2 MTR

BODY : SILVER OXIDE ALUMINIUM+PC WHITE COVER

NLH-C-2508(A+W)




BODY : SILVER OXIDE ALUMINIUM+
PC WHITE COVER

NLH-C-2508(B+W)



BODY : SAND BLACK ALUMINIUM +
PC WHITE COVER



LENGTH : 2 MTR
3 MTR

ALUMINIUM PROFILE



NLH-S-2508(A+W)




**BODY : SILVER OXIDE ALUMINIUM+
PC WHITE COVER**

NLH-S-2508(B+W)



**BODY : SAND BLACK ALUMINIUM+
PC WHITE COVER**

WEIGHT: 0.098 kg/mtr
ALU THICKNESS: 0.8mm
PC THICKNESS: 0.6mm



LENGTH : 2 MTR
3 MTR

NLH-C-0709(A+W)




**BODY : SILVER OXIDE ALUMINIUM+
PC WHITE COVER**

NLH-C-0709(B+W)



**BODY : SAND BLACK ALUMINIUM +
PC WHITE COVER**

WEIGHT: 0.057 kg/mtr
ALU THICKNESS: 0.7mm
PC THICKNESS: 0.5mm



LENGTH : 2 MTR
3 MTR

NLH-S-0709(A+W)




**BODY : SILVER OXIDE ALUMINIUM+
PC WHITE COVER**

NLH-S-0709(B+W)



**BODY : SAND BLACK ALUMINIUM+
PC WHITE COVER**

WEIGHT: 0.046 kg/mtr
ALU THICKNESS: 0.7mm
PC THICKNESS: 0.5mm



LENGTH : 2 MTR
3 MTR

ALUMINIUM PROFILE



NLH-C-1207(A+W)




**BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER**

NLH-C-1207(B+W)



**BODY : SAND BLACK ALUMINIUM+
PC WHITE COVER**

WEIGHT: 0.057kg/mtr
ALU THICKNESS: 0.7mm
PC THICKNESS: 0.5mm




LENGTH : 2 MTR
3 MTR

NLH-S-1207(A+W)




**BODY : SILVER OXIDE ALUMINIUM+
PC WHITE COVER**

NLH-S-1207(B+W)



**BODY : SAND BLACK ALUMINIUM+PC
WHITE COVER**

WEIGHT: 0.049 kg/mtr
ALU THICKNESS: 0.7mm
PC THICKNESS: 0.5mm



LENGTH : 2 MTR
3 MTR

NLH-C-1012(A+W)




**BODY : SILVER OXIDE ALUMINIUM+
PC WHITE COVER**

NLH-C-1012(B+W)



**BODY : SAND BLACK ALUMINIUM
+PC WHITE COVER**

WEIGHT: 0.085 kg/mtr
ALU THICKNESS: 0.7mm
PC THICKNESS: 0.5mm



LENGTH : 2 MTR
3 MTR

ALUMINIUM PROFILE



NLH-S-1012(A+W)




BODY : SILVER OXIDE ALUMINIUM+
PC WHITE COVER

NLH-S-1012(B+W)



BODY : SAND BLACK ALUMINIUM+
PC WHITE COVER

WEIGHT: 0.077 kg/mtr
ALU THICKNESS: 0.7mm
PC THICKNESS: 0.5mm



LENGTH : 2 MTR
3 MTR

NLH-CR-1616(A+W)




BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER

NLH-CR-1616(B+W)



BODY : SAND BLACK ALUMINIUM+PC
WHITE COVER

WEIGHT: 0.064 kg/mtr
ALU THICKNESS: 0.7mm
PC THICKNESS: 0.5mm




LENGTH : 2 MTR
3 MTR

NLH-C-2512(A+W)



BODY : SILVER OXIDE ALUMINIUM+PC WHITE COVER

WEIGHT: kg/mtr
ALU THICKNESS: 0.7mm
PC THICKNESS: 0.5mm



LENGTH : 2.5 MTR


ALUMINIUM PROFILE



NLH-S-2512(A+W)



WEIGHT: 0.147kg/mtr
ALU THICKNESS: 0.79mm
PC THICKNESS: 0.95mm



BODY : SILVER OXIDE ALUMINIUM+PC WHITE COVER

LENGTH : 2.5 MTR

NLH-C-3010(A+W)




BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER

NLH-C-3010(B+W)



BODY : SAND BLACK ALUMINIUM
+PC WHITE COVER

WEIGHT: 0.138kg/mtr
ALU THICKNESS: 0.85mm
PC THICKNESS: 0.68mm



LENGTH : 2.5 MTR

NLH-S-3010(A+W)




BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER

NLH-S-3010(B+W)



BODY : SAND BLACK ALUMINIUM
+PC WHITE COVER

WEIGHT: 0.116kg/mtr
ALU THICKNESS: 0.85mm
PC THICKNESS: 0.68mm



LENGTH : 2.5 MTR

ALUMINIUM PROFILE



NLH-C-3512(A+W)




**BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER**

NLH-C-3512(B+W)



**BODY : SAND BLACK ALUMINIUM
+PC WHITE COVER**

WEIGHT: 0.198 kg/mtr
ALU THICKNESS: 1mm
PC THICKNESS: 1mm



LENGTH : 2.5 MTR

NLH-S-3512(A+W)




**BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER**

NLH-S-3512(B+W)



**BODY : SAND BLACK ALUMINIUM
+PC WHITE COVER**

WEIGHT: 0.183 kg/mtr
ALU THICKNESS: 1mm
PC THICKNESS: 1mm



LENGTH : 2.5 MTR

NLH-C-5012(A+W)




**BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER**

NLH-C-5012(B+W)



**BODY : SAND BLACK ALUMINIUM
+PC WHITE COVER**

WEIGHT: 0.24 kg/mtr
ALU THICKNESS: 1mm
PC THICKNESS: 1.2mm



LENGTH : 2.5 MTR

ALUMINIUM PROFILE



NLH-S-5012(A+W)




**BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER**

NLH-S-5012(B+W)



**BODY : SAND BLACK ALUMINIUM
+PC WHITE COVER**

WEIGHT: 0.213 kg/mtr
ALU THICKNESS: 1mm
PC THICKNESS: 1.2mm




LENGTH : 2.5 MTR

NLH-C-2525(A+W)



**BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER**

WEIGHT: 0.211 kg/mtr
ALU THICKNESS: 1mm
PC THICKNESS: 1mm




LENGTH : 2.5 MTR

NLH-S-2525(A+W)



**BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER**

WEIGHT: 0.200 kg/mtr
ALU THICKNESS: 1mm
PC THICKNESS: 1mm



LENGTH : 2.5 MTR

ALUMINIUM PROFILE



NLH-C-3535(A+W)




**BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER**

NLH-C-3535(B+W)



**BODY : SAND BLACK ALUMINIUM
+PC WHITE COVER**

WEIGHT: 0.486 kg/mtr
ALU THICKNESS: 1.1mm
PC THICKNESS: 1mm



LENGTH : 2.5 MTR
3.7 MTR

NLH-S-3535(A+W)




**BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER**

NLH-S-3535(B+W)



**BODY : SAND BLACK ALUMINIUM
+PC WHITE COVER**

WEIGHT: 0.45 kg/mtr
ALU THICKNESS: 1.1mm
PC THICKNESS: 1mm



LENGTH : 2.5 MTR
3.7 MTR

NLH-C-5035(A+W)




**BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER**

NLH-C-5035(B+W)



**BODY : SAND BLACK ALUMINIUM
+PC WHITE COVER**

WEIGHT: 0.534 kg/mtr
ALU THICKNESS: 1.1mm
PC THICKNESS: 1.2mm



LENGTH : 2.5 MTR
3.7 MTR

ALUMINIUM PROFILE



NLH-S-5035(A+W)




**BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER**

NLH-S-5035(B+W)



**BODY : SAND BLACK ALUMINIUM
+PC WHITE COVER**

**WEIGHT: 0.498 kg/mtr
ALU THICKNESS: 1.1mm
PC THICKNESS: 1.2mm**




**LENGTH : 2.5 MTR
3.7 MTR**

NLH-C-7535(A+W)



BODY : SILVER OXIDE ALUMINIUM +PC WHITE COVER

**WEIGHT: 0.641 kg/mtr
ALU THICKNESS: 1.2mm
PC THICKNESS: 1.2mm**




LENGTH : 3.7 MTR

NLH-S-7535(A+W)



BODY : SILVER OXIDE ALUMINIUM +PC WHITE COVER

**WEIGHT: 0.606 kg/mtr
ALU THICKNESS: 1.2mm
PC THICKNESS: 1.2mm**



LENGTH : 3.7 MTR

ALUMINIUM PROFILE



NLH-S-5070(A+W)




**BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER**

NLH-S-5070(B+W)



**BODY : SAND BLACK ALUMINIUM
+PC WHITE COVER**

WEIGHT: 0.948 kg/mtr
ALU THICKNESS: 1.1mm
PC THICKNESS: 1.2mm



LENGTH : 2.4 MTR

NLH-CB-2409(A+W)




**BODY : SILVER OXIDE ALUMINIUM
+PC WHITE COVER**

NLH-CB-2409(B+W)



**BODY : SAND BLACK ALUMINIUM
+PC WHITE COVER**

WEIGHT: 0.133 kg/mtr
ALU THICKNESS: 0.75mm
PC THICKNESS: 0.50mm




LENGTH : 3.MTR

ALUMINIUM PROFILE

NLH-FP-2112




WEIGHT: 0.223 kg/mtr
ALU THICKNESS: 1.45mm
PC THICKNESS: 2.70mm




LENGTH : 3 MTR



NLH-CR-7009

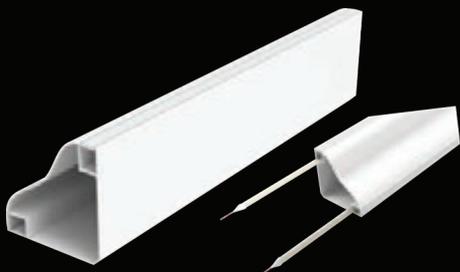

WEIGHT: 0.633 kg/mtr
ALU THICKNESS: 1.08mm
PC THICKNESS: 0.80mm



LENGTH : 3MTR




ALUMINIUM PROFILE

NLH-CB-3020



WEIGHT: 0.183 kg/mtr
ALU THICKNESS: 0.95mm
PC THICKNESS: 0.86mm
LENGTH : 3 MTR




NLH-SKT-6513

SKIRTING LIGHT




WEIGHT: 0.325 kg/mtr
ALU THICKNESS: 1.08mm
PC THICKNESS: 0.64mm



LENGTH : 3 MTR




NLH-S-1619 (A+W)




LENTH 3 MTR
DIMENSION 16X19MM

BODDY: SILVER OXIDE ALUMINIUM+PC WHITE COVER

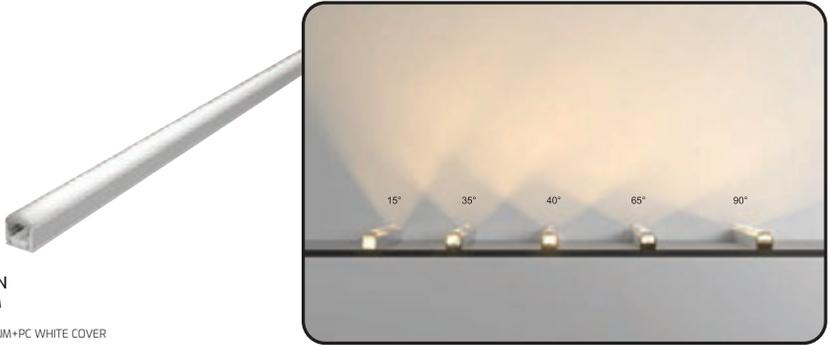

NLH-C-1210(A+W)



LENTH 3 MTR
DIMENSION 12X10MM



BODDY: SILVER OXIDE ALUMINIUM+PC WHITE COVER



NLH-C-1310(A+W)

LENTH 3 MTR
DIMENSION 13X10MM

BODDY: SILVER OXIDE ALUMINIUM+PC WHITE COVER

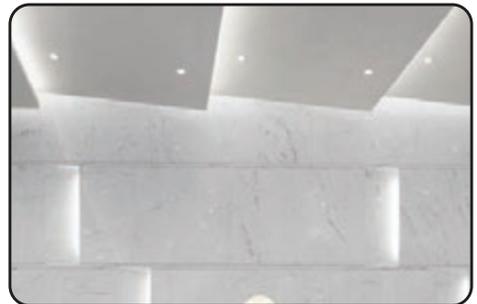

NLH-C-1310(B+W)

LENTH 3 MTR
DIMENSION 13X10MM

BODDY: SAND BLACK ALUMINIUM +PC WHITE COVER




NLH-C-2010(A+W)



LENTH 3 MTR
DIMENSION 20X10MM

BODDY: SILVER OXIDE ALUMINIUM+PC WHITE COVER





NLH-C-2010(B+W)

LENTH 3 MTR
DIMENSION 20X10MM

BODDY: SAND BLACK ALUMINIUM +PC WHITE COVER





NLH-S-5075(A+W)

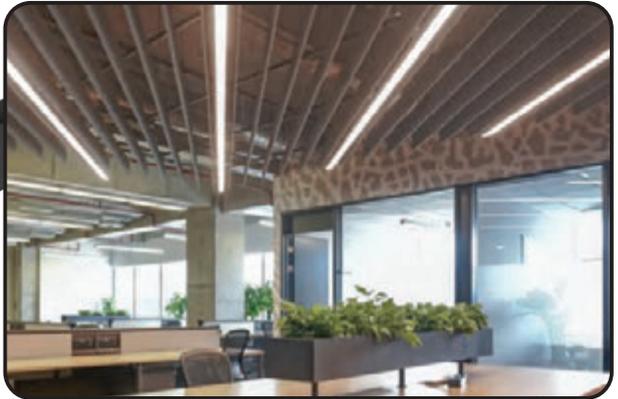

LENTH 4.8MTR
DIMENSION 50X75MM

BODDY:SAND BLACK ALUMINIUM +PC WHITE COVER

NLH-C-6545(A+W)

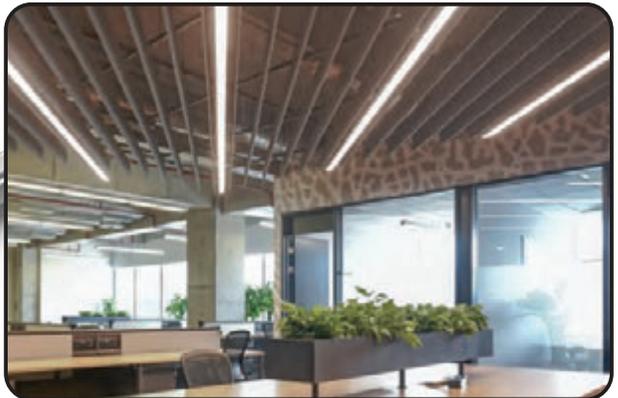

LENTH 3.6MTR
DIMENSION 65X45MM


BODDY: SILVER OXIDE ALUMINIUM+PC WHITE COVER

NLH-S-7525(A+W)



LENTH 3 MTR
DIMENSION 75X25MM

BODDY: SILVER OXIDE ALUMINIUM+PC WHITE COVER




NLH-S-7525(B+W)



LENTH 3 MTR
DIMENSION 75X25MM

BODDY: SAND BLACK ALUMINIUM +PC WHITE COVER


NLH-S-1010(G+W)



LENTH 3 MTR
DIMENSION 25X13MM

BODDY: SAND GREY ALUMINIUM+PC WHITE COVER


NLH-S-1805(A+W)



LENTH 2 MTR
DIMENSION 18X05MM
3 MTR 18X05MM

BODDY: SILVER OXIDE ALUMINIUM+PC WHITE COVER


NLH-C-1312(A+W)



LENTH 3 MTR
DIMENSION 13X12MM

BODDY: SILVER OXIDE ALUMINIUM+PC WHITE COVER

NLH-S-1312(A+W)



LENTH 3 MTR
DIMENSION 13X12MM

BODDY: SILVER OXIDE ALUMINIUM+PC WHITE COVER



NLH-C-1011(A+W)



LENTH 3 MTR
DIMENSION 10X11MM

BODDY: SILVER OXIDE ALUMINIUM+PC WHITE COVER

NLH-C-1513(A+W)



LENTH 3 MTR
DIMENSION 15X13MM

BODDY: SILVER OXIDE ALUMINIUM+PC WHITE COVER

NLH-C-2814(A+W)




LENTH 3 MTR
DIMENSION 28X14MM

BODDY: SILVER OXIDE ALUMINIUM+PC WHITE COVER




NLH-C-2011 (A+W)



LENTH 3 MTR
DIMENSION 20X10MM
 WEIGHT: 0.148 kg/mtr
 ALU THICKNESS: 0.85mm
 PC THICKNESS: 0.5mm

BODDY: SILVER OXIDE ALUMINIUM+PC WHITE COVER


NLH-C-2011 (B+W)



LENTH 3 MTR
DIMENSION 20X10MM
 WEIGHT: 0.148 kg/mtr
 ALU THICKNESS: 0.85mm
 PC THICKNESS: 0.5mm

BODDY: SAND BLACK ALUMINIUM+PC WHITE COVER

NLH-S-9658 (W+W)



LENTH 3 MTR
DIMENSION 96X58MM
 WEIGHT: 0.7 kg/mtr
 ALU THICKNESS: 1.18mm
 PC THICKNESS: 0.5mm

BODDY: SAND WHITE ALUMINIUM+PC WHITE COVER





NLH-S-1611 (A+W)



LENTH 3 MTR
DIMENSION 16X18MM
 WEIGHT: 0.107 kg/mtr
 ALU THICKNESS: 0.8mm
 PC THICKNESS: 0.5mm

BODDY: SAND BLACK ALUMINIUM+PC WHITE COVER

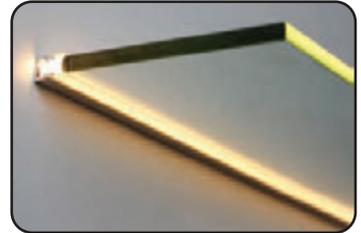


NLH-7598 (B+W)



LENTH 3 MTR
DIMENSION 75X98 MM

BODDY: SAND BLACK ALUMINIUM+PC WHITE COVER




NLH-5185 (A+W)



LENTH DIMENSION
3 MTR 51X85 MM

BODDY: SILVER OXIDE ALUMINIUM+PC WHITE COVER




NLH-3052 (A+W)



LENTH DIMENSION LP ₹ (1MTR)
3 MTR 35X52 MM 5402/-

BODDY: SILVER OXIDE ALUMINIUM+PC WHITE COVER




NLH-9719 (W+W)



LENTH DIMENSION LP ₹ (1MTR)
3 MTR 97X19 MM 3219/-

BODDY: SAND WHITE ALUMINIUM+PC WHITE COVER



3535 SEPARATE DIFFUSER

Suitable Profile

- NLH -C- 3512
- NLH -S- 3512
- NLH -C- 3535
- NLH -S- 3535

LENGTH - 25 MTR ROLL




5050 SEPARATE DIFFUSER

Suitable Profile

- NLH -C- 5012
- NLH -S- 5012
- NLH -C- 5035
- NLH -S- 5035
- NLH -S- 5070

LENGTH - 25 MTR ROLL

NLH-C-2512(B+W)

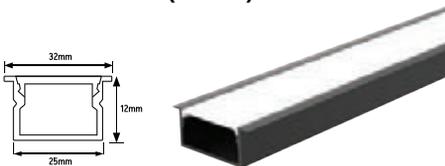

LENTH DIMENSION
2.5MTR 25X12MM


BODDY: SAND BLACK ALUMINIUM+PC WHITE COVER

NLH-S-2512(B+W)



LENTH DIMENSION
2.5MTR 25X12MM

BODDY: SAND BLACK ALUMINIUM+PC WHITE COVER

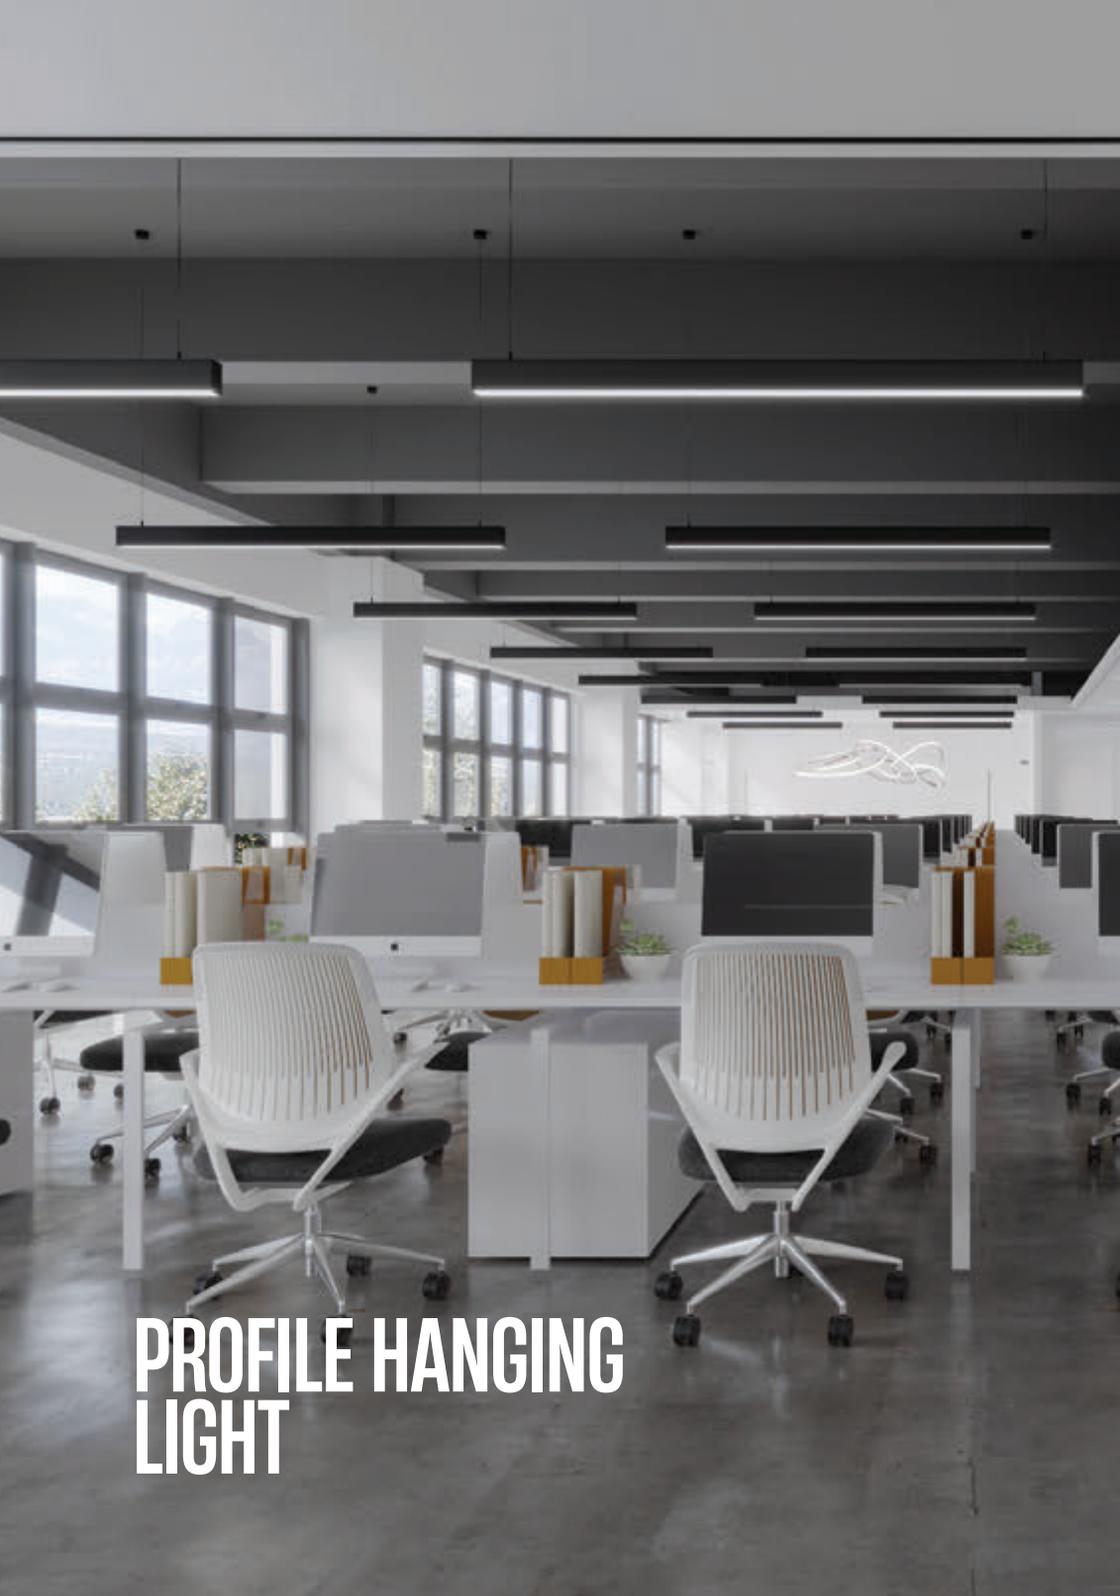

PROFILE HANGING LIGHT

HUNTER-5070



WATT	DIMENSION
24W	600X50X70
36W	900x50x70
48W	1200X50X70
72W	1800x50x70
96W	2400X50X70


CCT



BODY COLOUR



Material : ALUMINIUM

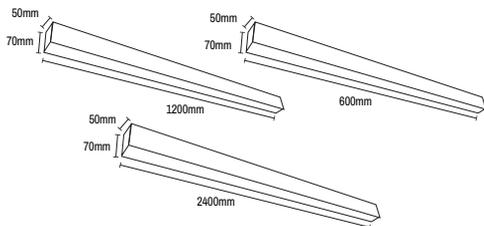

HUNTER-5075



WATT	DIMENSION
48W	1200X50X70


CCT



BODY COLOUR



Material : ALUMINIUM



NLH-001 ROUND DRUM



WATT	DIMENSION
30W	D450XH50
60W	D600XH50

CCT

Switch CCT



3K 4K 6K

BODY COLOUR



CRI 85

IP20

PF >0.90


Material : ALUMINIUM

NLH-002 ROUND RING



WATT	DIMENSION
24W	D300X50X70
40W	D450X50X70
50W	D600X50X70
85W	D900X50X70
120W	D1200X50X70

CCT



3K 4K 6K

BODY COLOUR



CRI 85

IP20

PF >0.90


Material : ALUMINIUM

NLH-004 TRIANGLE RING



WATT	DIMENSION
24W	D300X50X70
36W	D450X50X70
50W	D600X50X70

CCT



BODY COLOUR



CRI
85

IP20

PF
>0.90


Material : ALUMINIUM

NLH-005 HEXA DRUM



WATT	DIMENSION
24W	D300XH65
36W	D450XH65
50W	D600XH65

CCT



BODY COLOUR



CRI
85

IP20

PF
>0.90


Material : ALUMINIUM

NLH-006 HEXA RING



WATT	DIMENSION
24W	D300X50X70
36W	D450X50X70
50W	D600X50X70

CCT



BODY COLOUR



CRI
85

IP20

PF
>0.90


Material : ALUMINIUM

HUNTER DOT 3570



WATT	DIMENSION
48W	D1200X35X70

CCT



BODY COLOUR



CRI
85

IP20

PF
>0.90


Material : ALUMINIUM

Customize size available

HANGING KIT





1 MTR WIRE, 2 MTR WIRE, 3 MTR WIRE

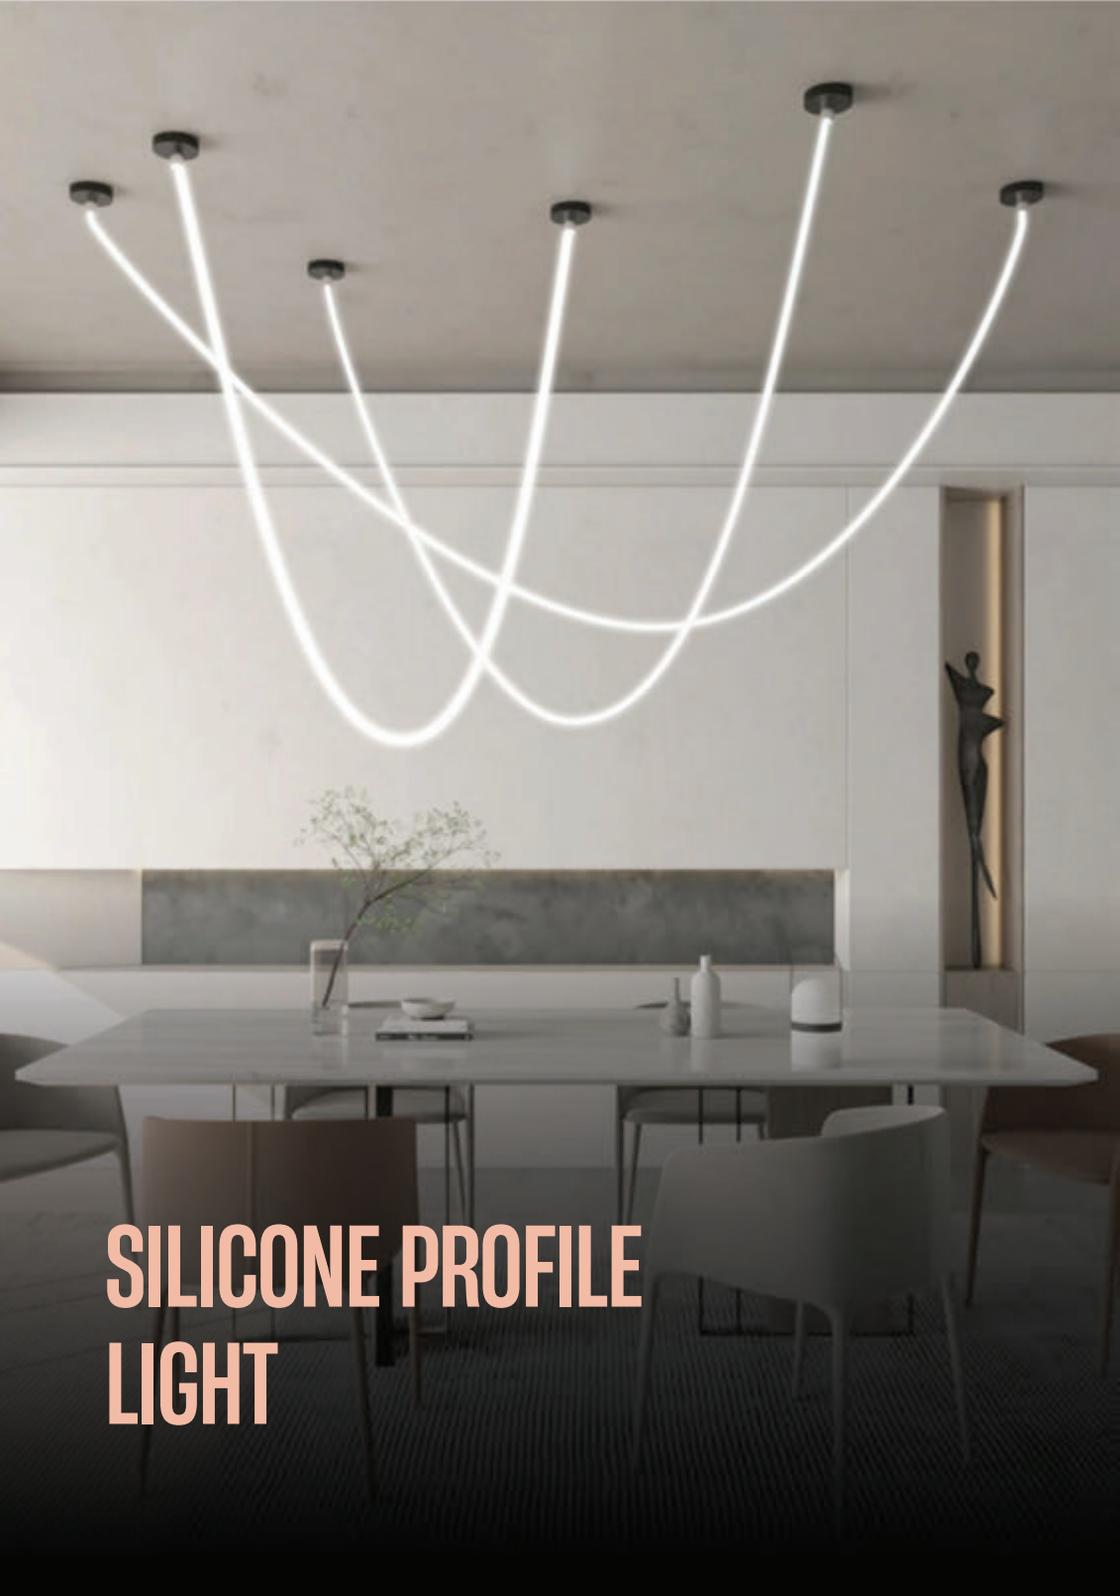

SILICONE PROFILE LIGHT

BENDY LINEAR

TOP VIEW NLH-T_1010

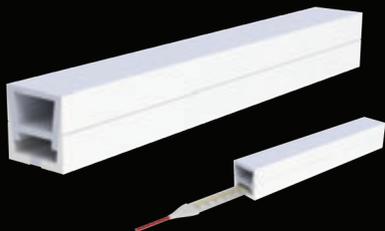

END CAP SET



IP : 66

CLIP





CHANNEL



WIDTH : 6mm

NLH-T-1212

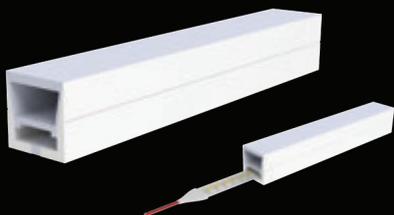

END CAP SET



IP : 66

CLIP





CHANNEL



WIDTH : 8mm

NLH-T-1616

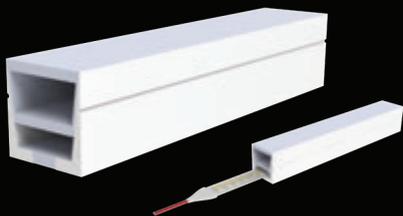

END CAP SET



IP : 66

CLIP



CHANNEL



WIDTH : 10mm


BENDY LINEAR

TOP VIEW NLH-T-2510



END CAP SET


CLIP



IP : 66

WIDTH : 13mm

NLH-T-3020



END CAP SET

CLIP


CHANNEL



IP : 66

WIDTH : 16mm

NLH-T-5020



END CAP SET

CLIP





IP : 66


WIDTH : 2x12mm

BENDY LINEAR



SIDE VIEW NLH-S-0612

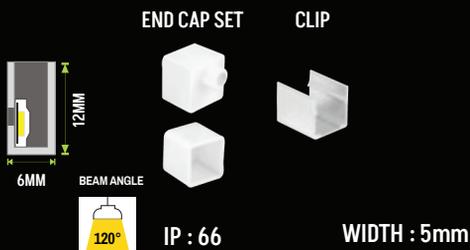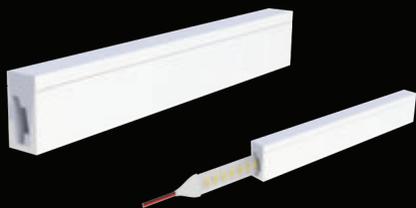

NLH-S-1616

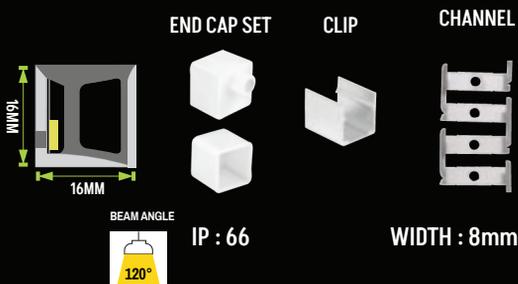


NLH-S_2020

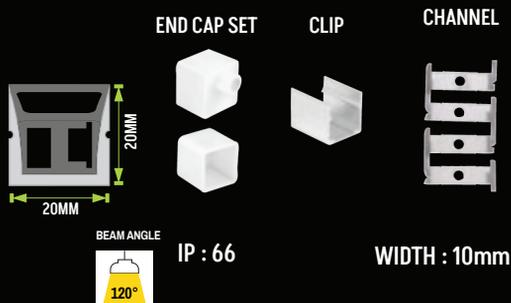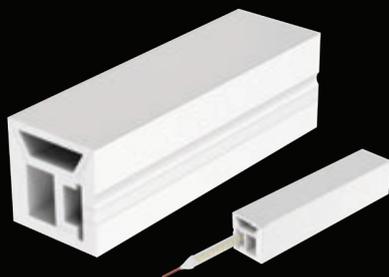

BENDY LINEAR

SIDE VIEW NLH-S-3020



END CAP SET

CLIP

CHANNEL



BEAM ANGLE



IP : 66

WIDTH : 2x12mm

NLH-S-1225



BEAM ANGLE



END CAP SET

CLIP



IP : 66

WIDTH : 12mm

NLH-S-1223



END CAP SET

CLIP



BEAM ANGLE




IP : 66

WIDTH : 8mm


BENDY LINEAR



FURNITURE NLH-F_0606

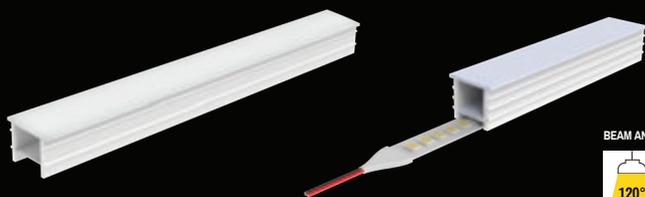

BEAM ANGLE




IP : 66

WIDTH : 4mm

NLH-F-1212




BEAM ANGLE




IP : 66

WIDTH : 8mm

NLH-F-1610

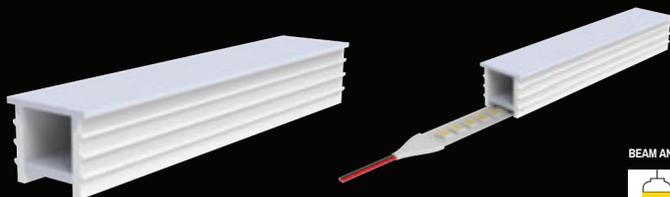


BEAM ANGLE




IP : 66

WIDTH : 13mm

NLH-F-2014

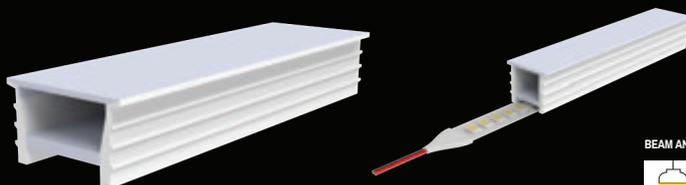

BEAM ANGLE





IP : 66

WIDTH : 12mm

BENDY LINEAR



FURNITURE NLH-F-3020

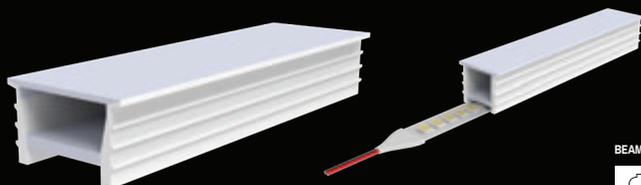

BEAM ANGLE




IP : 66

WIDTH : 20tmm

CONCEALED NLH-TC_1010



CHANNEL




BEAM ANGLE



IP : 66

WIDTH : 7mm

NLH-TC-1210

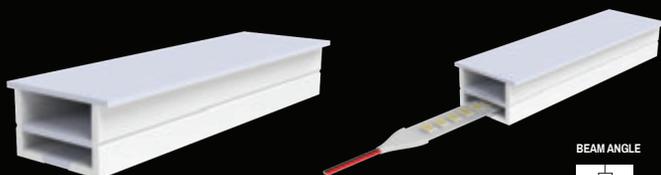


BEAM ANGLE




IP : 66

WIDTH : 8mm



NLH-TC-1616

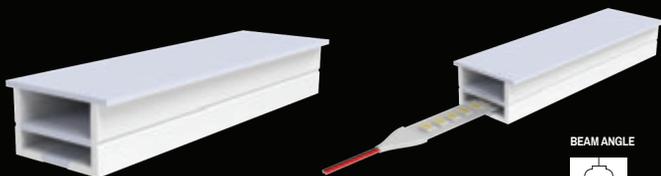


BEAM ANGLE



IP : 66

WIDTH : 10mm





BENDY LINEAR



CONCEALED

NLH-TC-2010

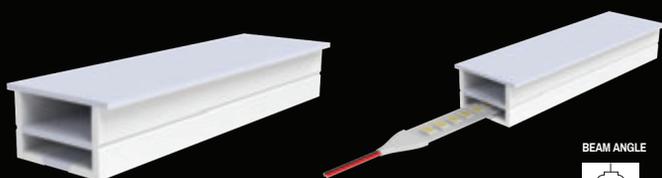


BEAM ANGLE



IP : 66

WIDTH : 17mm

NLH-TC-2014

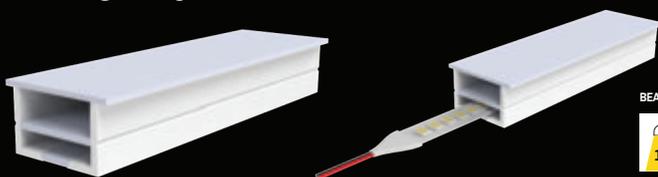


BEAM ANGLE




IP : 66

WIDTH : 12mm



NLH-TC-3020

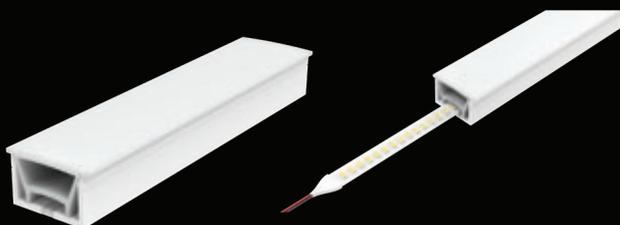

BEAM ANGLE



IP : 66

WIDTH : 16mm



NLH-TR-1313



BEAM ANGLE



END CAP SET



IP : 66

WIDTH : 10mm


BENDY LINEAR



NLH-R-24



24MM



END CAP SET



BEAM ANGLE




IP : 66 WIDTH : 2x10mm

NLH-SLEEVE-8



BEAM ANGLE



END CAP SET



IP : 66 WIDTH : 6mm

NLH-SLEEVE-10



END CAP SET



BEAM ANGLE



WIDTH : 8mm
IP : 66

NLH-SLEEVE-12



END CAP SET



BEAM ANGLE



WIDTH : 10mm
IP : 66

CYBER GLOW-T-1212



CCT

 3K

DIMENSION	POWER	INPUT	LED
16X16	9.6W	24V	2835/120LED

20M ROLL NO VOLTAGE DROPE

IP : 65

ROLL : 20MTR

CYBER GLOW-S-1212



CCT

 3K

DIMENSION	POWER	INPUT	LED
16X16	9.6W	24V	2835/120LED

20M ROLL NO VOLTAGE DROPE


IP : 65

ROLL : 20MTR

CONNECTOR AND JOINTER FOR STRIP

WIRE CONNECTOR FOR STRIP

- WIRE CONNECTOR 10 MM FOR RGB STRIP
- WIRE CONNECTOR 10 MM FOR STRIP
- WIRE CONNECTOR 5 MM FOR STRIP
- WIRE CONNECTOR 8 MM FOR STRIP



IP20

STRAIGHT CONNECTOR FOR STRIP

- STRAIGHT CONNECTOR 10 MM FOR RGB STRIP
- STRAIGHT CONNECTOR 10 MM FOR STRIP
- STRAIGHT CONNECTOR 5 MM FOR STRIP
- STRAIGHT CONNECTOR 8 MM FOR STRIP



IP20

L CONNECTOR FOR STRIP

- L CONNECTOR 10 MM FOR STRIP
- L CONNECTOR 5 MM FOR STRIP
- L CONNECTOR 8 MM FOR STRIP



IP20

CONNECTOR



IP20

WARDROBE SWITCH

Small

BIG



IP20

BODY COLOUR

DIMENSION

OPERATING VOLTAGE

BODY COLOUR

DIMENSION

OPERATING VOLTAGE



33X33XH14

220-240 AC



50*50*H16

220-240 AC

WH BK

WH BK

NLH-SCTR SMART CONTROLLER (STRIP)



LED STRIP LIGHT CONTROLLER
LOAD MAX :12V 200W
24V 400W



DRIVER




4-7W HIGH PF ISOLATED 300MA DRIVER
8-12W HIGH PF ISOLATED 300MA DRIVER
12-18W HIGH PF ISOLATED 300MA DRIVER
24-36W HIGH PF ISOLATED 750MA DRIVER
36-50W HIGH PF ISOLATED 1200MA DRIVER



DALI DRIVER (DT8)

WATT	O/P CURRENT	O/P VOLTAGE
6W TO 12W	150 TO 400	9 TO 45
15W TO 24W	350 TO 700	9 TO 45

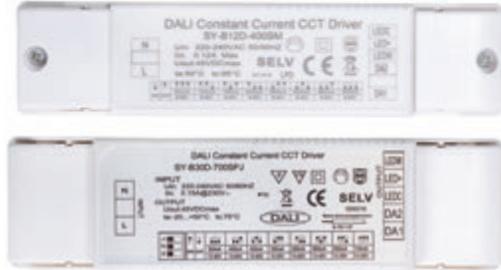

IP20

DALI MAGNETIC CONTROLLER (DT8)




WATT	I/P VOLTAGE	O/P CURRENT	O/P VOLTAGE
6W to 20W	48VDC	150 TO 700	9 TO 45V

IP20



2.4G REMOTE

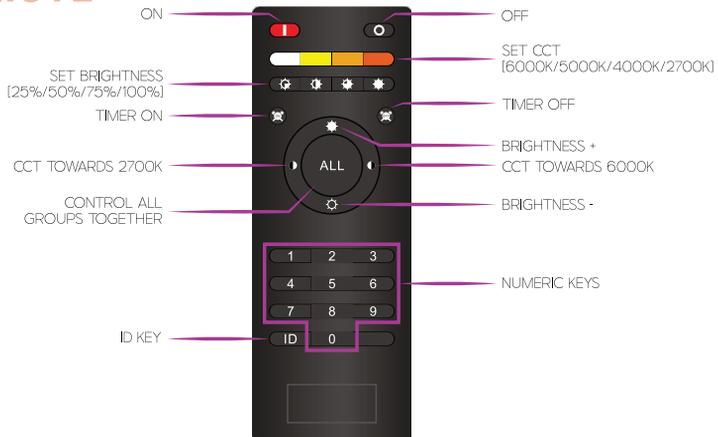



OUT DOOR WALL LIGHT

NLH-2101




WATT	DIMENSION
4W	90X70
8W	150X70

CCT BODY COLOUR BEAM ANGLE



Material : Aluminium

EPISTAR



NLH-2102





WATT	DIMENSION
1X5W	75X63X80
2X5W	142X63X80

CCT BODY COLOUR BEAM ANGLE



Material : Aluminium

bridgelux



NLH-2103



WATT	DIMENSION
2X1W	80X38X78
4X1W	115X38X78
6X1W	168X45X78
8X1W	210X45X78

CCT BODY COLOUR

 3K GREY

BEAM ANGLE




CRI
85

IP65


PF
>0.95

Material : Aluminium

bridgelux.



NLH-2104

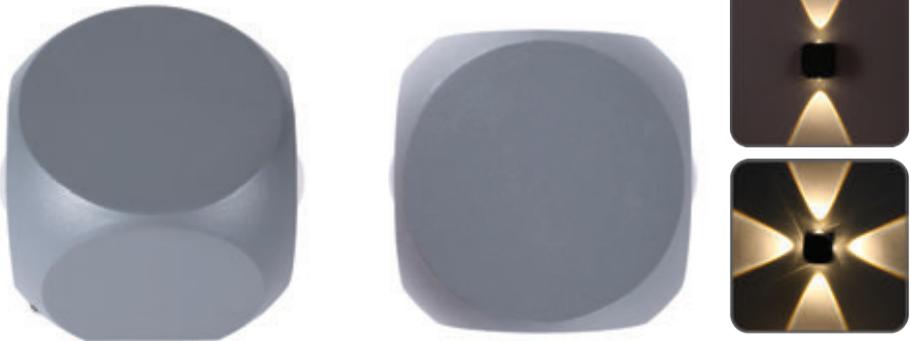

WATT	DIMENSION
2x1W	75X55X75
4X1W	75X55X75

CCT BODY COLOUR

 3K GREY

BEAM ANGLE




CRI
85

IP65

PF
>0.95

Material : Aluminium

bridgelux.



NLH-2105



WATT	DIMENSION
3W	80X60X35
2x3W	80X60X35

CCT **3K**
BODY COLOUR **GREY**

Material : Aluminium


BEAM ANGLE



CRI
85

IP65

PF
>0.95



bridgelux.

NLH-2106



WATT	DIMENSION
1X9W	90X90X126
2X9W	90X110X126

CCT **3K**
BODY COLOUR **GREY**

Material : Aluminium


BEAM ANGLE



CRI
90

IP65

PF
>0.95



bridgelux.

NLH-2107



WATT	DIMENSION
6x3W	120x50

CCT



3K RGB

BODY COLOUR



GREY

Material : Aluminium

BEAM ANGLE




40°

CRI
85

IP65

PF
>0.95



CREE ⇄





NLH-2109



WATT	DIMENSION
3W	53X40
2x3W	65X40



BEAM ANGLE



Material : Aluminium

bridgelux.


NLH-2110



WATT	DIMENSION
2X1W	D70XW60XH40



BEAM ANGLE



Material : Aluminium

bridgelux.


NLH-2111



WATT	DIMENSION
1x1W	D42XW32XH35



BEAM ANGLE



Material : Aluminium

bridgelux.


NLH-2112



WATT	DIMENSION
2X1W	42X32X35



BEAM ANGLE



Material : Aluminium

bridgelux.

NLH-2113



WATT	DIMENSION
3W	75X88X90

CCT
3K

BODY COLOUR
GREY

BEAM ANGLE
60°


CRI
85

IP65

PF
>0.95

Material : Aluminium

CREE ⇄



NLH-2114



WATT	DIMENSION
12W	121X152X465

CCT
3K

BODY COLOUR
GREY

BEAM ANGLE
120°


CRI
85

IP65

PF
>0.95

Material : Aluminium

OSRAM



NLH-2115



WATT	DIMENSION
18W	60X280

CCT
 3K

BODY COLOUR
 GREY


BEAM ANGLE



CRI
85

IP65

PF
>0.95



Material : Aluminium

bridgelux®

NLH-2116



WATT	DIMENSION
18W	80X70XH255

CCT
 3K

BODY COLOUR
 GREY


BEAM ANGLE



CRI
85

IP65

PF
>0.95



Material : Aluminium

OSRAM

NLH-2117



WATT	DIMENSION
10W	250X200XH300

CCT **BODY COLOUR**
■ ●
3K **FLASH GREY**

Material : Aluminium


BEAM ANGLE



CRI 90

IP65

PF >0.95



bridgelux.

NLH-2118



WATT	DIMENSION
10W	285X200

CCT **BODY COLOUR**
■ ●
3K **FLASH GREY**

Material : Aluminium


BEAM ANGLE



CRI 90

IP65

PF >0.95



bridgelux.

NLH-2119



WATT	DIMENSION
5W	54X56X66

CCT **3K** BODY COLOUR **GREY**

BEAM ANGLE




CRI 85

IP65

PF >0.95

Material : Aluminium



NLH-2120



WATT	DIMENSION
2X5W	54X56X100

CCT **3K** BODY COLOUR **GREY**

BEAM ANGLE




CRI 85


IP65

PF >0.95

Material : Aluminium



NLH-2121

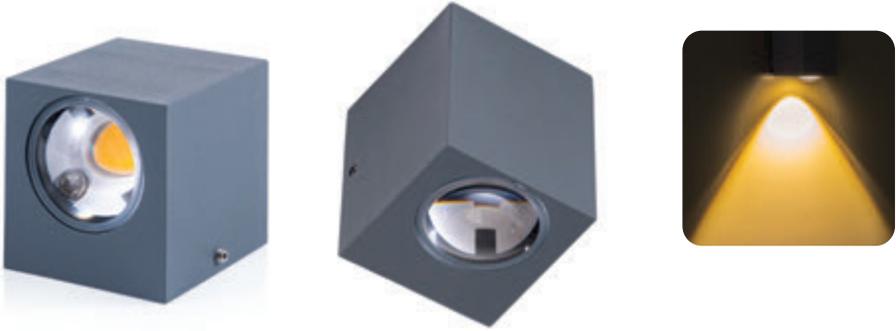


WATT	DIMENSION
5W	54X56X66


CCT **3K**
 BODY COLOUR **GREY**

BEAM ANGLE **45°**
CRI 85
IP65
PF >0.95

Material : Aluminium



NLH-2122

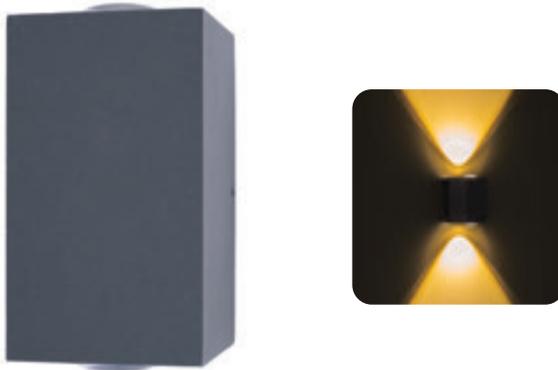


WATT	DIMENSION
2X5W	54X56X100



CCT **3K**
 BODY COLOUR **GREY**

BEAM ANGLE **45°**
CRI 85
IP65
PF >0.95

Material : Aluminium



NLH-2123



WATT	DIMENSION
5W	64X88X80
10W	64X88X130

CCT  3K
 BODY COLOUR  GREY

Material : Aluminium

BEAM ANGLE





CRI 85

IP65

PF >0.95



NLH-2124



WATT	DIMENSION
3W	54X43X82
6W	55X43X130

CCT  3K
 BODY COLOUR  GREY

Material : Aluminium

BEAM ANGLE



CRI 85

IP65

PF >0.95




NLH-2125



WATT	DIMENSION
3W	D40XH50

CCT	BODY COLOUR
 3K	 GREY

BEAM ANGLE	CRI	IP65	PF
 40°	85		>0.95



Material : Aluminium

bridgelux.


NLH-2126



WATT	DIMENSION
1W	30X40

CCT	BODY COLOUR
 3K	 GREY

BEAM ANGLE	CRI	IP65	PF
 40°	85		>0.95



Material : Aluminium

bridgelux.

NLH 2127




WATT	DIMENSION
2W	D30XH80

CCT	BODY COLOUR
 3K	 GREY

Material : Aluminium

BEAM ANGLE



NLH-2128




WATT	DIMENSION
7W	D148X35

CCT	BODY COLOUR
 3K	 GREY

Material : Aluminium

BEAM ANGLE



NLH-2129



WATT	DIMENSION
7W	148X148X35

CCT	BODY COLOUR
3K	GREY


Material : Aluminium

BEAM ANGLE



CRI
85

IP65



NLH-2130



WATT	DIMENSION
7W	200X90X35

CCT	BODY COLOUR
3K	GREY

Material : Aluminium


BEAM ANGLE



CRI
85

IP65

PF
>0.95



NLH-2131



WATT	DIMENSION
7W	D150XW25

CCT	BODY COLOUR
3K	GREY

Material : Aluminium


BEAM ANGLE





CRI
85

IP65

PF
>0.95



NLH-2132

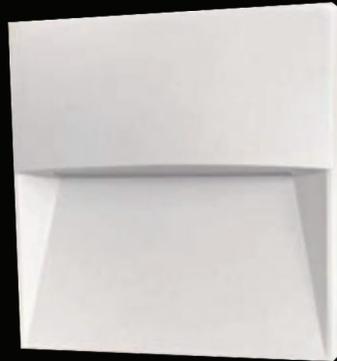

WATT	DIMENSION
7W	L150XH150XW25

CCT	BODY COLOUR
3K	GREY

Material : Aluminium


BEAM ANGLE



CRI
85

IP65

PF
>0.95



NLH-2133 RD



WATT	DIMENSION
10W	160X100

CCT	BODY COLOUR
 3K	 GREY

Material : Aluminium


BEAM ANGLE



CRI
85

IP65

PF
>0.95



NLH-2134 SQ



WATT	DIMENSION
10W	160X160X100

CCT	BODY COLOUR
 3K	 GREY

Material : Aluminium


BEAM ANGLE



CRI
85

IP65

PF
>0.95



NLH-2135 RD



WATT	DIMENSION
7W	108X105

CCT	BODY COLOUR
3K	GREY

Material : Aluminium


BEAM ANGLE



CRI 85

IP65

PF >0.95



NLH-2136 SQ



WATT	DIMENSION
7W	105X105X108

CCT	BODY COLOUR
3K	GREY

Material : Aluminium


BEAM ANGLE



CRI 85

IP65

PF >0.95



NLH-2137 RD



WATT	DIMENSION
7W	150X45

CCT	BODY COLOUR
 3K	 GREY

Material : Aluminium


BEAM ANGLE



CRI 85

IP65

PF >0.95



NLH-2138 SQ



WATT	DIMENSION
7W	150X150X45

CCT	BODY COLOUR
 3K	 GREY

Material : Aluminium


BEAM ANGLE




CRI 85

IP65

PF >0.95




NLH-2139



WATT	DIMENSION
4W	42X32X35

CCT	BODY COLOUR
 3K	 GREY

BEAM ANGLE	CRI	IP65	PF
 24°	85		>0.95



Material : Aluminium

bridgelux.


NLH 2140



WATT	DIMENSION
2X3W	25X25X75

CCT	BODY COLOUR
 3K	 GREY

BEAM ANGLE	CRI	IP65	PF
 10° 60°	85		>0.95



Material : Aluminium

bridgelux.

NLH 2141



WATT	DIMENSION
3W	40X60X90




BEAM ANGLE



Material : Aluminium

bridgelux®



NLH 2142



WATT	DIMENSION
2X3W	40X60X120




BEAM ANGLE



Material : Aluminium

bridgelux®



NLH-2143




WATT	DIMENSION
E27	200X150X120



CCT	BODY COLOUR
 3K	 GREY

BEAM ANGLE	IP65
 120°	<div style="border: 1px solid black; padding: 5px; display: inline-block;">IP65</div>

Material : Aluminium



NLH-2145




WATT	DIMENSION
6X1W	63X30X63

CCT	BODY COLOUR
 3K	 GREY

IP65

Material : ALUMINIUM



NLH-2146




WATT	DIMENSION
6X1W	63X30X63




CCT	BODY COLOUR
3K	GREY

IP65

Material : ALUMINIUM



NLH-2147




WATT	DIMENSION
4X1W	35X20X96
8X1W	35X20X203

CCT	BODY COLOUR
3K	GREY

IP65

Material : ALUMINIUM

NLH-2148



WATT	DIMENSION
6W	63X30X63


CCT	BODY COLOUR
3K	GREY

BEAM ANGLE	IP65
3x155°	IP65

CREE ⇄

Material : ALUMINIUM

NLH-2149



WATT	DIMENSION
20W	350x250x265

CCT	BODY COLOUR
3K	GREY

BEAM ANGLE	IP65
90°	IP65

bridgelux

Material : ALUMINIUM

NLH-2150



WATT	DIMENSION
6W	140x130x60

CCT **BODY COLOUR**

 
3K **GREY**


Material : ALUMINIUM

BEAM ANGLE



IP65

CREE ⇄



NLH-2151



WATT	DIMENSION
4W	75X55X75

CCT **BODY COLOUR**


 
3KGBR **BK**

Material : ALUMINIUM

BEAM ANGLE



IP65




NLH-2152



WATT	DIMENSION
2x3	80x38x78
4x3	115x38x78


CCT **RGB**
 BODY COLOUR **BK**

BEAM ANGLE



Material : ALUMINIUM

NLH-2153



WATT	DIMENSION
2X1	W45XH90




CCT **3K**
 BODY COLOUR **GREY**

BEAM ANGLE



Material : ALUMINIUM

NLH-2154

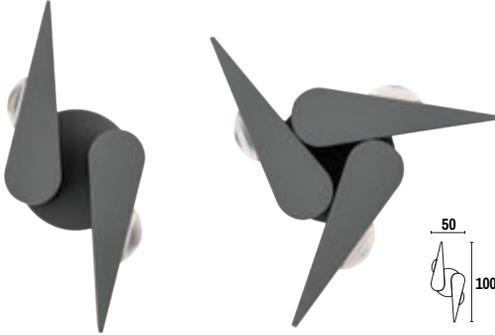

WATT	DIMENSION
2X1	W50XH100
3X1	W50XH100

CCT BODY COLOUR



Material : ALUMINIUM


BEAM ANGLE



IP65

PF
>0.50

NLH-2155



WATT	DIMENSION
5W	L30XH120XW75

CCT BODY COLOUR



Material : ALUMINIUM


BEAM ANGLE



IP65

PF
>0.50

NLH-2156



WATT	DIMENSION
6W	L75XH120XW75

CCT BODY COLOUR BEAM ANGLE



3K



GREY



80°

CRI 80


IP65

PF >0.90



Material : ALUMINIUM + GLASS

NLH-2157



WATT	DIMENSION
7W	D72XH140XL180

CCT BODY COLOUR BEAM ANGLE



3K



GREY



36°

IP65

CRI 80


IP65

PF >0.90



Material : ALUMINIUM + PC

NLH-2161



WATT	DIMENSION
5W	80x80x50

CCT BODY COLOUR



3K



GREY

BEAM ANGLE




90°

IP65



Material : ALUMINIUM

NLH-2162



DIMENSION	HOLDER
L96XW115XH250	E-27

CCT BODY COLOUR BEAM ANGLE



3K



BK



80°

CRI 80

IP65

Material : ALUMINIUM+ANTI UV PC MATERIAL



GATE LIGHT


NLH-2596



WATT	DIMENSION
18W	150X150X300



Material : Aluminium




NLH-2597



WATT	DIMENSION
18W	150X150X300



Material : Aluminium



NLH-2598




WATT	DIMENSION
50W	D400xH270



Material : Aluminium

bridgelux.




NLH-2599



HOLDER	DIMENSION
E27	160X190



Material : Aluminium



NLH-2600



HOLDER	DIMENSION
E27	150X150X160
E27	200X200X250

BODY COLOUR




GREY

Material : Aluminium

BEAM ANGLE



IP44



NLH-2601



WATT	DIMENSION
12W	230X125X225

CCT **BODY COLOUR**



3K



GREY

Material : Aluminium


BEAM ANGLE



IP65

CRI
85

PF
>0.95



NLH-2602



WATT	DIMENSION
18W	D170XH220XB86
24W	D220XH280XB86

CCT BODY COLOUR BEAM ANGLE



3K



GREY



128°



CRI 85




IP65

Material : Aluminium

bridgelux.



PF >0.95



NLH-2603



HOLDER	DIMENSION
E27	175X157X200

BODY COLOUR



GREY

BEAM ANGLE




180°



IP54

Material : Aluminium



NLH-2604




HOLDER	DIMENSION
E27	225X225X200

BODY COLOUR



Material : Aluminium

BEAM ANGLE



NLH-2605




HOLDER	DIMENSION
E27	150X150X213

BODY COLOUR



Material : Aluminium

BEAM ANGLE



NLH-2606



HOLDER	DIMENSION
E27	150X150X213


BODY COLOUR



BEAM ANGLE



Material : Aluminium



NLH-2607



WATT	DIMENSION
12W	150X150X213

CCT




BODY COLOUR



BEAM ANGLE



Material : Aluminium





BOLLARD LIGHT

NLH-2608



HOLDER	DIMENSION
E27	225X225X200
E27	225X225X600

BODY COLOUR





GREY



BEAM ANGLE



Material : Aluminium



NLH-2609



HOLDER	DIMENSION
E27	225X225X200
E27	225X225X600

BODY COLOUR





GREY



BEAM ANGLE



Material : Aluminium



NLH-2610



HOLDER	DIMENSION
E27	225X300
E27	225X600

BODY COLOUR




GREY

BEAM ANGLE

IP44



Material : Aluminium



NLH-2611



HOLDER	DIMENSION
E27	88x300
E27	88x600

BODY COLOUR




GREY

BEAM ANGLE


IP44



Material : Aluminium



NLH-2612



HOLDER	DIMENSION
E27	88X88X200
E27	88X88X600

BODY COLOUR



GREY

BEAM ANGLE

IP44



Material : Aluminium

NLH-2613



WATT	DIMENSION
2X5W	D190XH300
2X5W	D190XH600
2X5W	D190XH800

CCT



3K

BODY COLOUR



GREY

BEAM ANGLE




CRI 90

IP65

PF >0.95

Material : Aluminium

bridgelux.



NLH-2614



WATT	DIMENSION
7W	150X200
7W	150XV600




Material : Aluminium



CRI 85

IP66

PF >0.95



NLH-2615



WATT	DIMENSION
7W	150X200
7W	150X600




Material : Aluminium



CRI 85

IP66

PF >0.95



NLH-2616



WATT	DIMENSION
7W	120X120X200
7W	120X120X600



Material : Aluminium



BEAM ANGLE




CRI 85

IP66

PF >0.90

bridgelux.



NLH-2617



WATT	DIMENSION
7W	165X55X300
7W	165X55X600



Material : Aluminium



BEAM ANGLE




CRI 90


IP65

PF >0.95

bridgelux.



NLH-2618



WATT	DIMENSION
7W	110X110X200
7W	110X110X600




Material : Aluminium



bridgelux.

NLH-2619



WATT	DIMENSION
12W	140X140X300
12W	140X140X600



Material : Aluminium



CREE


NLH-2620



WATT	DIMENSION
10W	120X200
10W	120X600



BEAM ANGLE



Material : Aluminium

bridgelux.


NLH-2621



WATT	DIMENSION
E27	120X300
E27	120X600




BEAM ANGLE



Material : Aluminium

NLH-2622



HOLDER	DIMENSION
E27	D210X321

BODY COLOUR



GREY

BEAM ANGLE




120°



IP54

Material : ALUMINIUM

NLH-2623



WATT	DIMENSION
12W	230x130x600

CCT BODY COLOUR



3K



GREY

BEAM ANGLE



120°




IP65

Material : ALUMINIUM



NLH-2624



HOLDER	DIMENSION
E27	D210X321

BODY COLOUR





BEAM ANGLE



Material : ALUMINIUM

NLH-2625

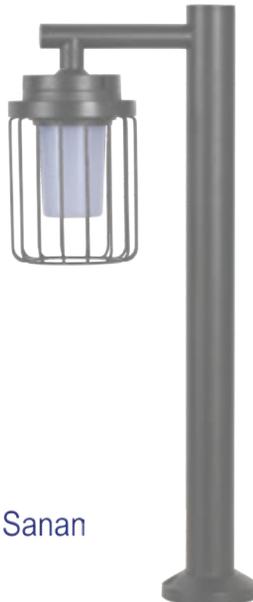

WATT	DIMENSION
12W	230x130x600

CCT **BODY COLOUR**




BEAM ANGLE



Material : ALUMINIUM

NLH-2626



DIMENSION	HOLDER
L100XW104XH250	E-27

BODY COLOUR



BK

BEAM ANGLE




IP65

CRI 80

IP65

Material : ALUMINIUM+ANTI UV PC MATERIAL

NLH-2627



WATT	
7W	L105XW72XH1000

CCT



3K

BODY COLOUR



GREY

BEAM ANGLE



CRI 80


IP65

PF >0.90

bridgelux.

Material : ALUMINIUM

NLH-2628



WATT	DIMENSION
10W	W80XL120XH600

CCT BODY COLOUR

3K GREY

BEAM ANGLE



IP65

CRI
80

IP65

PF
>0.90



Material : ALUMINIUM



OUTDOOR SURFACE LIGHT


MIRACLE



SENSOR

WATT	DIMENSION
10W	D140X50MM
18W	D170X50MM

CCT



Material : PC VIRGIN

BODY COLOUR



BEAM ANGLE




CRI 85

IP65

PF >0.95



180°
Smart Control-Human Sensor



MARIGOLD



WATT	DIMENSION
10W	D140XH50
18W	D170XH50

CCT



Material : PC VIRGIN

BODY COLOUR




BEAM ANGLE



CRI 85

IP65

PF >0.95



NLH-3812



WATT	DIMENSION
7W	D60XH85
12W	D75XH95
18W	D86XH110


CCT		
		
3K	4K	6K

Material :Aluminium


BODY COLOUR



BEAM ANGLE



bridgelux.



TUBE



WATT	DIMENSION
5W	65X113
10W	65X158
18W	100X120
30W	120x130

CCT
 3K
 GREY

Material : Aluminium


BEAM ANGLE



CRI
90

IP65

PF
>0.95



GLAZE



WATT	DIMENSION
5W	D60X14mm

CCT
 3K
 4K
 BK

Material : Aluminium


BEAM ANGLE



CRI
85

PF
>0.75

IP
65



TABLET-S



SENSOR

WATT	DIMENSION
10W	D67XL167XH45
18W	D95XL210XH55

CCT BODY COLOUR

3K 6K WH

Material : PC VIRGIN

BEAM ANGLE




CRI
85

IP65

PF
>0.95



180°
Smart Control
Human Sensor



TABLET



WATT	DIMENSION
10W	D67XL167XH45
18W	D95XL210XH55

CCT BODY COLOUR

3K 6K WH

Material : PC VIRGIN


BEAM ANGLE



CRI
85

IP65

PF
>0.95





FOOT LIGHT

NLH-5107




WATT	DIMENSION	CUTOUT
3W	103X58X55	98X53X50

CCT BODY COLOUR

 3K GREY

BEAM ANGLE
 CRI 85 IP65 PF >0.95

Material : Aluminium



NLH-5108




WATT	DIMENSION	CUTOUT
5W	210X58X55	205X55X50

CCT BODY COLOUR

 3K GREY

BEAM ANGLE
 CRI 85 PF >0.95 IP65

Material : Aluminium



NLH-5209




WATT	DIMENSION	CUT OUT
3W	85X85	70X70

CCT BODY COLOUR BEAM ANGLE



Material : Aluminium



NLH-5209 (SENSOR)




WATT	DIMENSION	CUT OUT
3W	85X85	70X70

CCT BODY COLOUR BEAM ANGLE



Material : Aluminium




NLH-5210



WATT	DIMENSION	CUT OUT
3W	60X60	53X53

CCT	BODY COLOUR
 3K	 WH  BK

BEAM ANGLE	CRI	IP54	PF
 60°	80		>0.95



Material : Aluminium




NLH-5211



WATT	DIMENSION	CUT OUT
3W	60X60	53X53

CCT	BODY COLOUR
 3K	 WH  BK

BEAM ANGLE	CRI	IP54	PF
 40°	80		>0.95



Material : Aluminium




NLH-5212



WATT	DIMENSION	CUT OUT	CCT	BODY COLOUR	BEAM ANGLE	CRI	IP	PF
1W	D45XH65MM	D42XH60MM	3K	GREY	10°	85	65	>0.95

Material : Aluminium




NLH-5213



WATT	DIMENSION	CUT OUT	CCT	BODY COLOUR	BEAM ANGLE	CRI	IP	PF
1W	D45XH35	Ø40	3K	BK WH	15°	85	65	>0.95

Material : Aluminium





SPIKE LIGHT

DART



WATT	DIMENSION
10W	79X153

CCT	BODY COLOUR
 3K	 GREY

Material : Aluminium

BEAM ANGLE




CRI
85


IP65

PF
>0.95

CREE ⇄



SPIKY



WATT	DIMENSION
3W	D42XH72
7W	D50XH78
12W	D63XH83

CCT

3K AMBER

BLUE PINK GREEN

BODY COLOUR

GREY

BEAM ANGLE

40°

CRI 85


IP65

PF >0.95



Material : Aluminium

STICK



WATT	DIMENSION
3W	D45XH91
7W	D66XH129
12W	D66XH129

CCT

3K

BODY COLOUR

GREY

Material : Aluminium

BEAM ANGLE

38°

CRI 90

IP65


PF >0.95

EPISTAR

STICK BASE



GIANT



WATT	DIMENSION
20W	D100XH130

CCT



BODY COLOUR





BEAM ANGLE



Material : Aluminium



CONE

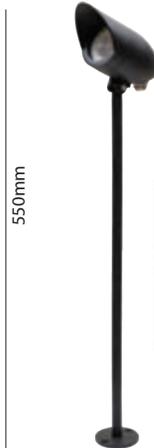

HOLDER	DIMENSION
GU-10	60mmX141

BODY COLOUR




BEAM ANGLE



Material : Aluminium

TREE LIGHTER



WATT	DIMENSION
18W	L215XH60

CCT



BODY COLOUR



BEAM ANGLE



CRI
85

IP65

PF
>0.95


Material : Aluminium

BUSH



BUSH BELT

BUSH BUCKLE

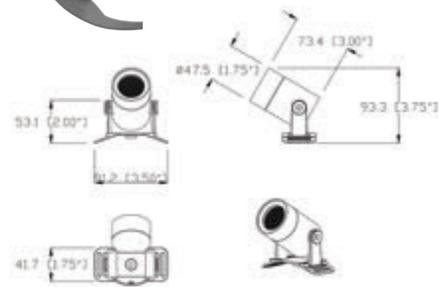

WATT	DIMENSION
5W	48x74

POST



WATT	DIMENSION
12W	D75XH75

CCT	BODY COLOUR	BEAM ANGLE	CRI	IP65
3K	BK	60°	85	IP65

Material : Aluminium

ZIP



WATT	DIMENSION
12W	D75XH75

CCT	BODY COLOUR	BEAM ANGLE	CRI	IP65
3K	BK	60°	85	IP65


Material : Aluminium

POST & ZIP ROD

HEIGHT ADJUSTABLE ROD
MATERIAL ALUMINIUM



NLH-6101



WATT	DIMENSION
10W	380X60

CCT
27K

BODY COLOUR
GREY

BEAM ANGLE
120°

CRI
85

IP65

PF
>0.95

Material : Aluminium

CREE ⇄

NLH-6102



WATT	DIMENSION
7W	110X600

CCT
3K

BODY COLOUR
GREY

BEAM ANGLE
120°

CRI
85

IP65

PF
>0.95

Material : Aluminium

Sanan

NLH-6501



WATT	DIMENSION	CUTOUT
3W 1WAY	D52XH90	46XH80
3W 2WAY	D52XH90	46XH80
3W 3WAY	D52XH90	46XH80
3W 4WAY	D52XH90	46XH80

CCT



BODY COLOUR



BEAM ANGLE




CRI
85

PF
>0.80

IP
65

Material : Aluminium



NLH-6503



WATT	DIMENSION	CUTOUT
1W	D65*H93	Ø50X70
1.7W	D65*H93	Ø50X70
2.3W	D65*H93	Ø50X70
3W	D65*H93	Ø50X70

CCT



BODY COLOUR



BEAM ANGLE




CRI
85


PF
>0.95

IP
65

Material : Aluminium



NLH-6551



WATT	DIMENSION	CUTOUT
5W	D65*H78	Ø50X70
7W	D105*H80	Ø95X80

CCT **BODY COLOUR**

3K GREY

BEAM ANGLE



Material : Aluminium



NLH-6552



WATT	DIMENSION	CUT OUT
1X3W	D45XH46	35
3X3W	D85XH70	65
6X3W	D110XH70	90

CCT **BODY COLOUR**


 

3K SILVER

BEAM ANGLE



Material : SS



NLH-6553



WATT	DIMENSION	CUT OUT
3W	D45XH46	35
6W	D60XH60	45
12W	D85XH70	65

CCT **3K** BODY COLOUR **SILVER**

Material : SS


BEAM ANGLE



IP66

CRI
80

PF
>0.95



bridgelux.



UNDERWATER LIGHT

NLH-7103



WATT	DIMENSION
3W	D75XH20
3X3W	D75XH20
6W	D100XH20
6X3W	D100XH20
9W	D127XH20
9X3	D127XH20
12W	D127XH20
12X3W	D127XH20

CCT



3K RGB

BODY COLOUR



SILVER

BEAM ANGLE




CRI
80

IP68

PF
>0.95

Material : SS



bridgelux®

NLH-7104



WATT	DIMENSION
3W	D75XH25
6W	D100XH25
9W	D125XH125
12W	D125XH125

CCT



3K RGB

BODY COLOUR



SILVER

BEAM ANGLE




IP68

CRI
80

PF
>0.95

Material : SS



bridgelux®

NLH-7105



WATT	DIMENSION
12W	D287
9X3W	D287
12X3W	D287

CCT



3K RGB

BODY COLOUR



SILVER+PC

BEAM ANGLE




60°

IP68

CRI
80

PF
>0.95




D287

Material : SS+ PC VIRGIN

bridgelux.

NLH-7106



WATT	DIMENSION
9W	D230
12W	D230
9X3W	D230
12X3W	D230

CCT



3K RGB

BODY COLOUR



SILVER

BEAM ANGLE



60°

IP68

CRI
80

PF
>0.95



D230

Material : SS+ PC VIRGIN

bridgelux.

NLH-7107



WATT	DIMENSION	CUT OUT
3W	45X20	35

CCT
 3K
 RGB

BODY COLOUR
 SILVER


BEAM ANGLE



IP68

CRI 80

PF >0.95



Material : SS

bridgelux.

NLH-7108



WATT	DIMENSION	CUT SIZE
3W	100X25	75
3X3W	100X25	75
6W	120X25	100
6X3W	120X25	100
9W	150X25	125
9X3W	150X25	125
12W	150X25	125
12X3W	150X25	125

CCT
 3K
 RGB

BODY COLOUR
 SILVER


BEAM ANGLE



IP68

CRI 80

PF >0.95



Material : SS

bridgelux.

NLH-7109



WATT	DIMENSION	CUT SIZE
6W	130X30	25
6X3W	130X30	25
9W	150X30	38
9X3W	150X30	38
12W	150X30	38
12X3W	150X30	38

CCT
 **3K**  **RGB**

BODY COLOUR
 **BK**


BEAM ANGLE
 **36°**

IP68

CRI 80

PF >0.95

Material : SS



bridgelux®

NLH-7110



WATT	DIMENSION
3W	80
3X3W	80
6W	120
6X3W	120
9W	140
9X3W	140
12W	140
12X3W	140

CCT
 **3K**  **RGB**

BODY COLOUR
 **SILVER**


BEAM ANGLE
 **36°**

IP68

CRI 80

PF >0.95

Material : SS



bridgelux®

NLH-7111



230mm

WATT	DIMENSION
12W	D230

CCT



3K



RGB

BODY
COLOUR



WH

BEAM ANGLE



60°

IP68

CRI
80

PF
>0.95


Material : PC VIRGIN

OSRAM



**WALL GRAZER
LIGHT**

NLH-7501



WATT	DIMENSION
18W	45X500
36W	48X1000



Material : Aluminium

bridgelux.

NLH-7502




WATT	DIMENSION
18W	28X500
36W	28X1000




Material : Aluminium

OSRAM



NLH-7503



WATT	DIMENSION
18W	500MM
36W	1000MM

CCT

 2200K

BODY COLOUR

 SILVER

BEAM ANGLE

 5°

IP65


CRI 80

PF >0.95

OSRAM

Material : Aluminium

NLH-7521



WATT	DIMENSION
24W	L190XW100XH215

CCT

 3K

BODY COLOUR

 GREY

BEAM ANGLE

 8°

CRI 80

IP65



PF >0.90

bridgelux.

Material : ALUMINIUM

WATERPROOF STRIP

2835

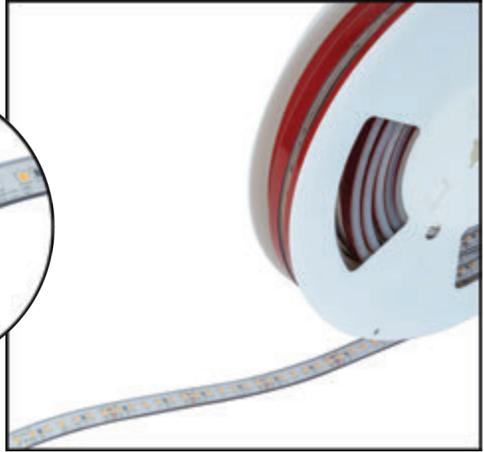


LED	SIZE(MM)	INPUT	CCT	POWER	IP
120	8	12V	3K	9.6W	65
120	8	12V	3K-4K	9.6W	68
120	8	12V	ICE BLUE	9.6W	68
120	5	24V	3K-4K	9.6W	68
168	10	24V	3K-4K	12W	68
240	10	24V	3K-4K	20W	68
120	10	48V	27K	9.6W	68

CRI 90	Lumens/LED 24-26	PCB 30Z
------------------	----------------------------	-------------------

2835/42

LANCE

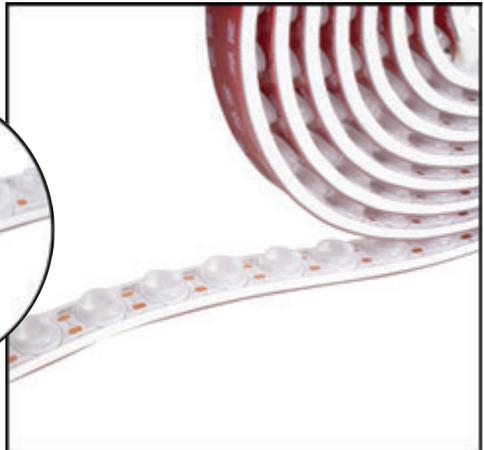

LED	SIZE	INPUT
42	18MM	24V

CCT **BEAM ANGLE**

2700K



CRI
85

IP65

Y-16-16



LED	SIZE	INPUT
48	16X16	24V

CCT
27K

BEAM ANGLE
30°

IP65

CRI
85

APEX



WATT	DIMENSION	AMP
60W	L152XW30HXH20	2.5
120W	L195XW53XH20	5
240W	L225XW65XH30	10
400W	L225XW75XH35	16.7

IP67

AC INPUT
175-265V

PF
>0.97

DC INPUT
24V

BOOST





WATT	DIMENSION	AMP
100W	L195XW50XH24	2.08
200W	L225XW50XH24	4.16
250W	L255XW65XH30	5.2
400W	L255XW65XH30	8.33

IP67

AC INPUT
175-265V

PF
>0.97

DC INPUT
48V

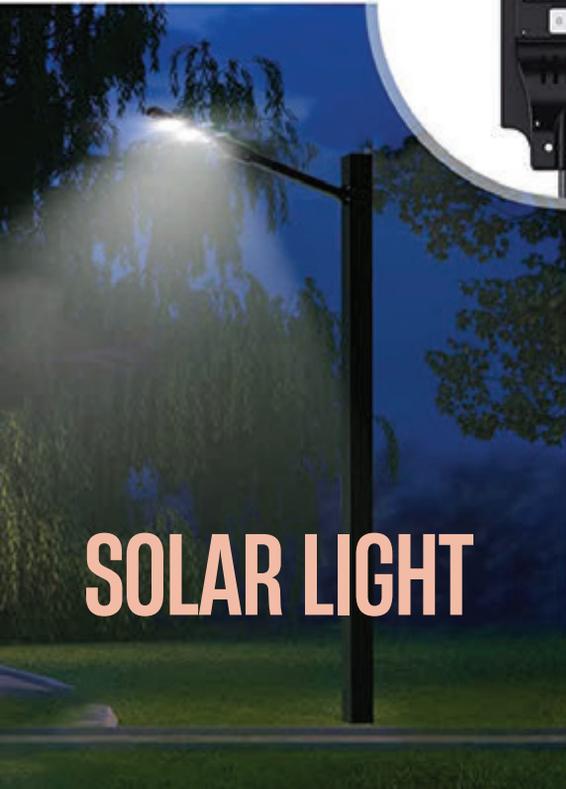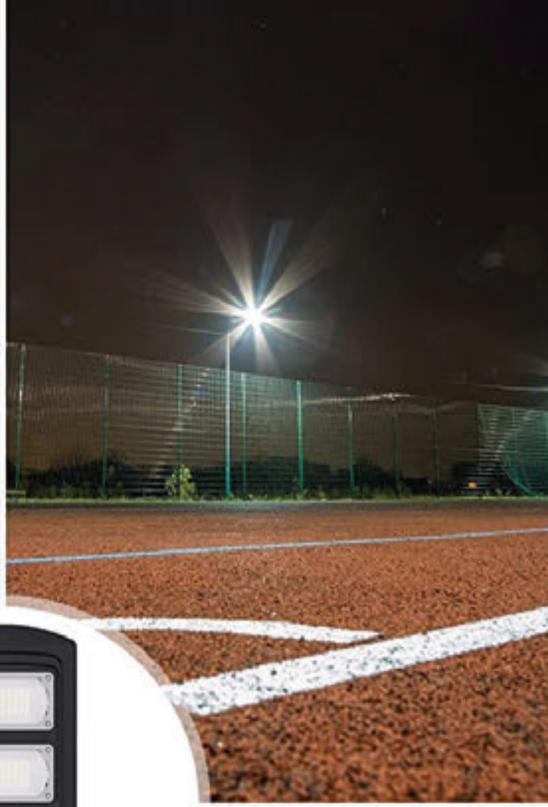

SOLAR LIGHT

NLH-2144



SOLAR WALL LIGHT

WATT	DIMENSION	BATTERY
3W	120x171x58	3.7V 1.8AH
2x3W	181x171x58	3.7V 2.4AH

CCT BODY COLOUR



Material : Polysilicon Silicon


BEAM ANGLE



IP65



Smart Control
Human Sensor



NLH-8001



Solar Panel



WATT	DIMENSION	BATTERY	LUMEN
3W	130X130X135	1800MAH	800LM

CCT BODY COLOUR



Material : Polysilicon Silicon

Charge time
(Hrs.)
8-9H

IP65




Smart Control
Human Sensor

NLH-8002



Solar Panel



WATT	DIMENSION	BATTERY	LUMEN
3W	35X65X630	1800MAH	800LM

CCT BODY COLOUR



Charge time
(Hrs.)
8-9H


IP65




Material : Polysilicon Silicon

Smart Control
Human Sensor

SOLARIS-(SENSOR)



WATT	DIMENSION	LM	Charge time (Hrs.)	Battery
20W/30W	W200*L395	420	4-6H	3.2V/05AH
40W/60W	W220*L485	670	4-6H	3.2V/10VAH
80W/90W	W240*L625	880	4	3.2V/15AH
120W	W240*L720	1000	4	3.2V/20AH

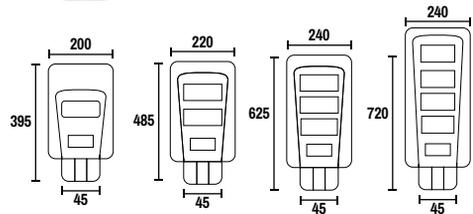

Material : Polycrystalline Silicone

BATTERY BACK-UP
8 To 10 HRS.

FUNCTION
Smart Lighting Control+radar Sensor+remote Controller

CCT

IP65

LED 5730

6K



180°
Smart Control+ Human Sensor

SOLARIS



WATT	DIMENSION	LM	Charge time (Hrs.)	Battery
30W	W200*L395	420	4-6H	3.2V/05AH
60W	W220*L485	670	4-6H	3.2V/10VAH
90W	W240*L625	880	4	3.2V/15AH
120W	W240*L720	1000	4	3.2V/20AH

BATTERY BACK-UP




6 To 8 HRS.

LED 5730

CCT

6K

IP65



Material : Polycrystalline Silicone

SUN GLOW

WATT	BATTERY
100w	3.2V/15AH
200w	3.2V/20AH
400w	3.2V/25AH


BATTERY BACK-UP

2 DAYS

IP65

Material : Aluminium
Polycrystalline Silicone



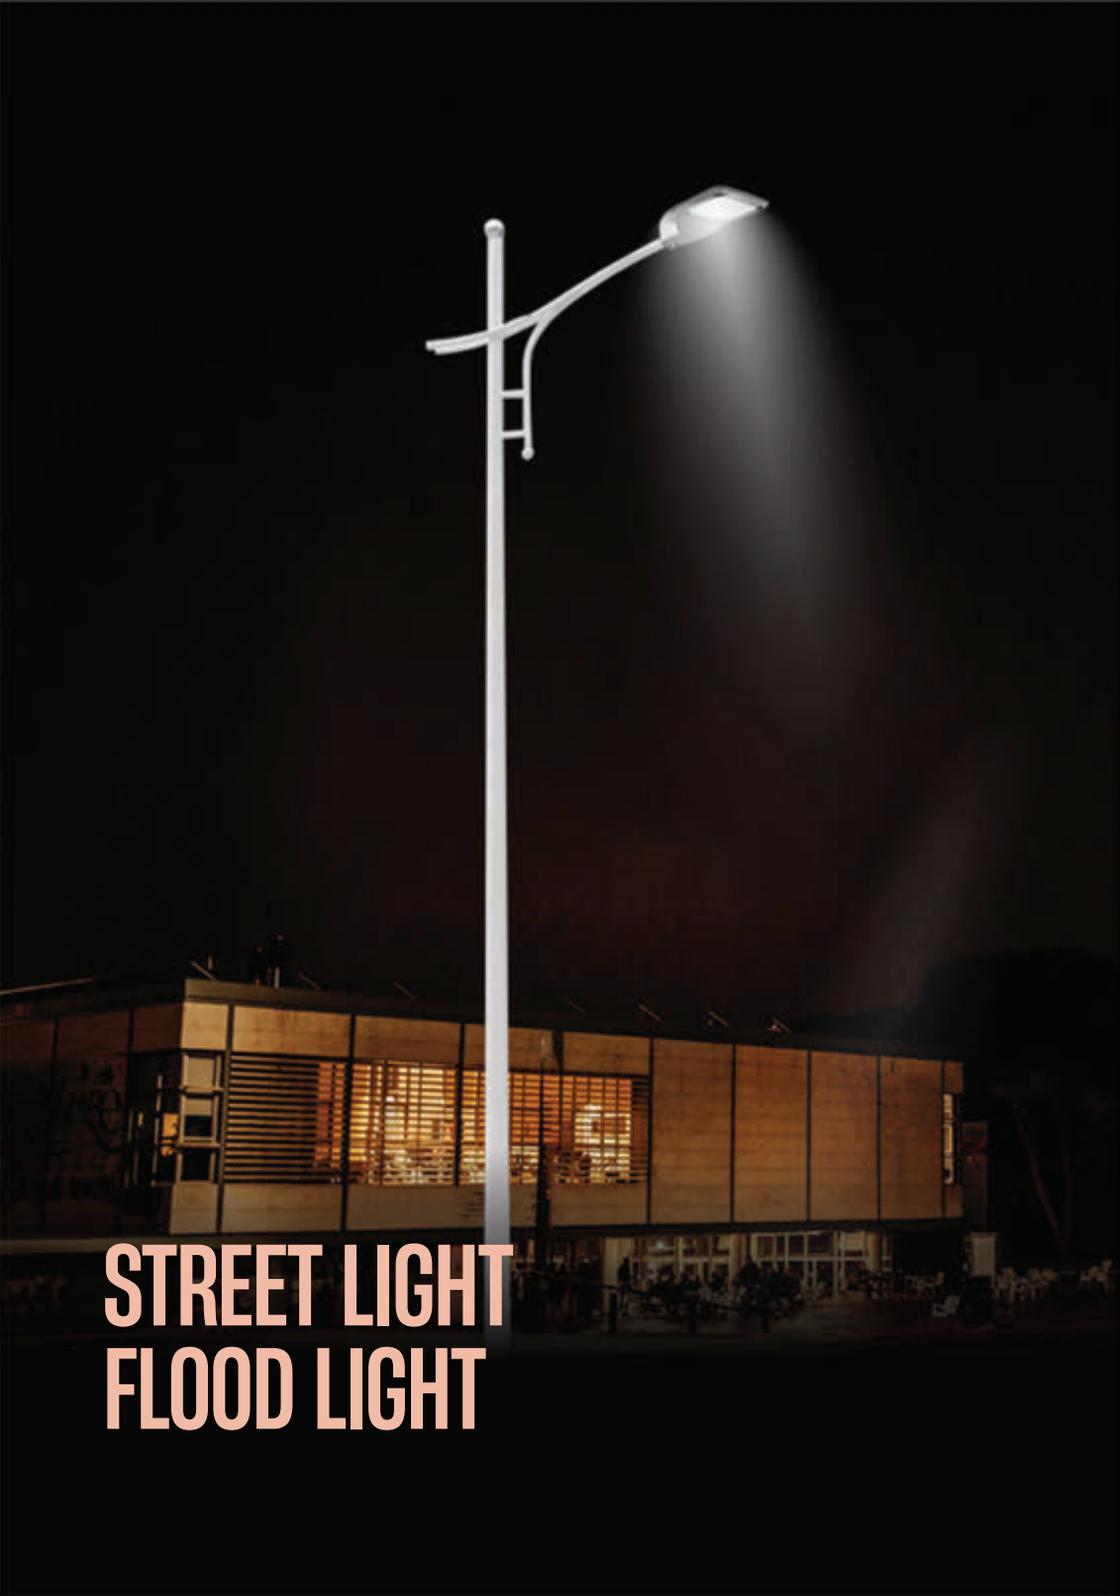


**STREET LIGHT
FLOOD LIGHT**

TURBO



WATT	DIMENSION	PIPE ID
24W	W155XL374	50mm
30W	W155XL374	50mm
50W	W173XL424	50mm
70W	W201XL533	62mm
100W	W201XL533	62mm
150W	W223XL588	62mm
200W	W252XL647	62mm

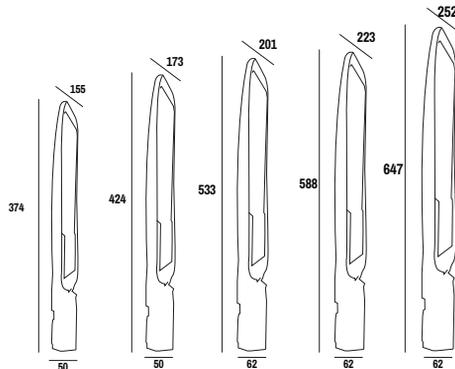

IP65

CCT
 3K 6K

BEAM ANGLE
 120°

CRI
85

SP
4to6KV

BODY COLOUR
 GREY

Material : ALUMINIUM

GLASSO



WATT	DIMENSION	PIPE ID
15W	325X108X55	45mm
18/20W	325X108X55	45mm
24W MINI	325X108X55	45mm
24W BIG	340X125X65	45mm
30W	370X135X60	45mm
36W	370X135X60	45mm
48/50W	390X135X75	45mm
60W	390X135X75	48mm

WATT	DIMENSION	PIPE ID
72W	390X135X75	48mm
100W	430X200X75	48mm
120W	430X200X75	48mm
150W	430X200X75	48mm
180W	430X200X75	58mm
200W	530X260X80	58mm
240W	530X260X80	58mm
300W	530X260X80	58mm

CCT BODY COLOUR



Material : Aluminium

BEAM ANGLE



PHILIPS

LYRA (LENS MODEL)



WATT	DIMENSION
24W	108x280x45
36W	130x240x45
50W	162x395x45
100W	192x480x70

CCT



BODY COLOUR



BEAM ANGLE



CRI 70

IP65

PF >0.95

SP 6KV

Material : Aluminium

PHILIPS

NEO



WATT	DIMENSION
20W	120X40X32
30W	152X178X55
50W	198X230X55
100W	245X285X80
150W	290X355X80
200W	320X425X80
250W	320X425X80

CCT



BODY COLOUR



BEAM ANGLE



CRI 70

IP65

PF >0.95

SP 6KV

CCT
RGB

Material : Aluminium

PHILIPS

TORRENT



WATT	DIMENSION
30W	148X13X23.8
50W	205X160X25.5
100W	270X210X25
150W	329X280X25
200W	378X280X25
300W	425X315X27
400W	470X360X28

CCT



3K 6K

BODY COLOUR



GREY

BEAM ANGLE



160°

CRI
70

IP65

PF
>0.95

SP
6KV

Material : Aluminium

RADO



WATT	DIMENSION
50W	120X40X32
100W	152X178X55
150W	198X230X55
200W	245X285X60
300W	290X355X60

CCT



3K 6K

BODY COLOUR



GREY

BEAM ANGLE



160°

CRI
70

IP65

PF
>0.95

SP
6KV

Material : Aluminium



PHILIPS



POLE LIGHT

NLH 9501

NLH 9502

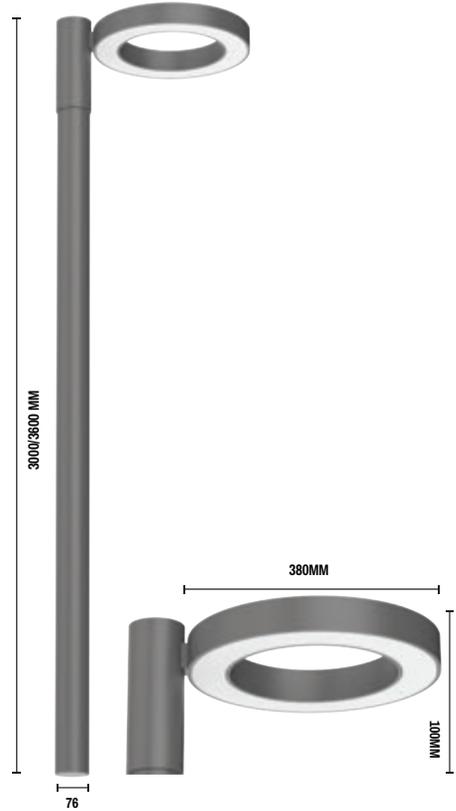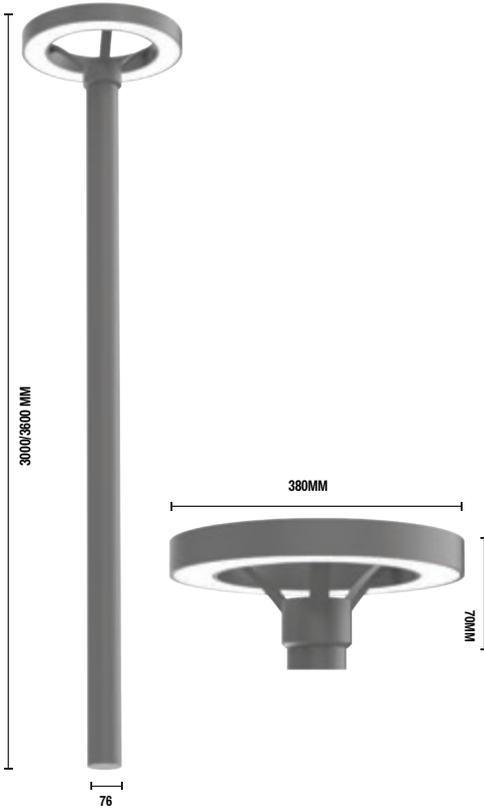

WATT	INPUT	OUTPUT	DIMENSION
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	D76x380MM
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +5%	D76x380MM

WATT	INPUT	OUTPUT	DIMENSION
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	D76x380MM
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +8%	D76x380MM

CCT: 3K 4K 6K

BODY COLOUR: GREY BK

IP65 PF >0.9

CCT: 3K 4K 6K

BODY COLOUR: GREY BK



IP65 PF >0.9

Material : MS/ALUMINIUM
Customizable

Material : MS/ALUMINIUM
Customizable

NLH 9503

NLH 9504

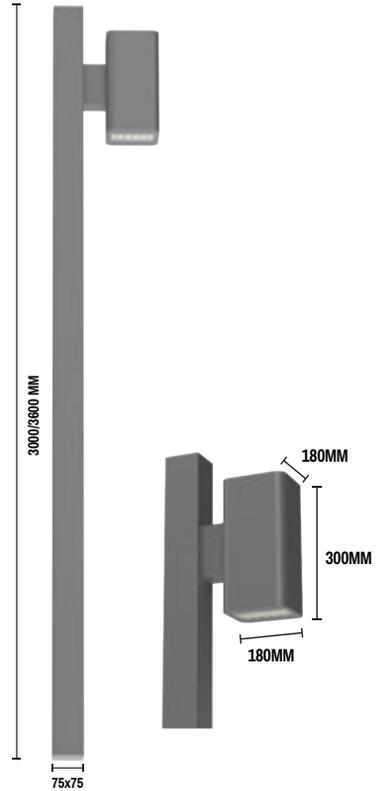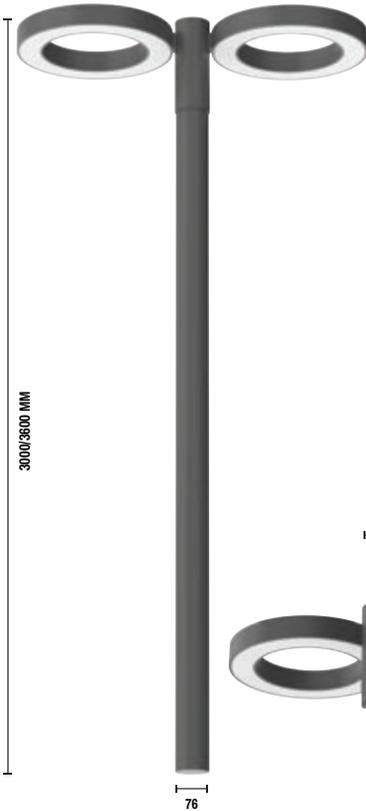

WATT	INPUT	OUTPUT	DIMENSION
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	D76x380MM
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +5%	D76x380MM

CCT: 3K 4K 6K

BODY COLOUR: GREY BK

IP65 PF >0.9

Material : MS/ALUMINIUM
Customizable



WATT	INPUT	OUTPUT	DIMENSION (mm)
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	75x75/100x50
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +5%	75x75/100x50

CCT: 3K 4K 6K


BODY COLOUR: GREY BK

IP65 PF >0.9


Material : MS/ALUMINIUM
Customizable



NLH 9505

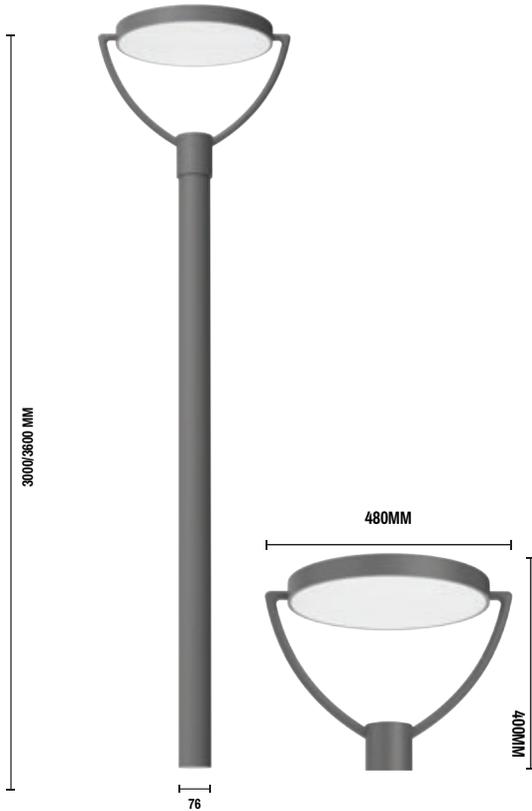

NLH 9506

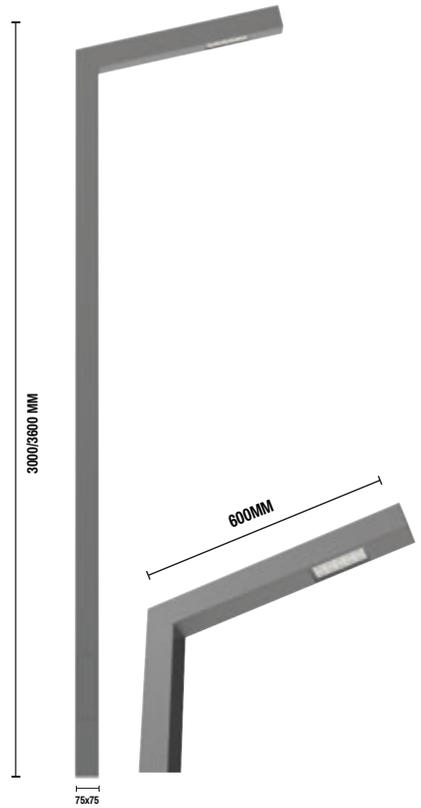

WATT	INPUT	OUTPUT	DIMENSION
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	D76x380MM
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +5%	D76x380MM

CCT



3K 4K 6K

BODY COLOUR



GREY BK

IP65

PF
>0.9

Material : MS/ALUMINIUM
Customizable



WATT	INPUT	OUTPUT	DIMENSION (mm)
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	75x75/100x50
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +5%	75x75/100x50

CCT



3K 4K 6K

BODY COLOUR



GREY BK


IP65

PF
>0.9


Material : MS/ALUMINIUM
Customizable



NLH 9507

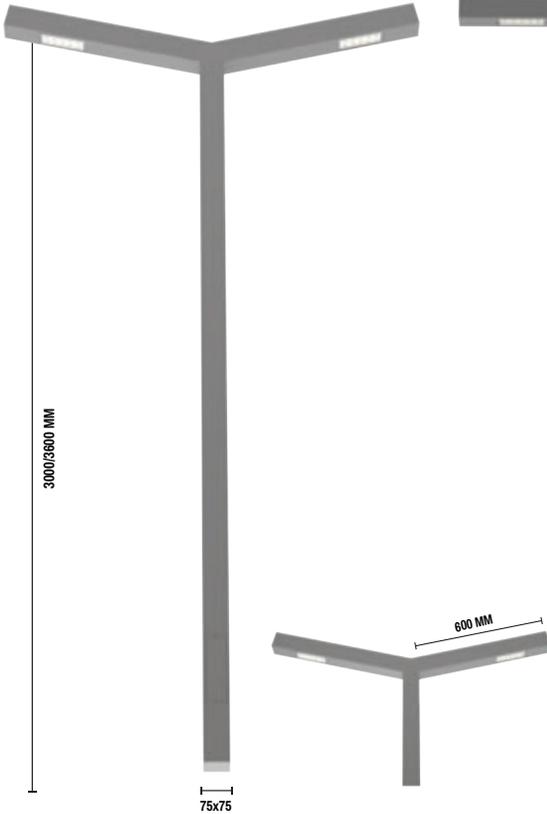

NLH 9508

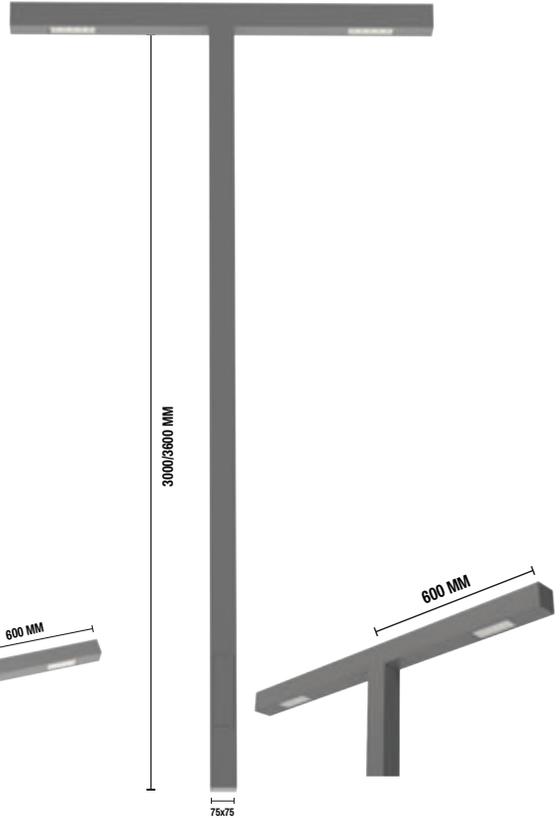

WATT	INPUT	OUTPUT	DIMENSION
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	75x75/100x50
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +5%	75x75/100x50

CCT



3K 4K 6K

BODY COLOUR



GREY BK



Material : MS/ALUMINIUM
Customizable



WATT	INPUT	OUTPUT	DIMENSION (mm)
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	75x75/100x50
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +5%	75x75/100x50

CCT



3K 4K 6K

BODY COLOUR



GREY BK




Material : MS/ALUMINIUM
Customizable



NLH 9509

NLH 9510

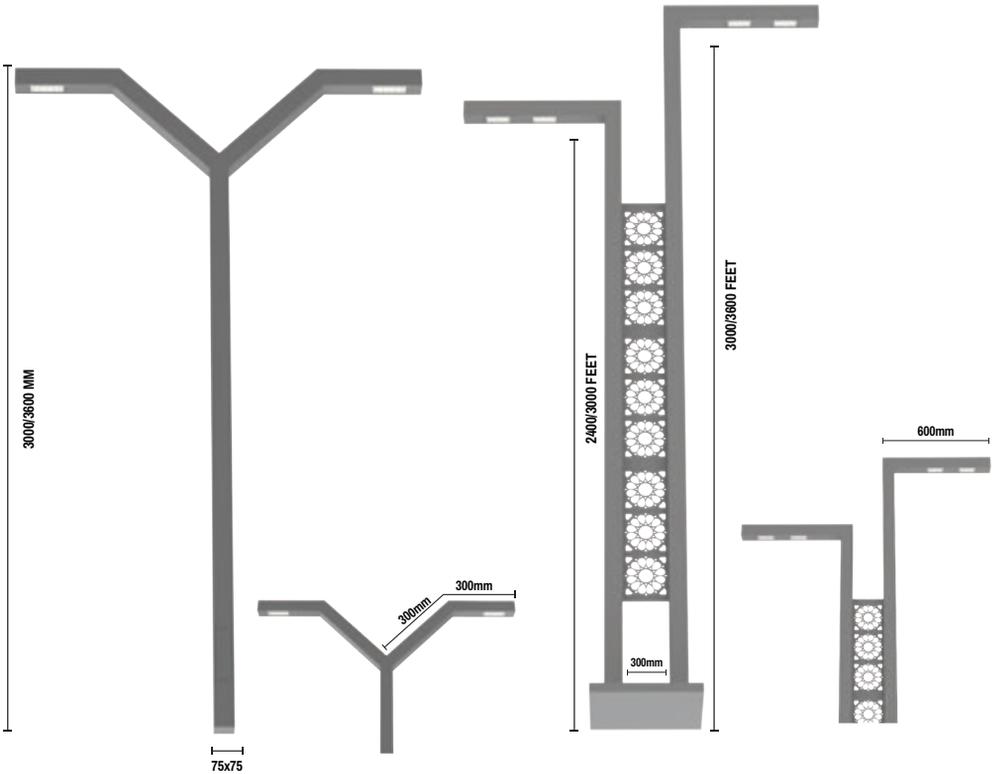

WATT	INPUT	OUTPUT	DIMENSION
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	75x75/100x50
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +8%	75x75/100x50

WATT	INPUT	OUTPUT	DIMENSION (mm)
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	75x75/100x50
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +5%	75x75/100x50

CCT: 3K 4K 6K

BODY COLOUR: GREY BK

IP65 PF >0.9

CCT: 3K 4K 6K

BODY COLOUR: GREY BK

IP65 PF >0.9


Material : MS/ALUMINIUM
Customizable




Material : MS/ALUMINIUM
Customizable



NLH 9511

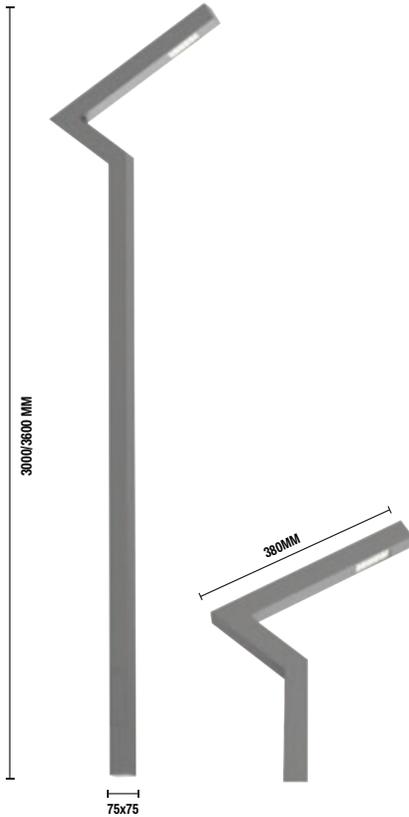

NLH 9512

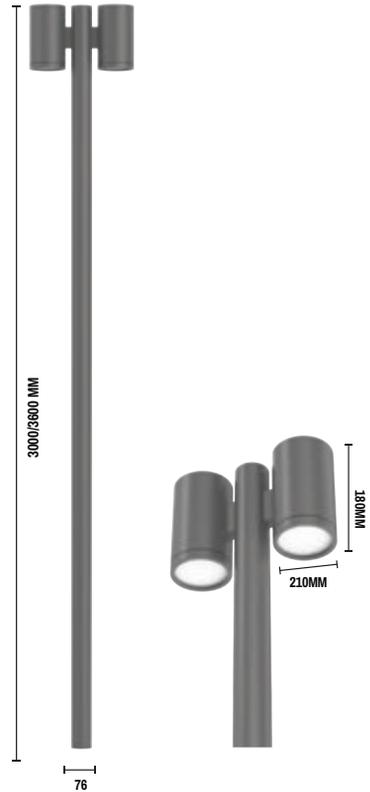

WATT	INPUT	OUTPUT	DIMENSION
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	75x75/100x50
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +8%	75x75/100x50

CCT: 3K 4K 6K

BODY COLOUR: GREY BK

IP65 PF >0.9

Material : MS/ALUMINIUM
Customizable



WATT	INPUT	OUTPUT	DIMENSION (mm)
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	D76
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +5%	D76

CCT: 3K 4K 6K


BODY COLOUR: GREY BK

IP65 PF >0.9

Material : MS/ALUMINIUM
Customizable



NLH 9513

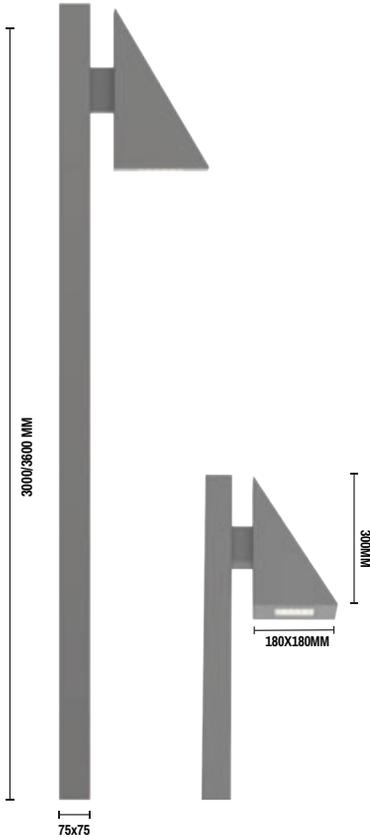


WATT	INPUT	OUTPUT	DIMENSION
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	75x75/100x50
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +8%	75x75/100x50



Material : MS/ALUMINIUM
Customizable



NLH 9514

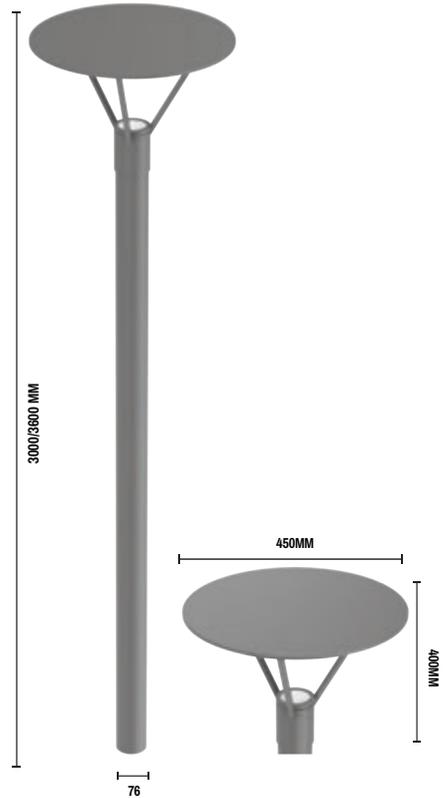


WATT	INPUT	OUTPUT	DIMENSION (mm)
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	D76X450
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +5%	D76X450




Material : MS/ALUMINIUM
Customizable



NLH 9515

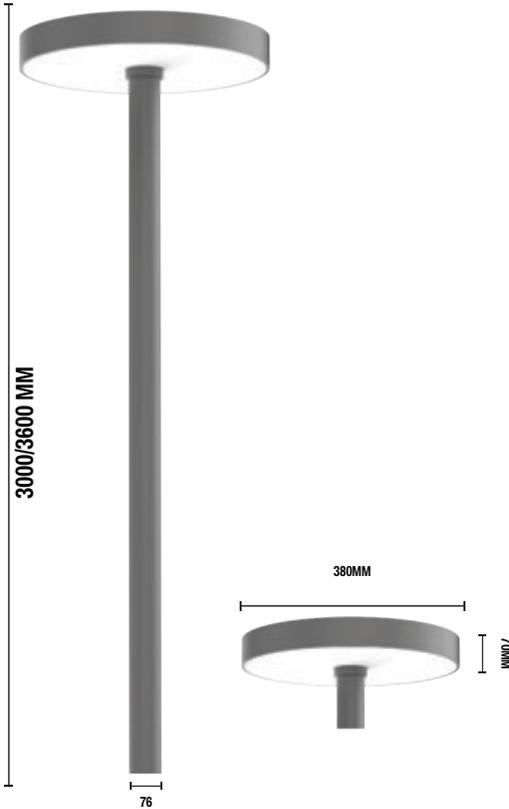

NLH 9516

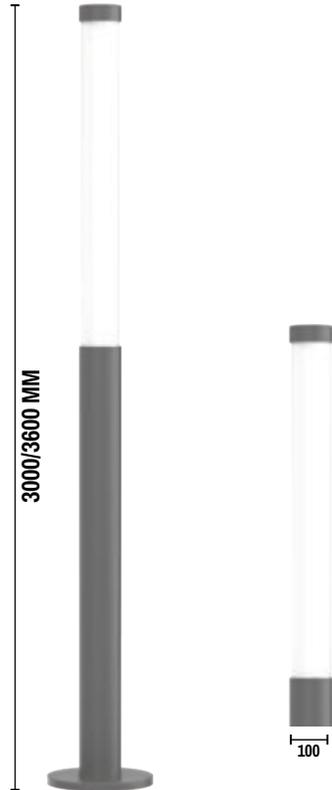

WATT	INPUT	OUTPUT	DIMENSION
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	D76X380
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +5%	D76X380



Material : MS/ALUMINIUM
Customizable




WATT	INPUT	OUTPUT	DIMENSION (mm)
36W	AC90-310V 50/60HZ	DC30-39V 900MA +5%	D100
50W	AC90-310V 50/60HZ	DC30-39V 1500MA +5%	D100



Material : MS/ALUMINIUM
Customizable



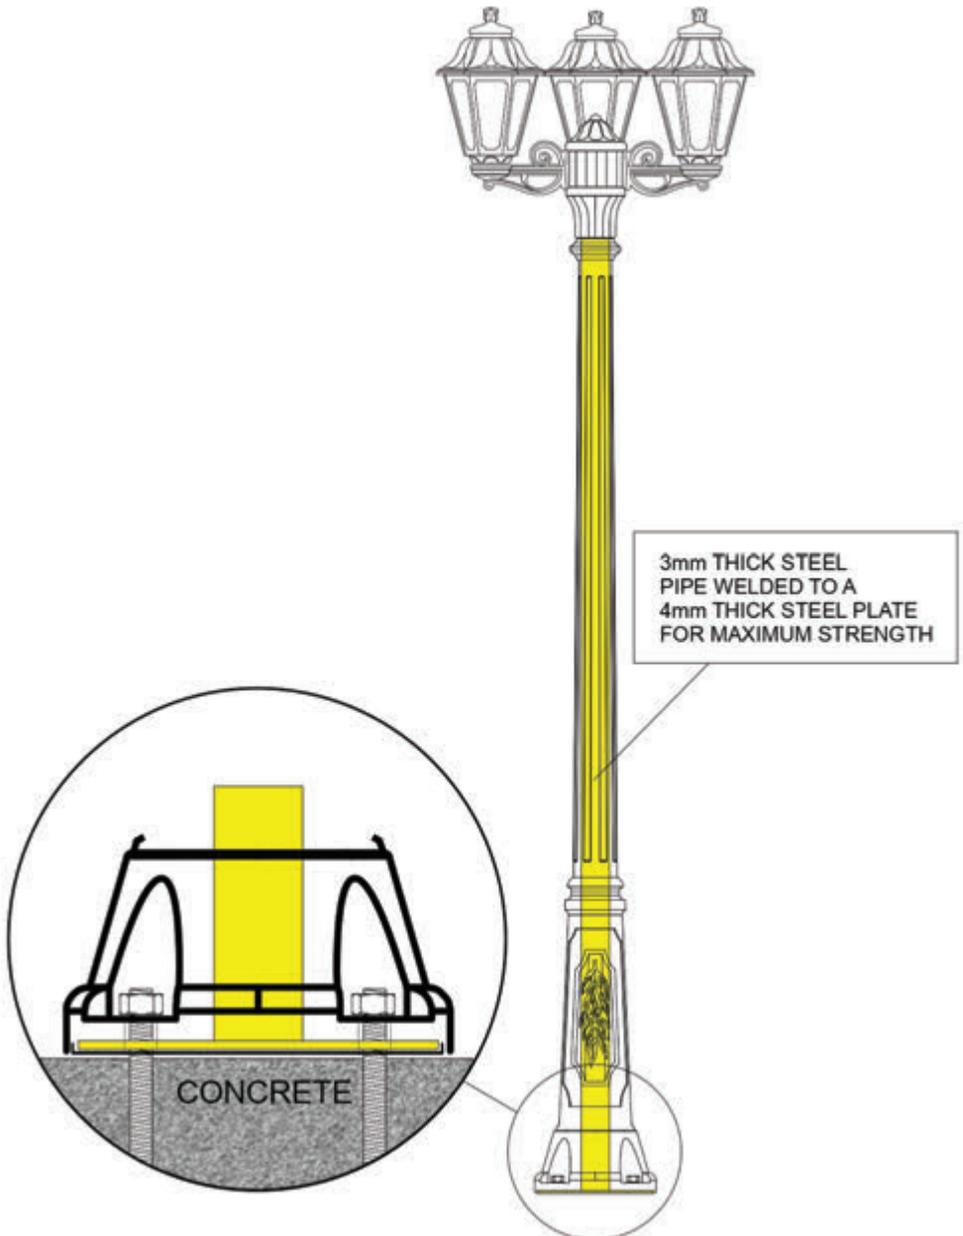

1

MANUFACTURED FROM PROPRIETARY RESIN
TO GIVE YEARS OF MAINTENANCE FREE SERVICE

2

NYLON SCREWS AND BOLTS FOR EASY
REPLACEMENT OF LAMP AND CLEANING

3

BULB ARRANGEMENT IN THE DOWNWARD
DIRECTION ENABLES ALL LIGHT TO FALL
ON THE GROUND WHERE IT IS ACTUALLY
REQUIRED!

4

DIFFUSER MADE FROM NON-YELLOWING
PMMA

5

AS THE FIXTURES ARE MADE IN INDIA,
ALL COMPONENTS ARE READILY AVAILABLE
IN EVENT OF ANY DAMAGE OR PILFERAGE



VINTAGE



GL-01

Clear



PL-01S

Clear



HD-01

Clear

BODY COLOUR



BLACK WHITE BROWN



ANTIQUE GREEN ANTIQUE BRONZE

VINTAGE (S)


VINTAGE(S)
GL-01




VINTAGE(S)
WB-01




VINTAGE(S)
PL-03L

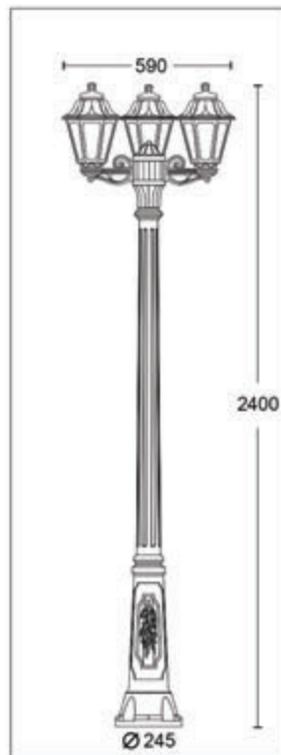


VINTAGE(S)
PL-01S

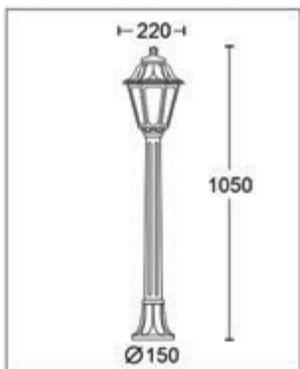


VINTAGE(S)
PL-01L

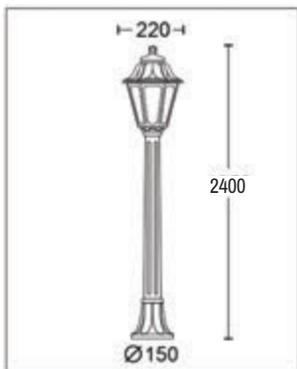


VINTAGE(S)
PL-02S



VINTAGE(S)
HD-01S



VINTAGE(S)
HL-01S



HOLDER
E27

IP55

VINTAGE



GL-01

OPAL



PL-02L

OPAL



HD-01


CLEAR

BODY COLOUR



VINTAGE (M)


VINTAGE(M)
GL-01

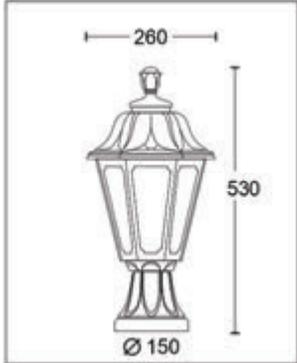


VINTAGE(M)
WB-01D




VINTAGE(M)
PL-03L

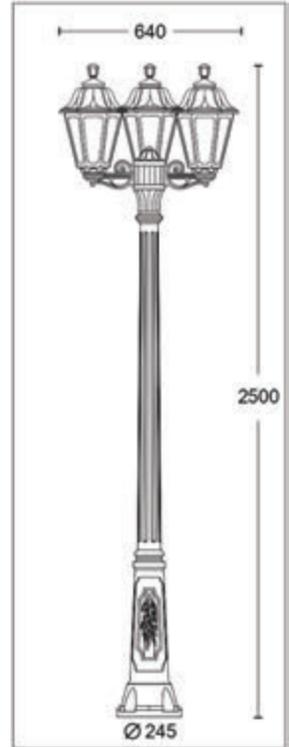


VINTAGE(M)
PL-01S

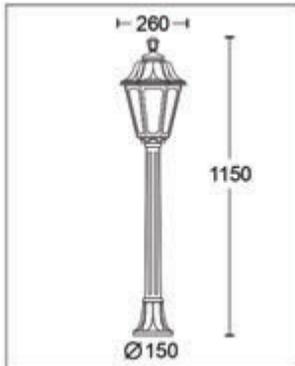


VINTAGE(M)
PL-01L

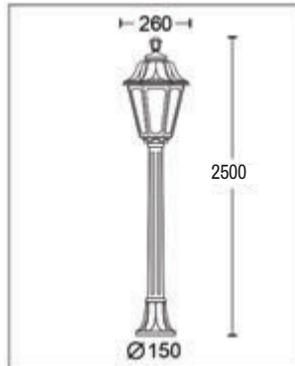


VINTAGE(M)
PL-02L



VINTAGE(M)
PL-03M



VINTAGE(M)
HD-01



HOLDER
E27

IP55

HISTORIC



GL-01

Clear

- BODY COLOUR
- BLACK
 - WHITE
 - BROWN
 - ANTIQUE GREEN
 - ANTIQUE BRONZE




WB-01


OPAL

HISTORIC (M)


**HISTORIC[M]
GL-01**

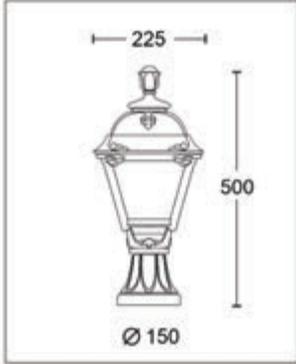


**HISTORIC[M]
WB-01**

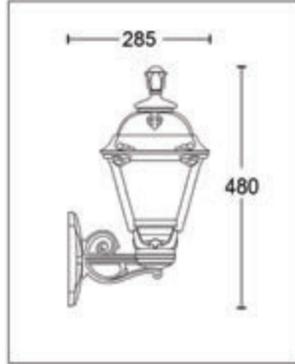


**HISTORIC(M)
PL-03L**

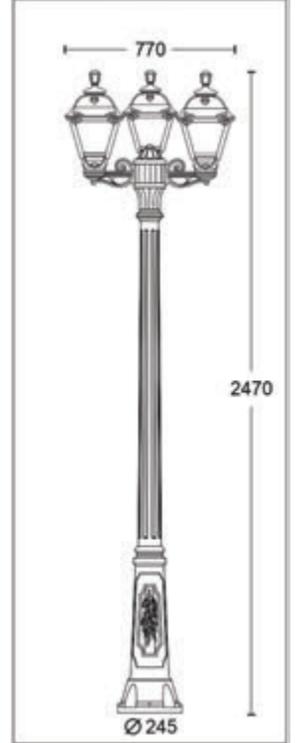


**HISTORIC[M]
PL-01S**

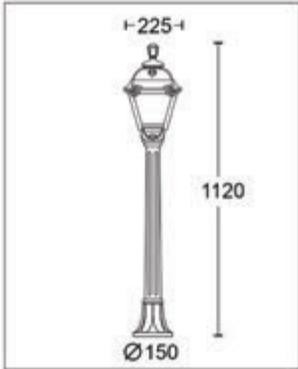


**HISTORIC[M]
PL-01L**

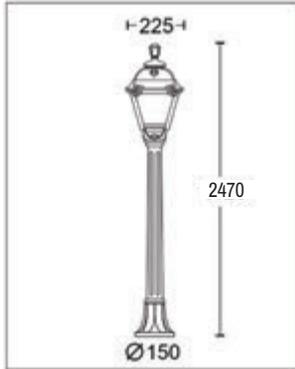


**HISTORIC[M]
HD-01M**



**HISTORIC[M]
HD-01M**



**HISTORIC[M]
PL-02L**



**HOLDER
E27**

IP55

LEGEND



BODY COLOUR

●
BLACK

HOLDER
E27

IP55






LUMINOUS BARRICADE LIGHT



LUMINOUS OBSTACLE BALL




SIZE: -500mm*550mm
Material: -terrazzo+nano light
Current : 24V
Weight : about 160kg





LUMINOUS ANTI COLLISION PILLAR






SIZE:-230MM*800MM
Material:-terrazzo+nano light
Current : 24V
Weight : about 65kg





LUMINOUS CURB STONE

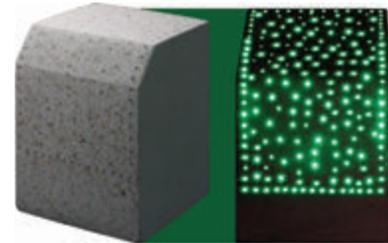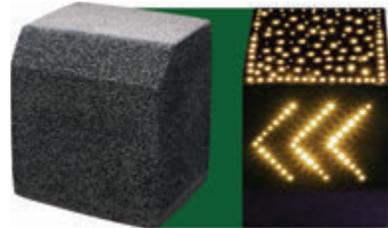


SIZE:-180*150MM*200
Material:-terrazzo+nano light
Current : 24V
Weight : about 11kg

ILLUMINATED PARKING SPACE STOPPER





SIZE:-480*150MM*130MM
Material:-terrazzo+nano light
Current : 24V
Weight : about 23kg



LUMINOUS BOARD



SIZE:-300*300MM
Material:-terrazzo+nano light
Current : 24V
Weight : about 8.5kg



IP 65 CONNECTOR



WIRE CONNECTOR-10MM FOR STRIP IP65
WIRE CONNECTOR-8MM FOR STRIP IP65



STRAIGHT CONNECTOR-10MM FOR STRIP IP65
STRAIGHT CONNECTOR-8MM FOR STRIP IP65



L CONNECTOR-10MM FOR STRIP IP65
L CONNECTOR-8MM FOR STRIP IP65

IP65

CONNECTOR STRAIGHT

CONNECTOR T TYPE



IP68



IP68

DRIVER




- 3-5W HIGH PF ISOLATED 250MA DRIVER
- 4-7W HIGH PF ISOLATED 300MA DRIVER
- 8-12W HIGH PF ISOLATED 250MA DRIVER
- 18-24W HIGH PF ISOLATED 600MA DRIVER
- 30-36W HIGH PF ISOLATED 900MA DRIVER
- 50W HIGH PF ISOLATED 1500MA DRIVER

IP65



FIBER OPTIC

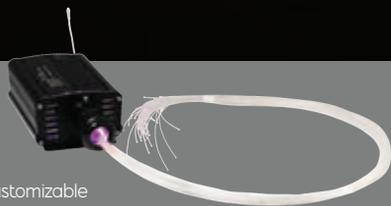

Customizable



FACADE LIGHT

Customizable



NEONZ LIGHTS PVT LTD
AHMEDABAD, INDIA.

www.neonzlights.com | info@neonzlights.com

